


- NOTE:**
1. INLET AND PIPE PROTECTION ITEMS SHOWN ON THE TEMPORARY STORM SEWER - I-74 EROSION AND SEDIMENT CONTROL PLANS SHALL BE USED FOR PROTECTION FROM EROSION AND CONTROL OF SEDIMENT IN THE AREAS OF DISTURBANCE AS INDICATED IN THE TEMPORARY STORM SEWER PLANS - I-74. SEE TEMPORARY STORM SEWER PLANS - I-74 FOR ADDITIONAL INFORMATION.
 2. TEMPORARY EROSION CONTROL SEEDING HAS BEEN CALCULATED BY ESTIMATING THREE APPLICATIONS OVER THE ENTIRE PROJECT LIMITS. SEE SEEDING SCHEDULE FOR TEMPORARY EROSION CONTROL SEEDING QUANTITY AND BDE 2342, THE STORM WATER POLLUTION PREVENTION PLAN IN THE PROJECT SPECIFICATIONS, FOR STABILIZATION PRACTICES.
 3. INLET FILTERS FOR MEDIAN INLETS TO BE REMOVED WHEN PAVEMENT IS PLACED ADJACENT TO DRAINAGE STRUCTURES OR AS DIRECTED BY THE ENGINEER.



TEMP. DITCH CHECK SPACING		
SLOPE %	HEIGHT AT CENTER OF DITCH CHECK (OVERFLOW PT) (INCHES)	SPACING OF DITCH CHECK (FEET)
8.0	12"	13
	18"	20
	24"	26
7.0	12"	14
	18"	21
	24"	28
6.0	12"	17
	18"	26
	24"	34
5.0	12"	20
	18"	30
	24"	40
4.0	12"	25
	18"	38
	24"	50
3.0	12"	33
	18"	50
	24"	66
2.0	12"	50
	18"	75
	24"	100
1.0 & UNDER	12"	100
	18"	150
	24"	200

FILE NAME =	DESIGNED - LDC	REVISED -
...D468620-sh1-1-74-TEMP-MDeros19.dgn	DRAWN - JLT	REVISED -
USER NAME = IDOT	CHECKED - GEB	REVISED -
PLOT DATE = 7/16/2012	DATE - JULY 20, 2012	REVISED -

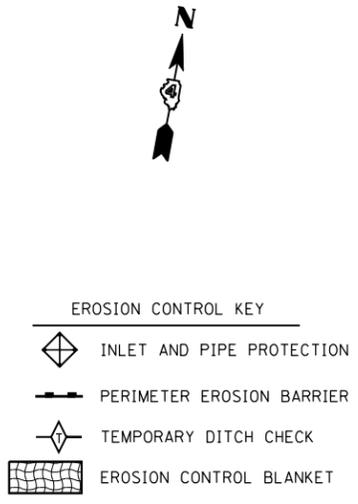

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

TEMPORARY STORM SEWER - 1-74 EROSION AND SEDIMENT CONTROL PLAN		
SCALE: 1"=50'	SHEET NO. 4 OF 4 SHEETS	STA. 546+00.00 TO STA. 561+00.00

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
90-[14R;14HB-4,14,14HVB]BR	TAZEWELL	2433	1343	
CONTRACT NO. 68620				
ILLINOIS FED. AID PROJECT				