
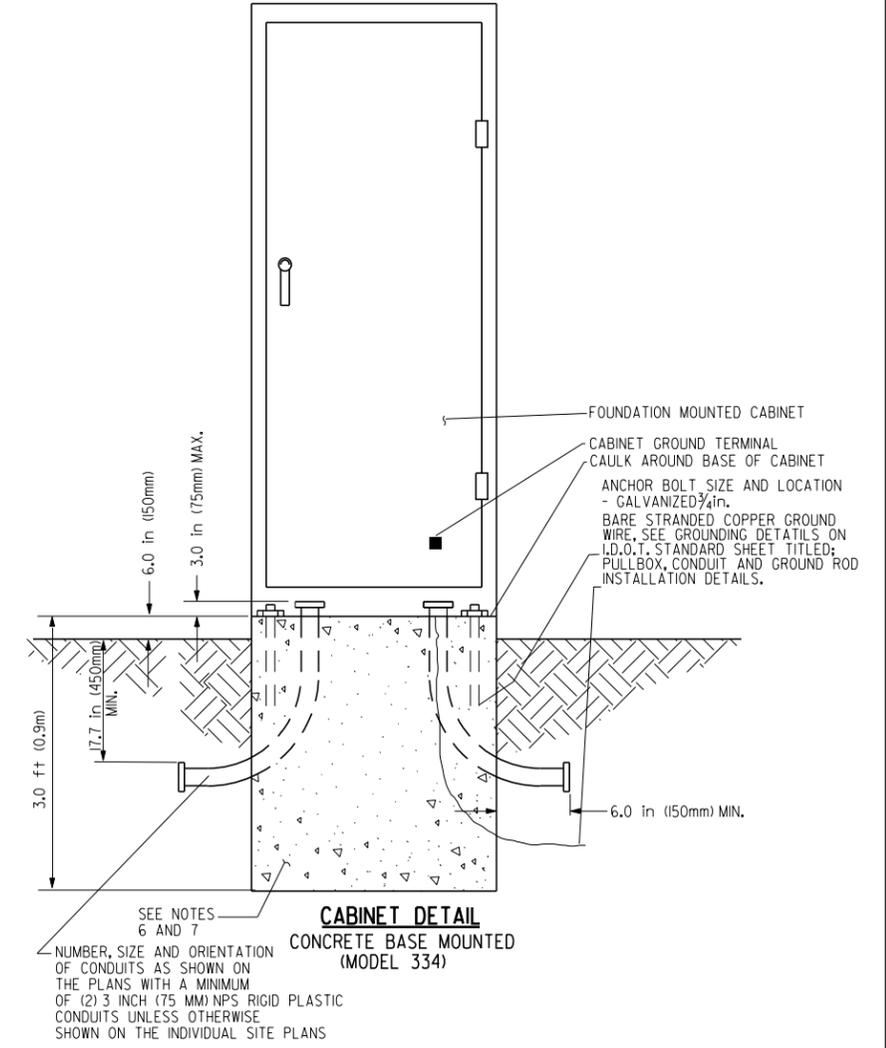
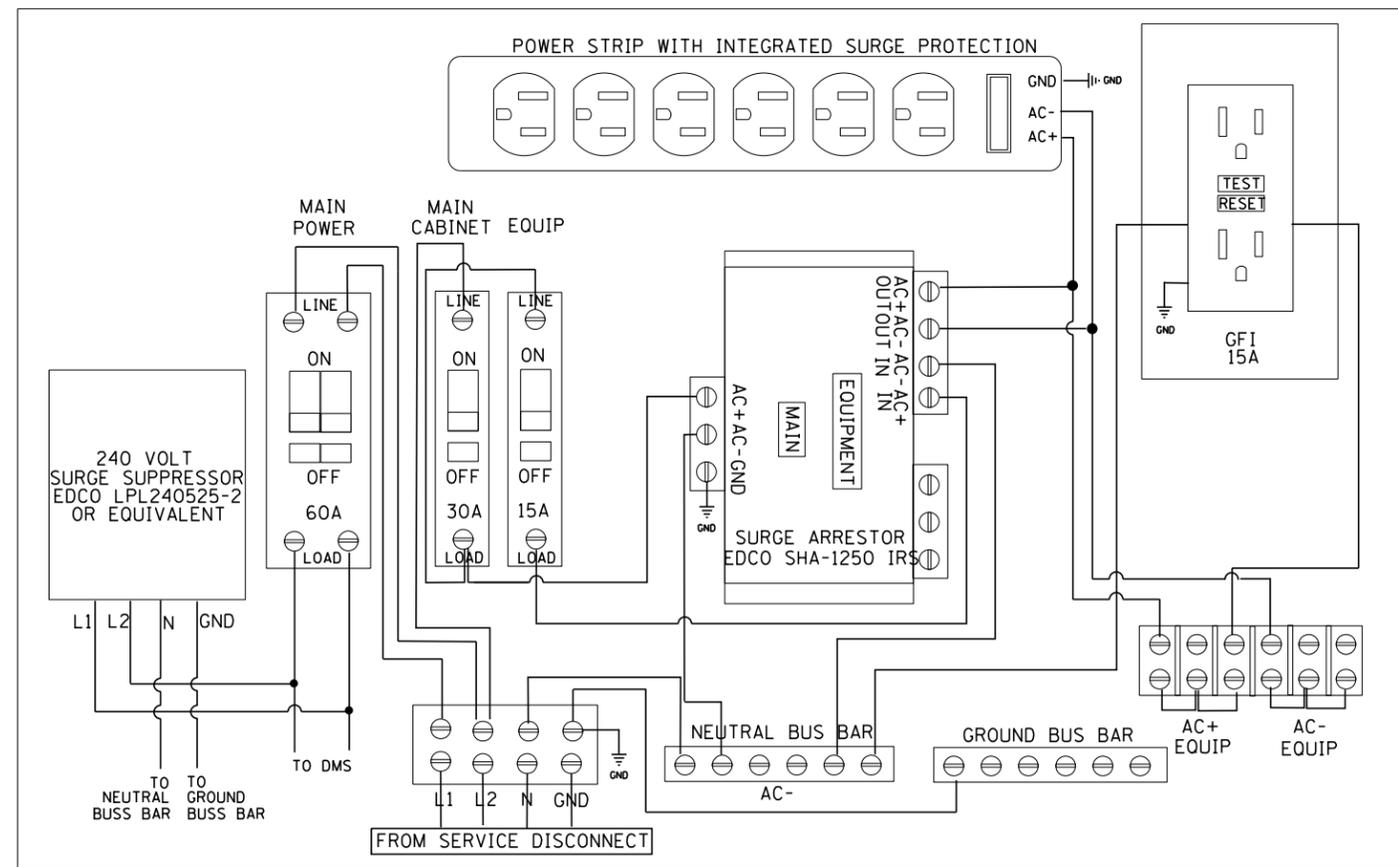


- NOTES (MODEL 334 CABINET):**
- REFER TO SPECIAL PROVISIONS FOR CABINET DETAILS AND ADDITIONAL REQUIREMENTS.
 - CABINET ENTRIES INCLUDE VERTICAL ARRANGEMENT FOR MAJOR EQUIPMENT ITEMS ONLY.
 - THERE WILL BE ADDITIONAL ITEMS INSTALLED IN THE CABINET ON SIDE AND BACK PANELS AS PER THE SPECIAL PROVISIONS.
 - PROVIDE ALL UNUSED SPACE AT BOTTOM OF CABINET.
 - THE CONTRACTOR SHALL INSTALL INSULATED BUSHINGS AND DUCT SEALANT AT ALL CONDUIT BEND TERMINATIONS IN FOUNDATIONS.
 - CONCRETE BASE TO BE FORMED AT LEAST 6.0 in (150mm) BELOW THE GROUND SURFACE.
 - CONCRETE BASE MUST BE CAST IN PLACE.
 - THE CABINET SHALL BE EQUIPPED WITH A THERMOSTATICALLY CONTROLLER VENTILATION FAN, DELUXE PLEATED FILTER, POWER PANEL, 96 FIBER RACK MOUNTED ENCLOSURE WITH SPLICE TRAYS, 19" MOUNTING RAILS, EQUIPMENT SHELF, AND SLIDE OUT DRAWER WITH STORAGE.
 - ALL WORK INDICATED SHALL BE PAID FOR UNDER ITEM CABINET, MODEL 334 EXCLUSIVE OF THE CONCRETE FOUNDATION.

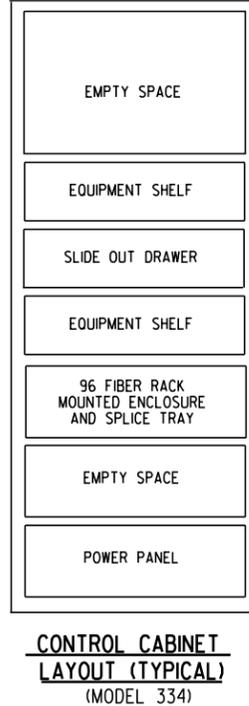

FILE NAME = ... \ITS (DDT)\D468620-ITS-50.dgn	USER NAME = tblank	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	TYPE 334 CABINET DETAIL I-74 & WASHINGTON BLACKTOP DMS LOCATION ONLY			F.A.P. RT.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
	PLOT SCALE =	DRAWN -	REVISED -		SCALE: NONE	SHEET NO. 50 OF 50 SHEETS	STA.	TO STA.	74	90-[14R]14HB-4,14,14HB[BR]	TAZEWELL	2433	1714
	PLOT DATE = 7/17/2012	CHECKED -	REVISED -										
		DATE -	REVISED -										

CONTRACT NO. 68620
ILLINOIS FED. AID PROJECT