


GENERAL NOTES:

1. Plan dimensions and details relative to existing plans are subject to nominal construction variations. The Contractor shall field verify existing dimensions and details affecting new construction and make necessary approved adjustments prior to construction or ordering of materials. Such variations shall not be cause for additional compensation for a change in scope of the work, however, the Contractor will be paid for the quantity actually furnished at the unit price bid for the work.
2. Work to be performed before Pre Stage-Sub Stage A of the MOT plans.
3. Work must be performed during off-peak hours and per the IDOT Highway Standards.
4. Deck drains (downspouts, floor drains, and scuppers) shall be cleaned prior to placement of the Hot-Mix Asphalt Surface Course overlay. Cost of cleaning the deck drains is included in Hot-Mix Asphalt Surface Course Mix "E", N50.
5. After placement of the bridge deck overlay, the Resident Engineer shall notify the District Bridge Maintenance Engineer of the "as constructed" overlay thickness for updating the Illinois Highway Information System.

TOTAL BILL OF MATERIAL


ITEM	UNIT	SUPER	SUB	TOTAL
Polymerized Bituminous Materials (Prime Coat)	Ton	0.6		0.6
Hot-Mix Asphalt Surface Removal - Butt Joint	Sq. Yd.	1,027		1,027
Temporary Ramp	Sq. Yd.	172		172
Hot-Mix Asphalt Surface Course Mix "E", N50	Ton	211.2		211.2

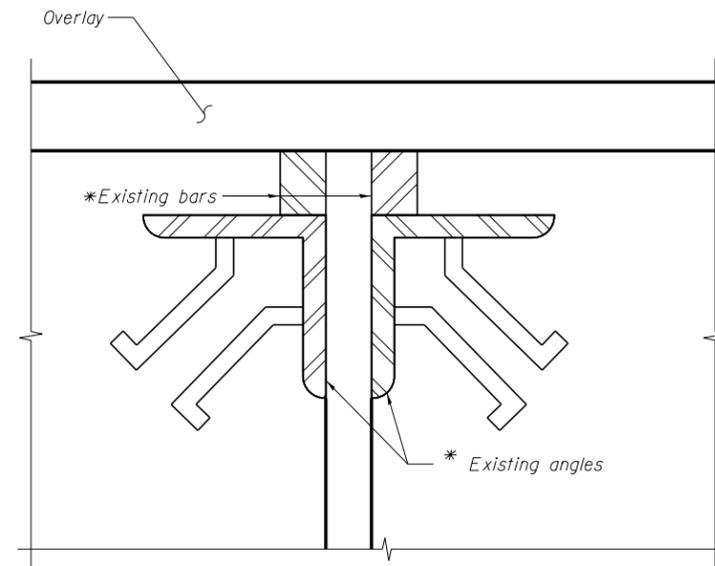

Note: Per inspection, the existing joint opening is closed. Contractor to pave over existing joint. Overlay may pop-out which may result in a minimum bump.


DETAIL "A"

* Field conditions may vary.

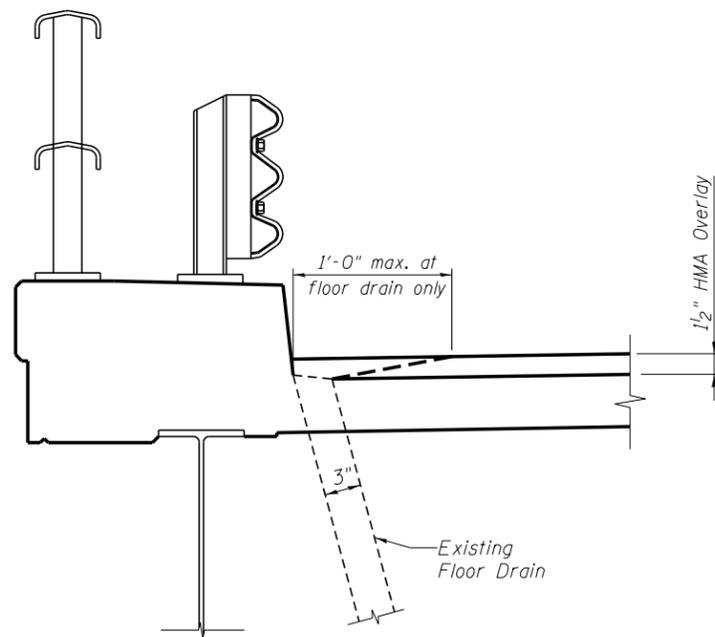


SECTION A-A

CONCRETE OVERLAY AT FLOOR DRAIN

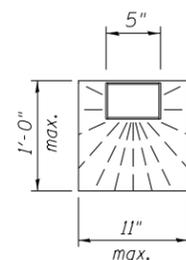

***FLOOR DRAIN PLAN**

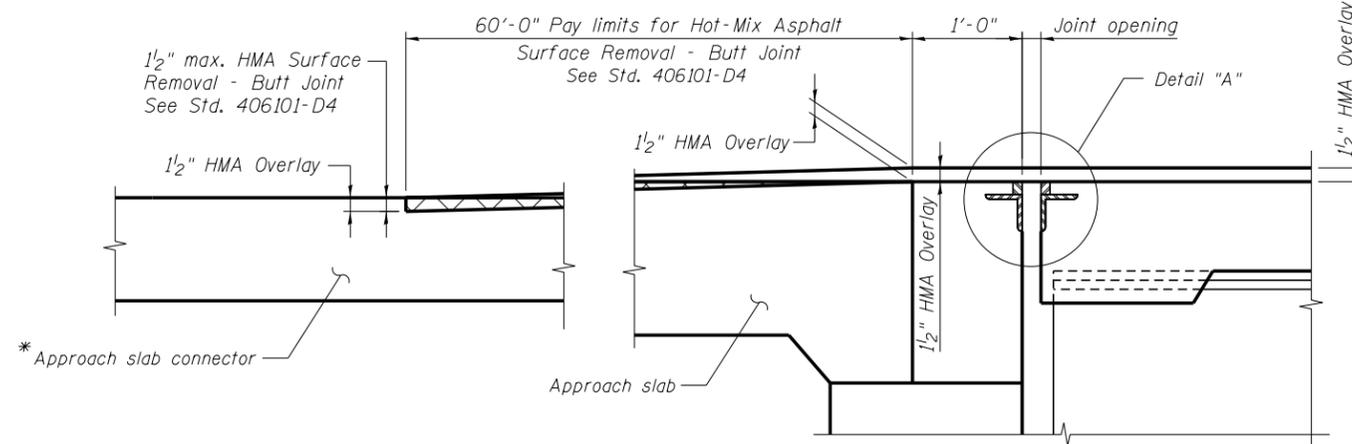

SURFACE REMOVAL & OVERLAY TRANSITION DETAIL

FILE NAME =	USER NAME = mbecker	DESIGNED - DMS	REVISED -
0900014_68620_02_brdkr.dgn		CHECKED - MRB	REVISED -
	PLOT SCALE =	DRAWN - PRT	REVISED -
	PLOT DATE = 7/16/2012	CHECKED - MRB	REVISED -

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
74	90-[14R;14HB-4,14,14HVB]BR	TAZEWELL	2433	1862
			CONTRACT NO. 68620	
ILLINOIS FED. AID PROJECT				