


STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION  
DIVISION OF HIGHWAYS  
PLANS FOR PROPOSED HIGHWAY

FOR INDEX OF SHEETS, SEE SHEET 2

FA. RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAB.	2006-015 I	VARIOUS	14	1

D-91-329-06  
CONTRACT NO. 60B39

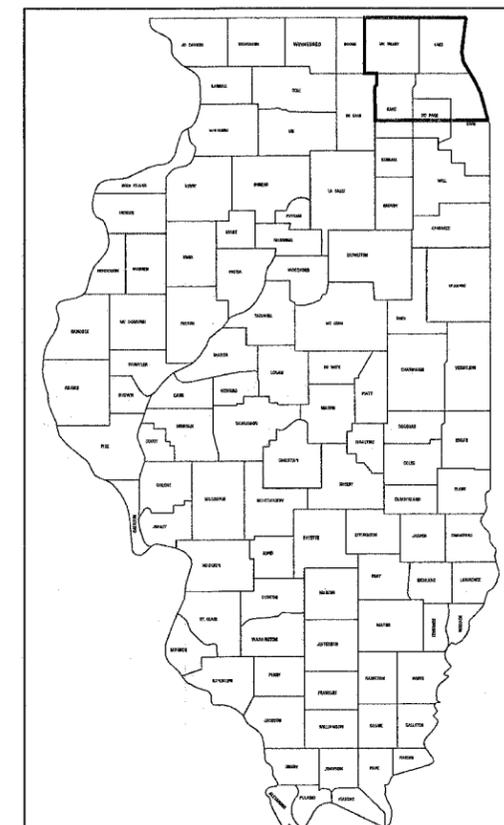

THIS SECTION IS LOCATED ALONG VARIOUS ROUTES WITHIN THE DISTRICT ONE COUNTIES OF MC HENRY, LAKE, KANE, DU PAGE, COOK AND WILL.

SCALES { PLAN  
PROFILE HORIZ.  
PROFILE VER.  
CROSS SECTIONS

ROUTE: VARIOUS EXPRESSWAYS AND ARTERIAL  
HIGHWAYS – NORTHERN PART, DISTRICT ONE  
SECTION: 2006-015 I  
FENCE REPAIR  
COUNTY: VARIOUS DISTRICT WIDE  
C-91-329-06

SEE LOCATION MAPS  
SHEETS 4 THRU 8

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION  
DIVISION OF HIGHWAYS

SUBMITTED Sept. 11, 2006  
Diane O'Keefe / Cof  
SUPERVISOR OF HIGHWAYS/BRIDGE ENGINEER

October 13, 2006  
Mike New / PD  
ENGINEER OF DESIGN AND ESTIMATION

October 13, 2006  
Milton R. Sauer, P.E. / PD  
DIRECTOR, DIVISION OF HIGHWAYS

PRINTED BY AUTHORITY OF THE  
STATE OF ILLINOIS

REGION ONE – BUREAU OF DESIGN:  
PLAN PREPARATION ENGINEER: K. ENGR. BORO (847) 705-4178

CONTRACT NO. 60B39

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR.	2006-015 I	VAR.	14	2
STA.		TO STA.		
FED. ROAD DIST. NO.		ILLINOIS FED. AID PROJECT		

**INDEX OF SHEETS**

1. TITLE SHEET
2. INDEX OF SHEETS  
LIST OF APPLICABLE STATE STANDARDS
3. SUMMARY OF QUANTITIES
4. COOK COUNTY (NORTH OF ILL. 38) LOCATION MAP
5. DUPAGE COUNTY (NORTH OF ILL. 38) LOCATION MAP
6. KANE COUNTY (NORTH OF ILL. 38) LOCATION MAP
7. LAKE COUNTY LOCATION MAP
8. MCHENRY COUNTY LOCATION MAP
9. DETAILS OF PEDESTRIAN BARRIER TYPE III (STD. 10-SS-514R)
10. CHAIN LINK FENCE (STD. 10-SS-506B)
11. CHAIN LINK FENCE POST SLEEVE REPAIR DETAIL
12. PROPOSED PEDESTRIAN BARRIER AND CHAIN LINK FENCE  
WITH TENSION WIRE AND FENCE RAIL REMOVAL
13. SPECIAL DETAILS
14. TRAFFIC CONTROL DETAILS FOR SHOULDER CLOSURE AND  
PARTIAL RAMP CLOSURES

**STATE STANDARDS**

- 664001-01
- 665001-01
- 701001-01
- 701006-02
- 701101-01
- 701106-01
- 701201-02
- 701301-02
- 701400-02
- 701401-03
- 701411-03
- 701421-01
- 701422-01
- 701501-03
- 701606-04
- 701701-04
- 701801-03

PLOT DATE = 9/28/2006  
 FILE NAME = C:\Users\j... \147395\147395.dwg  
 USER NAME = j... \j...

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION  
**INDEX OF SHEETS AND  
 STATE STANDARDS**

SCALE: VERT.  
 HORIZ.  
 DATE

DRAWN BY  
 CHECKED BY

CODE NO.	ITEM DESCRIPTION	UNIT	TOTAL	Y102 URBAN 100% STATE	
				CONT. MAINT.	MCHD
66400505	CHAIN LINK FENCE, 8'	FOOT	215	170	45
66410300	CHAIN LINK FENCE REMOVAL	FOOT	50	40	10
66410705	CHAIN LINK GATES (SPECIAL)	SQ FT	875	700	175
66500105	WOVEN WIRE FENCE, 4'	FOOT	2500	2000	500
X0300160	PULL POST ARRANGEMENT	EACH	2	1	1
X0321153	CHAIN LINK FENCE POST SLEEVE REPAIR	EACH	50	40	10
X6640100	FENCE RAIL REMOVAL	FOOT	2000	1600	400
Z0009600	CHAIN LINK FABRIC, SPECIAL, 5'-0"	FOOT	25	20	5
Z0009700	CHAIN LINK FABRIC, SPECIAL, 6'-0"	FOOT	1600	1320	280
Z0009800	CHAIN LINK FABRIC, SPECIAL, 7'-0"	FOOT	10	8	2
Z0009810	CHAIN LINK FABRIC, SPECIAL, 8'-0"	FOOT	75	60	15
Z0009900	CHAIN LINK FABRIC, TYPE 1, 4'-0"	FOOT	21000	16800	4200
Z0010300	CHAIN LINK FABRIC, TYPE 3, SPECIAL	FOOT	500	400	100
Z0033200	LINE POST, TYPE 1	EACH	900	720	180
Z0033305	LINE POST, TYPE 3 (SPECIAL)	EACH	25	20	5
Z0042500	POST, SPECIAL	EACH	75	60	15
Z0042505	POST REMOVAL AND REPLACEMENT	EACH	5	4	1
Z0074000	TERMINAL POST, TYPE 1	EACH	50	40	10
Z0074010	TERMINAL POST, TYPE 3 SPECIAL	EACH	5	4	1

PLOT DATE = 9/28/2006  
 FILE NAME = c:\work\proj\47393\47393.dwg  
 USER NAME = p123456

REVISIONS		ILLINOIS DEPARTMENT OF TRANSPORTATION
NAME	DATE	
		SUMMARY OF QUANTITIES


SCALE: VERT. \_\_\_\_\_  
 DATE \_\_\_\_\_

DRAWN BY \_\_\_\_\_  
 CHECKED BY \_\_\_\_\_



F.A. NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR. 2006-015 I	*		14	5
STA.	TO STA.			
FED. ROAD DIST. NO.	343005	FED. AID PROJECT		

\* VARIOUS  
CONTRACT NO. 60B39

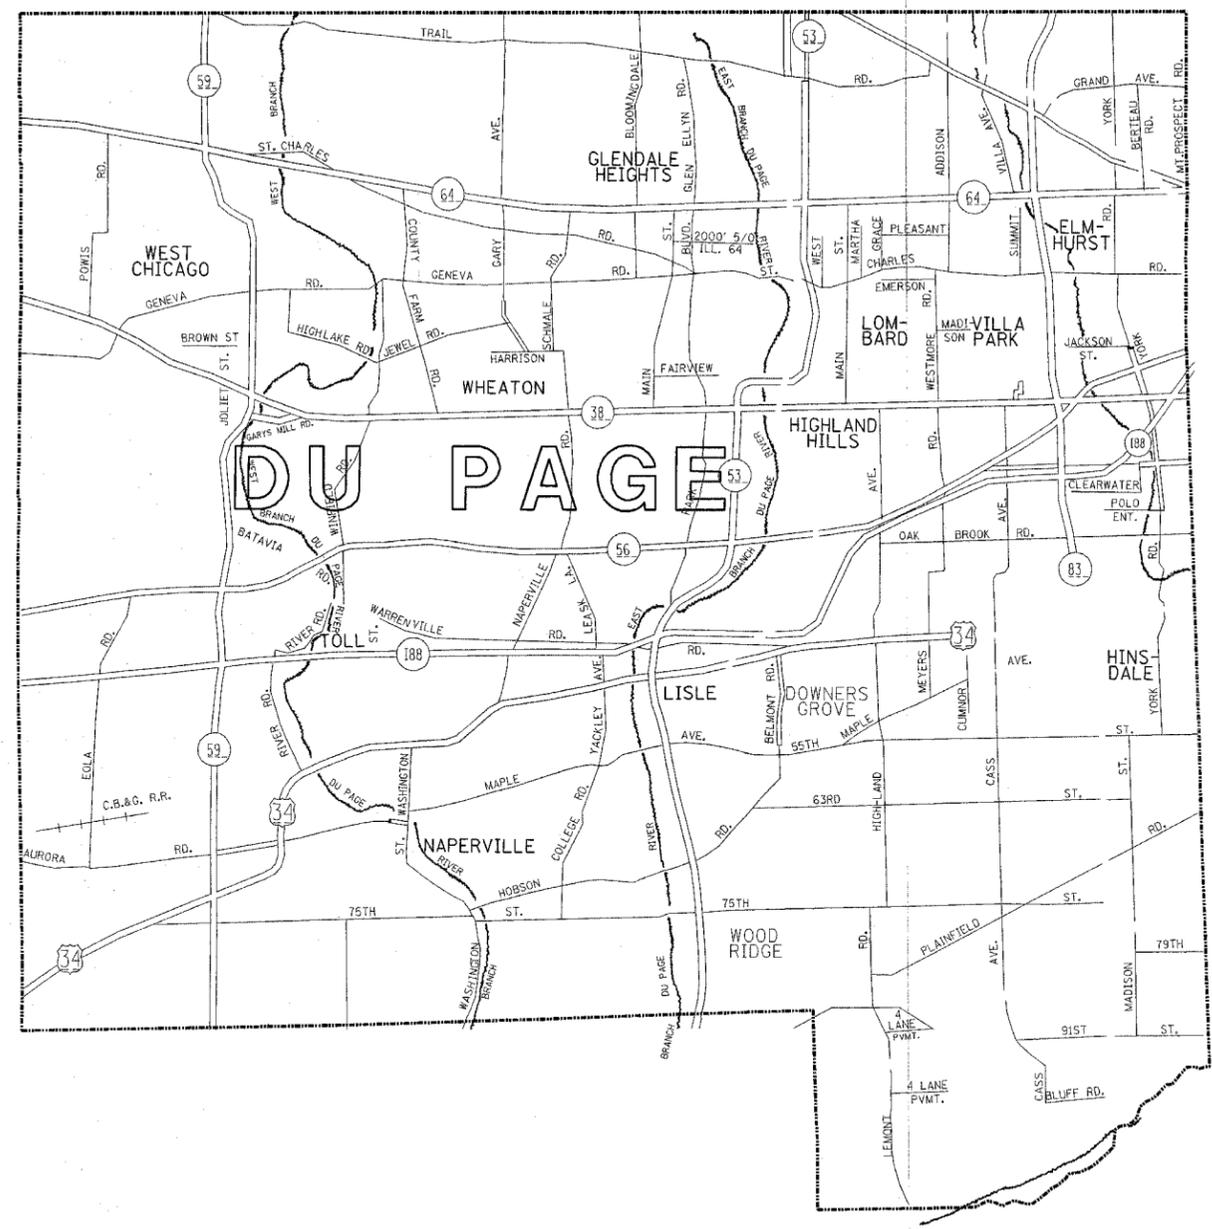

- DISTRICT NO. 1**
- CITY MAINTENANCE AGREEMENTS UNDER STATE JURISDICTION
  - - - FUTURE HIGHWAYS
  - VARIOUS AGENCIES HIGHWAYS

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION  
NORTHERN PART, DISTRICT 1


FENCE REPAIR  
DU PAGE COUNTY  
NORTH AND INCLUDING OF IL. ROUTE 38

SCALE: 1"=1.5 MILES  
DATE: 9/28/2006

DRAWN BY  
CHECKED BY

F. A. SHEET	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR. 200-016 1	*	KANE	14	6
STA.	TO STA.			
FED. ROAD DIST. NO.	BLDG.	FED. AID PROJECT		

\* VARIOUS  
CONTRACT NO. 60B39

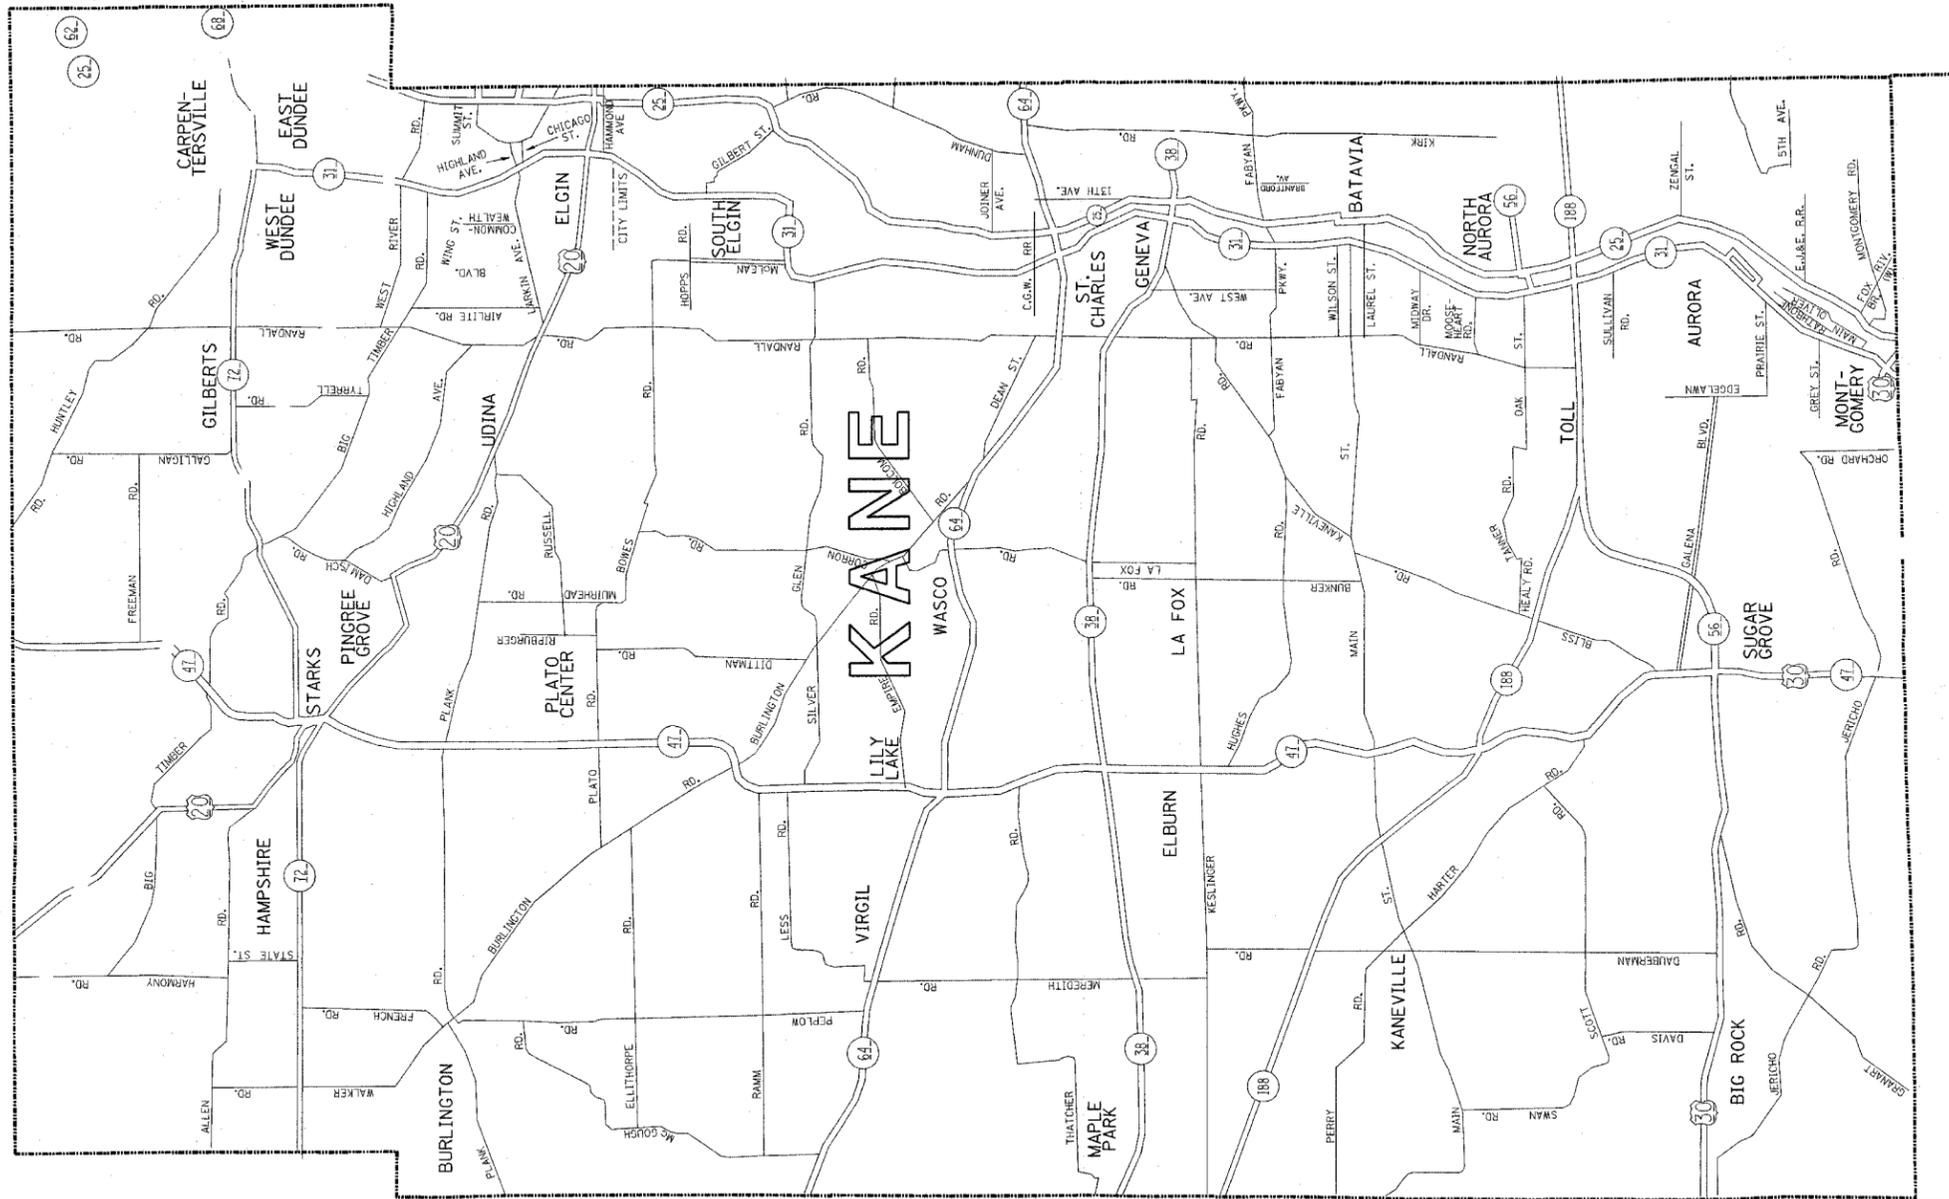

### DISTRICT NO. 1


-  STATE HIGHWAYS & EXPRESSWAYS WITHIN STATE JURISDICTION. (EXCEPT TOLLWAYS)
-  CITY MAINTENANCE AGREEMENTS UNDER STATE JURISDICTION
-  FUTURE HIGHWAYS
-  VARIOUS AGENCIES HIGHWAYS

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION  
NORTHERN PART, DISTRICT 1  
FENCE REPAIR  
LOCATION MAP  
KANE COUNTY  
NORTH OF AND INCLUDING IL. ROUTE 38  
SCALE: 1"=1.5 MILES  
DATE: 9/28/2006  
DRAWN BY  
CHECKED BY

F.A. NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR. 2006-015 1	*	14	7	
STA.	TO STA.			
FED. ROAD DIST. NO.	BALANCE	FED. AID PROJECT		

\* MC HENRY, LAKE, KANE, DU PAGE AND COOK  
CONTRACT NO. 60B39

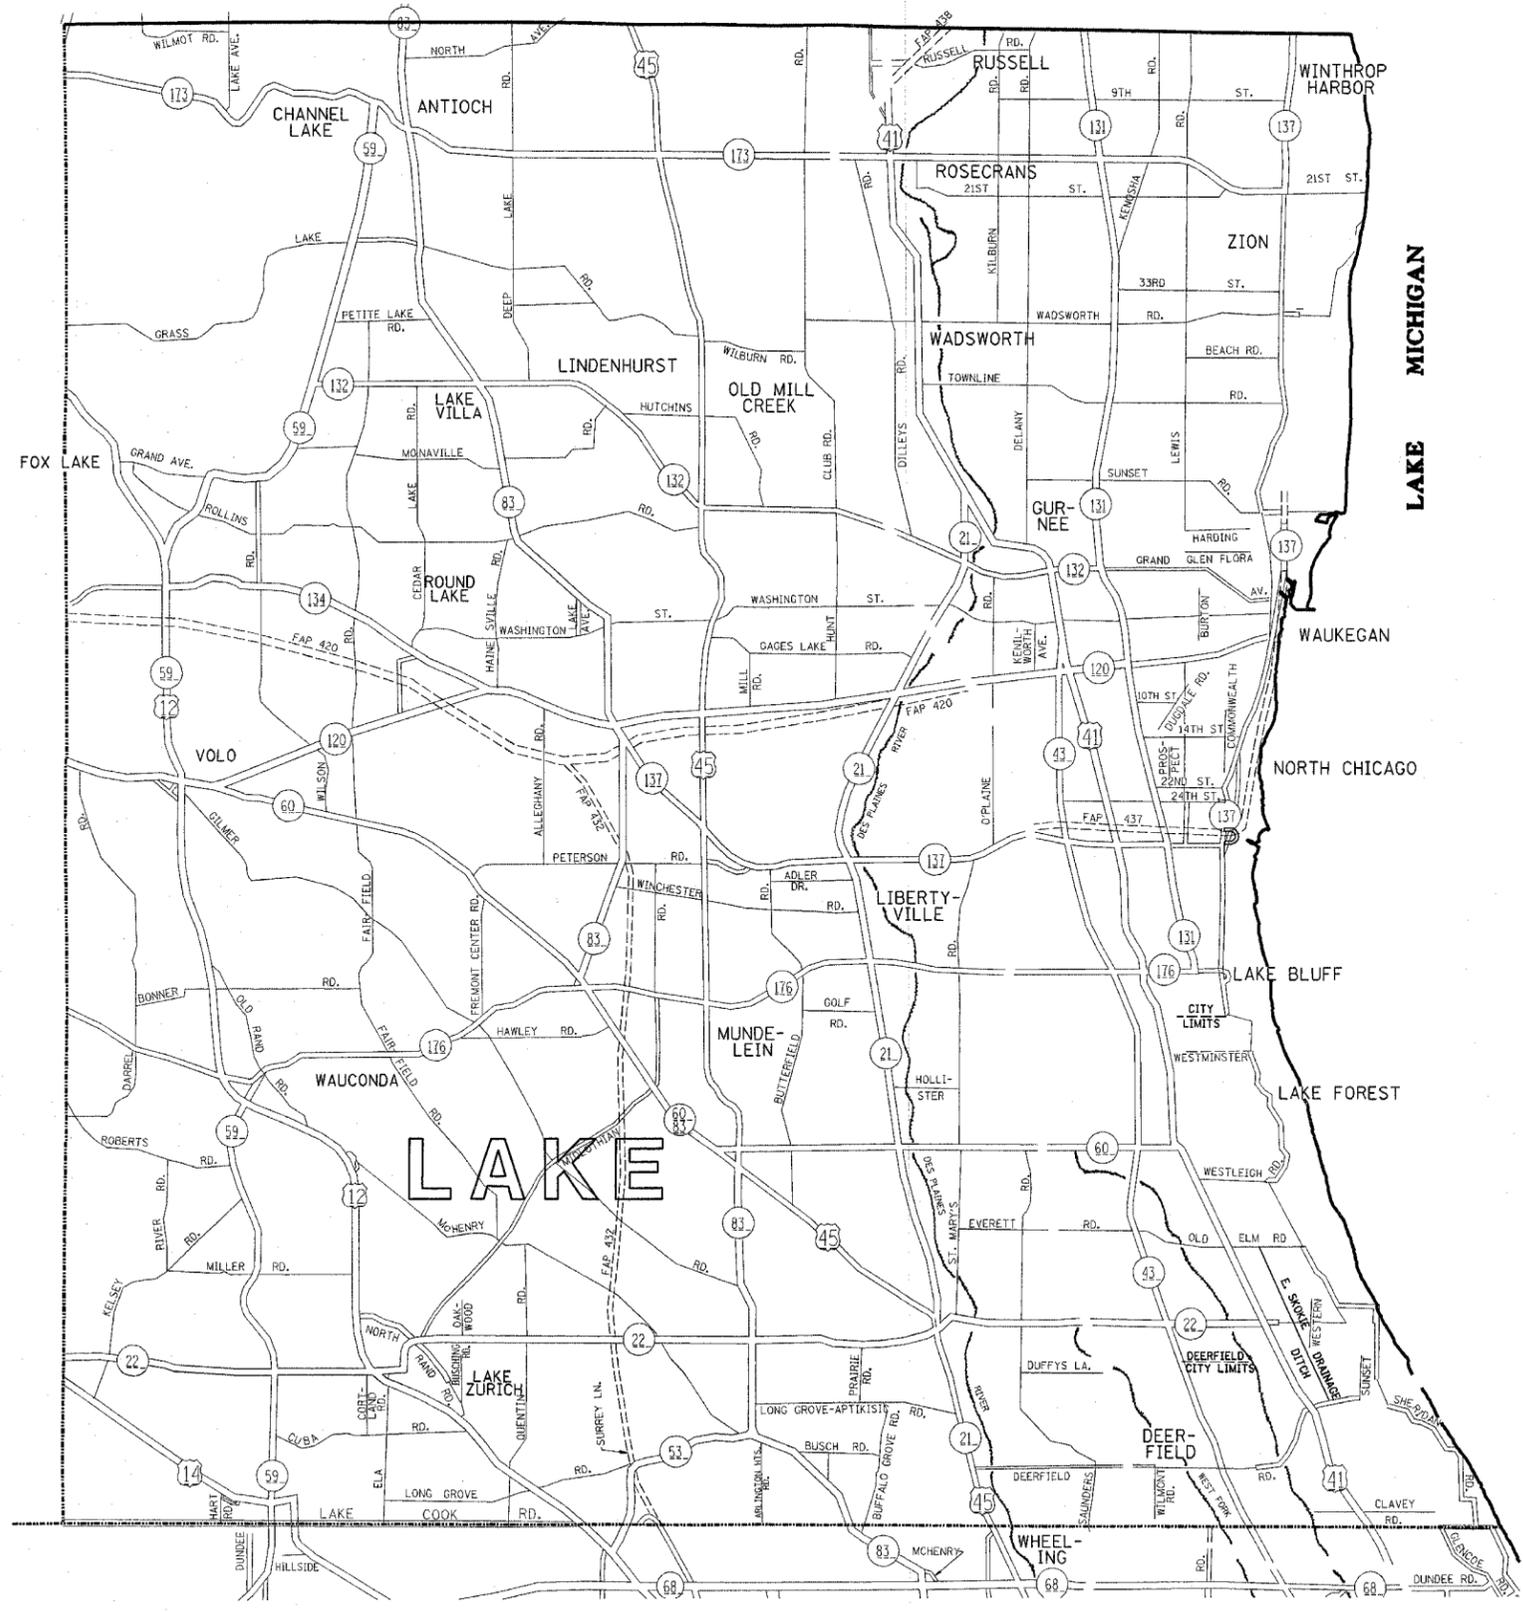

**DISTRICT NO. 1**

- STATE HIGHWAYS & EXPRESSWAYS WITHIN STATE JURISDICTION. (EXCEPT TOLLWAYS)
- CITY MAINTENANCE AGREEMENTS UNDER STATE JURISDICTION
- FUTURE HIGHWAYS
- VARIOUS AGENCIES HIGHWAYS

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION  
NORTHERN PART, DISTRICT 1

FENCE REPAIR  
LOCATION MAP  
LAKE COUNTY


SCALE: 1"=1.5 MILES  
DATE: 9/28/2006

DRAWN BY  
CHECKED BY

9/28/2006  
c:\p\projects\m147393\m147393.dwg


F. & A. DIST.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR. 2005-025 1	*	14	8	
STA.	TO STA.			
FED. ROAD DIST. NO.	EAJMS	FED. AID PROJECT		

\* MC HENRY, LAKE, KANE, DU PAGE AND COOK  
 CONTRACT NO. 60B39



**DISTRICT NO. 1**

- STATE HIGHWAYS & EXPRESSWAYS WITHIN STATE JURISDICTION. (EXCEPT TOLLWAYS)
- CITY MAINTENANCE AGREEMENTS UNDER STATE JURISDICTION
- FUTURE HIGHWAYS
- VARIOUS AGENCIES HIGHWAYS

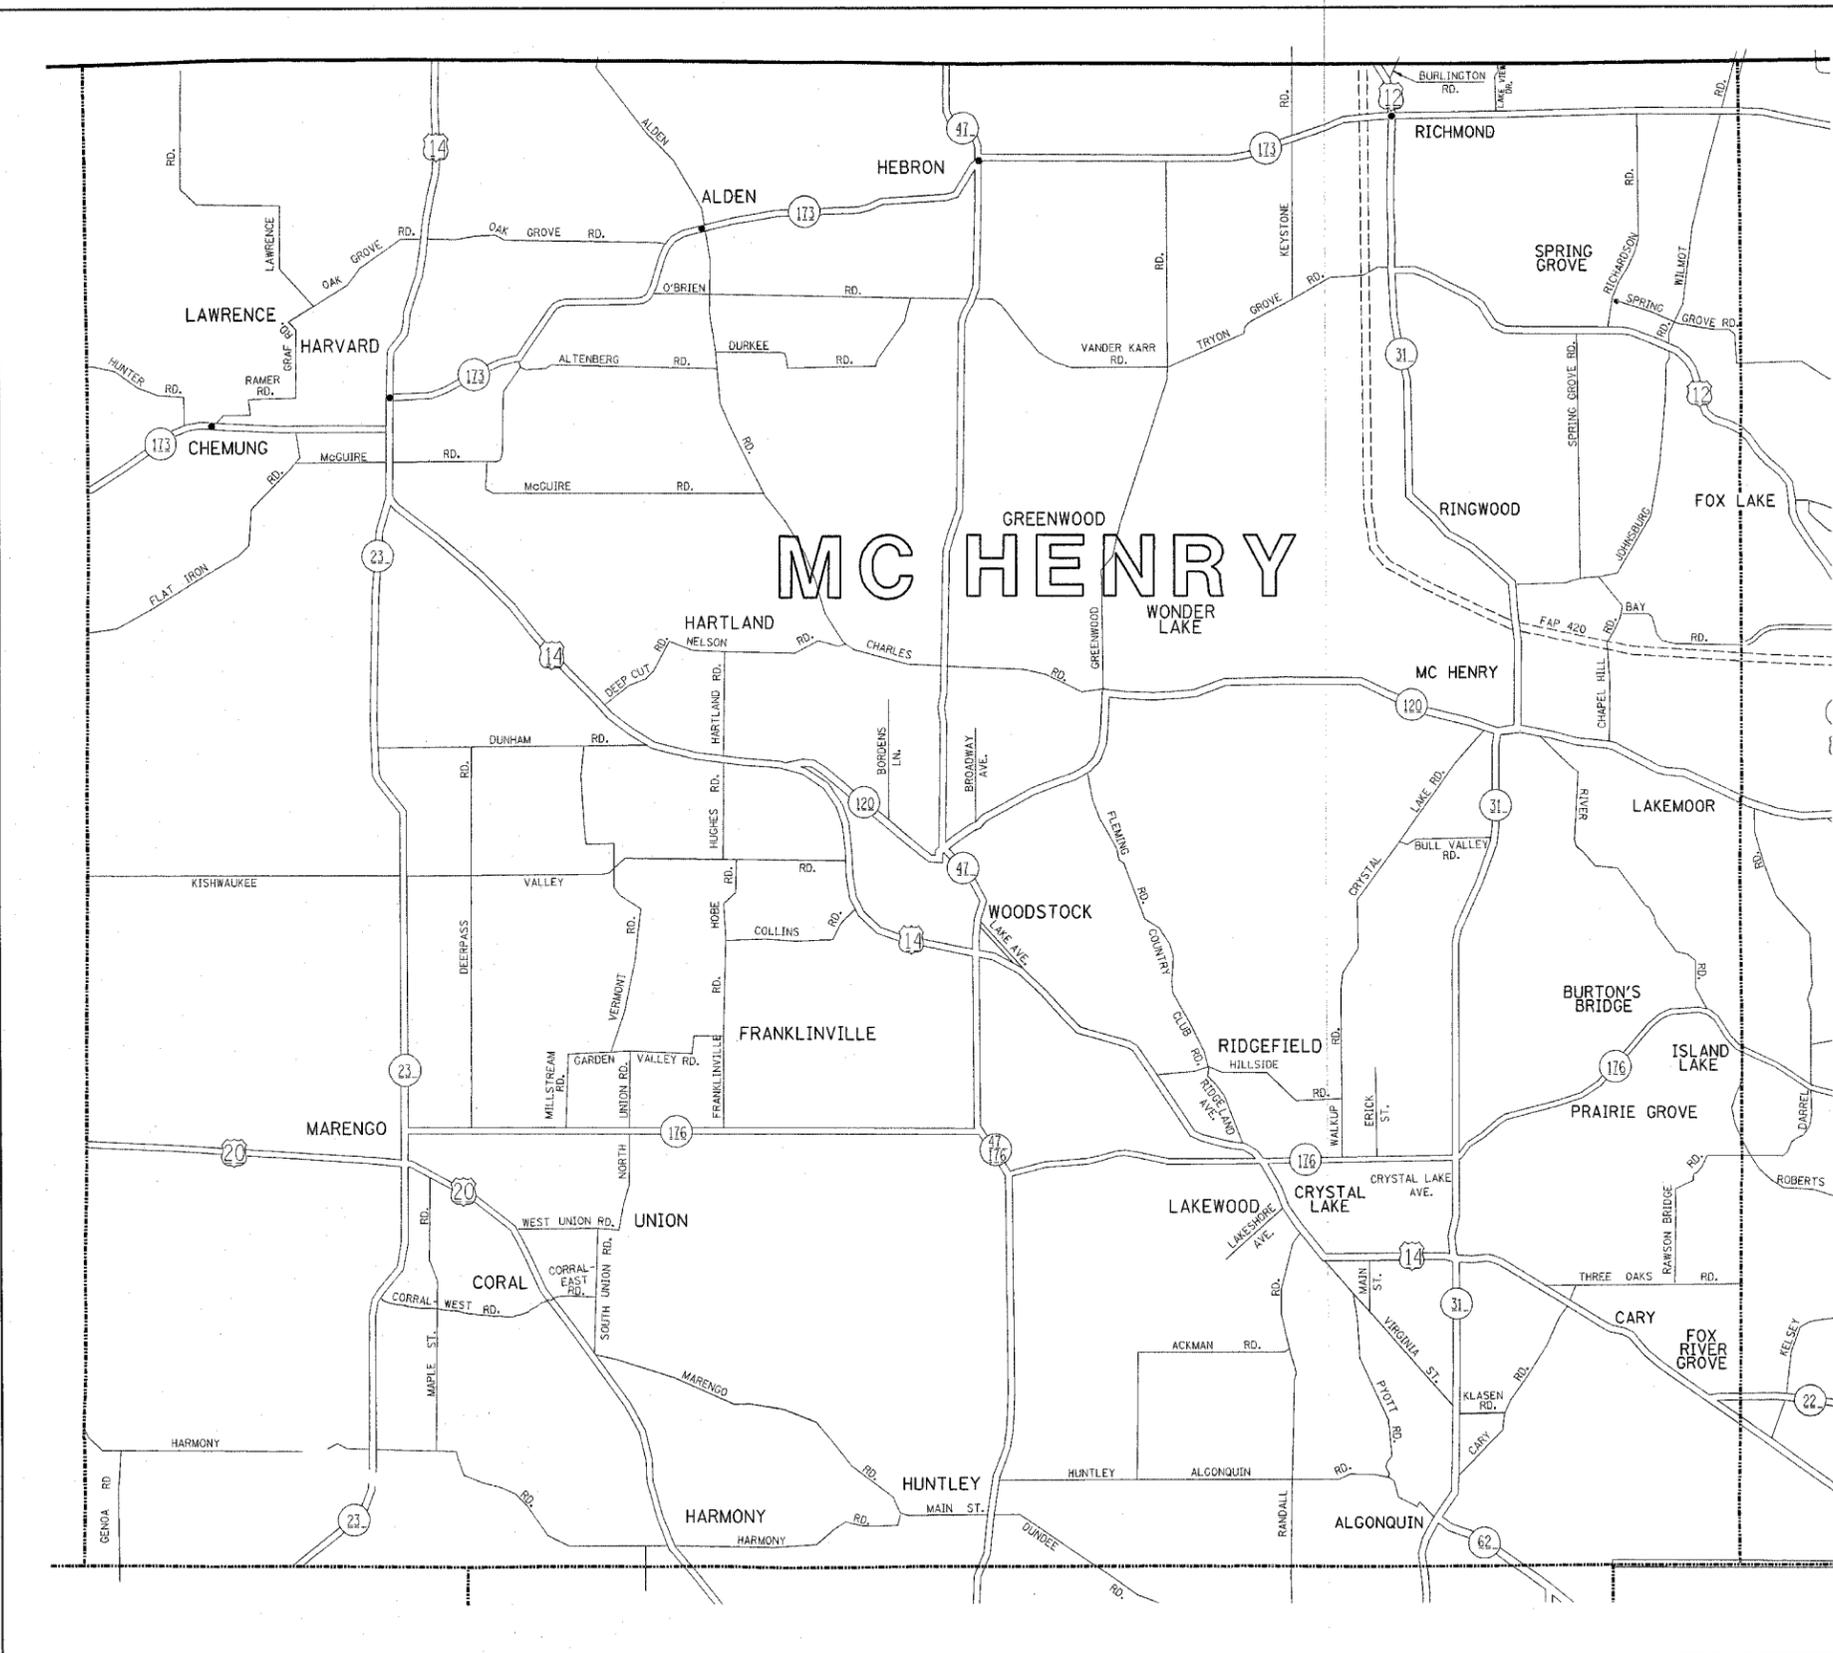

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION  
 NORTHERN PART, DISTRICT 1

**FENCE REPAIR  
 LOCATION MAP  
 MC HENRY COUNTY**


SCALE: 1"=1.5 MILES  
 DATE: 9/28/2006

DRAWN BY: CADD  
 CHECKED BY:

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR.	2006-015 I	VARIOUS	14	9
FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT				


CONTRACT NO. 60B39

**NOTE**  
 \* MAXIMUM POST SPACING SHALL BE 3 m (10') C&C EXCEPT WHERE OTHERWISE SHOWN ON PLANS

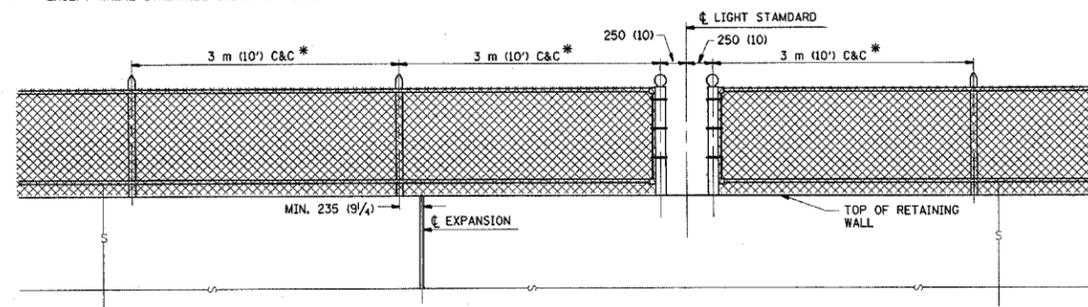

ELEVATION VIEW OF RETAINING WALL WITH PEDESTRIAN BARRIER TYPE III


FOR INFORMATIONAL PURPOSES ONLY

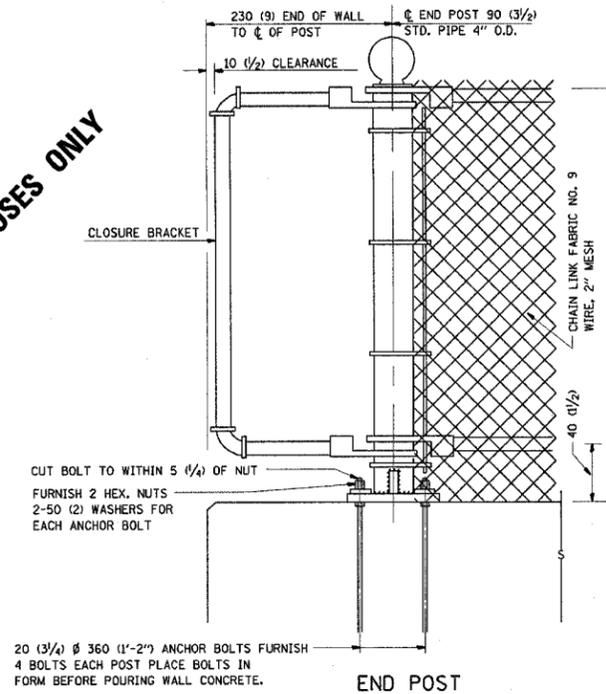


END POST

20 (3/4)  $\phi$  360 (1'-2") ANCHOR BOLTS FURNISH 4 BOLTS EACH POST PLACE BOLTS IN FORM BEFORE POURING WALL CONCRETE.


**NOTE:**  
 THE COST OF FURNISHING ANCHOR BOLTS, NUTS, & WASHERS TO BE INCIDENTAL

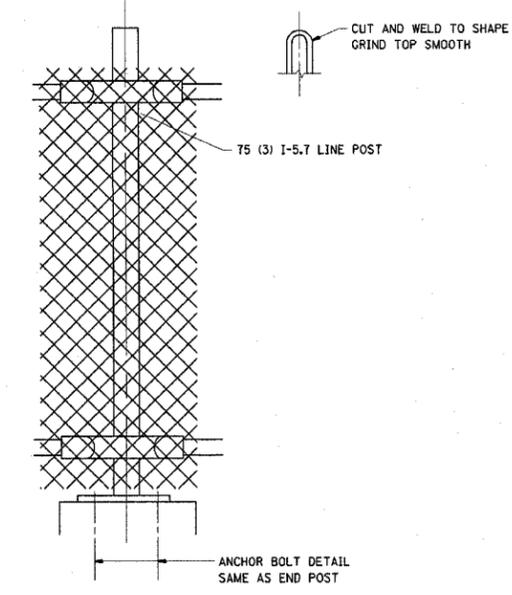


LINE POST

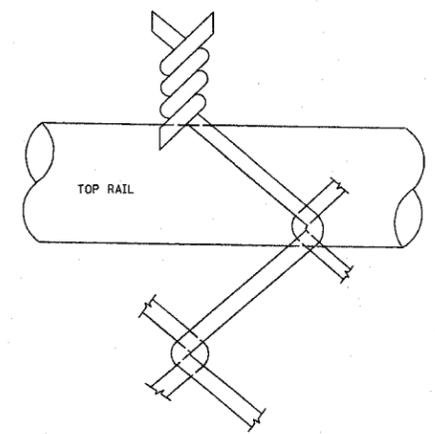

WIRE MESH FABRIC TO BE BARBED AT THE TOP

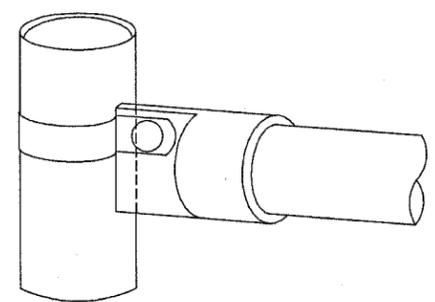


RAIL FITTING AT END POSTS

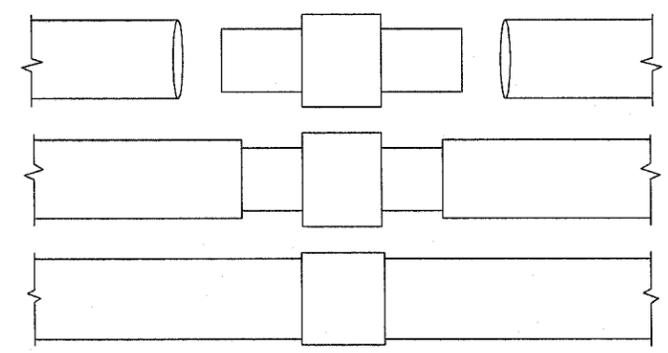


EXPANSION COUPLING DETAIL

**NOTE:**  
 EXP. COUPLING TO APPEAR IN TOP AND BOTTOM RAILS WHERE EVER EXP. JT. APPEARS IN STRUCTURE.

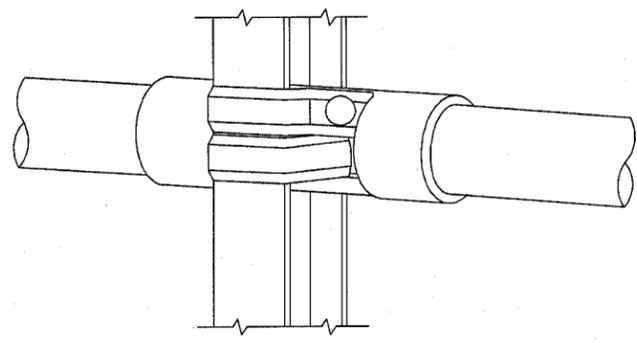


RAIL FITTING ON SECTION LINE POST

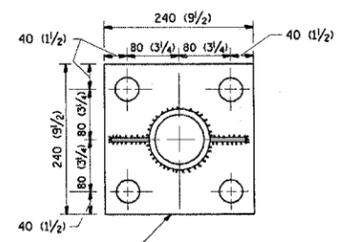

ANCHOR PLATE DETAILS

**NOTE:**  
 POST, PLATE AND GUSSET ASSEMBLY SHALL BE GALVANIZED AFTER ALL CUTTING, DRILLING, WELDING, AND FABRICATION HAVE BEEN COMPLETED. THE GALVANIZED COATING SHALL CONFORM TO THE REQUIREMENTS OF AASHTO M 120. THE GALVANIZED COATING SHALL NOT BE LESS THAN 610 G/50 M (2.0 OZ./50. FT.) OF SURFACE.

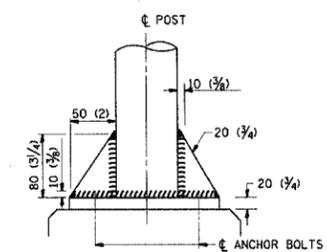

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE SHOWN.

ILLINOIS DEPARTMENT OF TRANSPORTATION


PEDESTRIAN BARRIER TYPE III  
 STD. 10-SS-514 R

SCALE: NONE  
 DATE: 9/28/2006  
 DRAWN BY: C.A.D.D.  
 CHECKED BY:

REVISIONS	
NAME	DATE


F.A. RITE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR.	2006-015 I	VARIOUS	14	10
FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT				

CONTRACT NO. 60B39

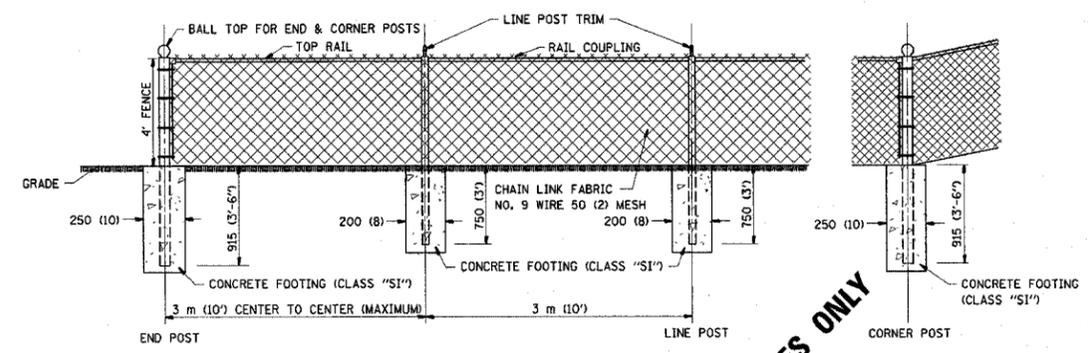


CHAIN LINK FENCE

FOR INFORMATIONAL PURPOSES ONLY

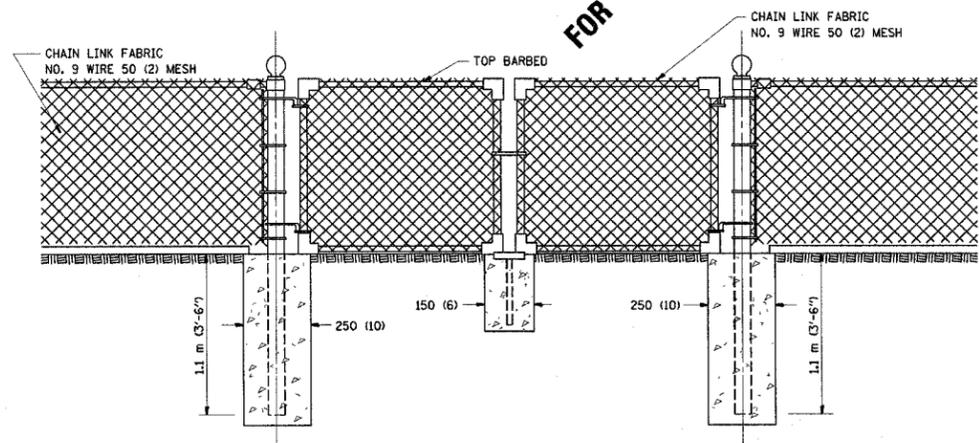

DRIVE GATE 1 m (3'-7") X 3 m (10')

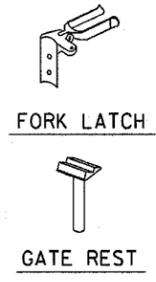

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE SHOWN.

ILLINOIS DEPARTMENT OF TRANSPORTATION

CHAIN LINK FENCE  
10-SS-506 B

SCALE: NONE  
DATE: 9/28/2006  
DRAWN BY: C.A.D.D.  
CHECKED BY:

NOTE:  
THE CHAIN LINK FENCE AS SHOWN HEREIN SHALL BE CONSTRUCTED AT SUCH LOCATIONS AS SHOWN ON PLANS AND IN ACCORDANCE WITH THE SPECIAL PROVISIONS  
  
THE ENGINEER SHALL ESTABLISH ALL NECESSARY LINE AND GRADE PRIOR TO THE ERECTION OF THE FENCE IN CONFORMANCE WITH THE PLANS

REVISIONS	
NAME	DATE



P.L. NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR.	2006-D15 I	VARIOUS	14	11
STA.	TO STA.			
FED. ROAD DIST. NO.	BIDNO	FED. AID PROJECT		

CONTRACT NO. 60B39

GENERAL NOTES:

THIS WORK CONSISTS OF FURNISHING ALL LABOR, MATERIALS, TOOLS AND EQUIPMENT TO REPAIR CHAIN LINK FENCE POST SLEEVE AS SHOWN ON THE PLANS OR AS DIRECTED BY THE ENGINEER, AND IN ACCORDANCE WITH STATE STANDARD 664001.

BASIS OF PAVEMENT: THIS WORK SHALL BE PAID FOR AT THE CONTRACT UNIT PRICE EACH FOR "CHAIN LINK FENCE POST SLEEVE REPAIR" WHICH PRICE SHALL BE PAYMENT IN FULL TO COMPLETE THE WORK AS SPECIFIED HEREIN.

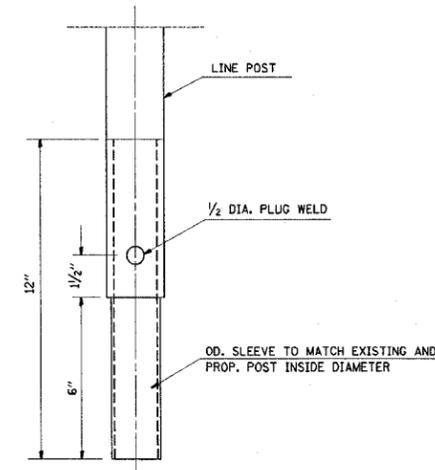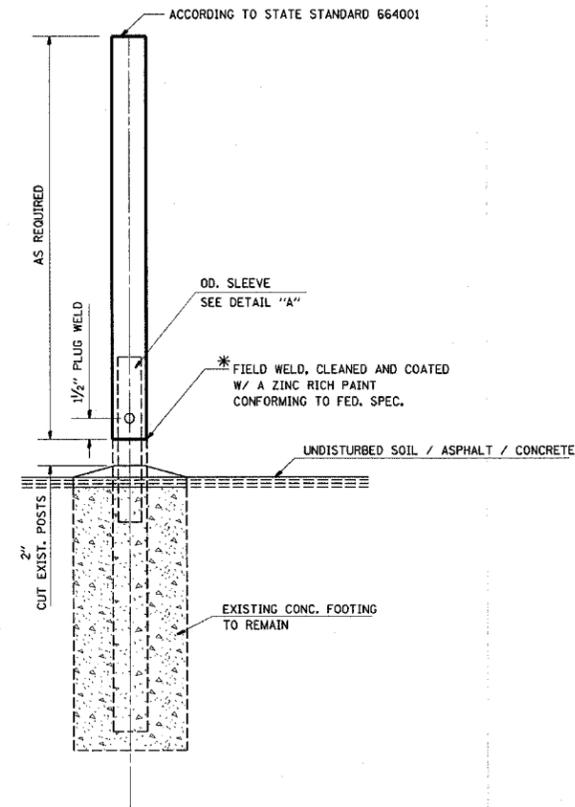

**SLEEVE DET. DWG**  
DETAIL "A"  
SLEEVE DETAIL

\* THIS WORK SHALL BE INCLUDED IN THE COST OF THE PAY ITEM "CHAIN LINK FENCE POST SLEEVE REPAIR"

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

**CHAIN LINK FENCE POST SLEEVE REPAIR DETAIL**

SCALE: NONE  
DATE 9/28/2006

DRAWN BY CADD  
CHECKED BY

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
V&B	2006-015 I	VARIOUS	14	12
FED. ROAD DIST. NO.		ILLINOIS	FED. AID PROJECT	

CONTRACT NO. 60B39


**GENERAL NOTES**

**FENCE RAIL REMOVAL:** THIS ITEM CONSISTS OF REMOVING EXISTING TOP OR BOTTOM RAIL (DAMAGED OR UNDAMAGED) AND REPLACING WITH TENSION WIRE. BOTTOM TENSION WIRE SHALL BE CONSIDERED INCIDENTAL EXCEPT AT LOCATIONS OF EXISTING BOTTOM RAIL REMOVAL.


**TENSION WIRE:** THIS ITEM CONSISTS OF INSTALLING TENSION WIRE, TOP OR BOTTOM, WHERE TOP OR BOTTOM RAIL IS NON-EXISTENT, OR WHERE EXISTING DAMAGED TENSION WIRE IS REMOVED AND REPLACED BY NEW TENSION WIRE.

ALL WORK AND MATERIALS SHALL BE IN ACCORDANCE WITH THE PLANS, SPECIAL PROVISIONS, STANDARD SPECIFICATIONS AND STANDARD 664001.

REPLACEMENT OF OTHER FENCE COMPONENT PARTS SHALL BE MEASURED AND PAID FOR SEPARATELY AS DESCRIBED IN THE SPECIAL PROVISIONS.

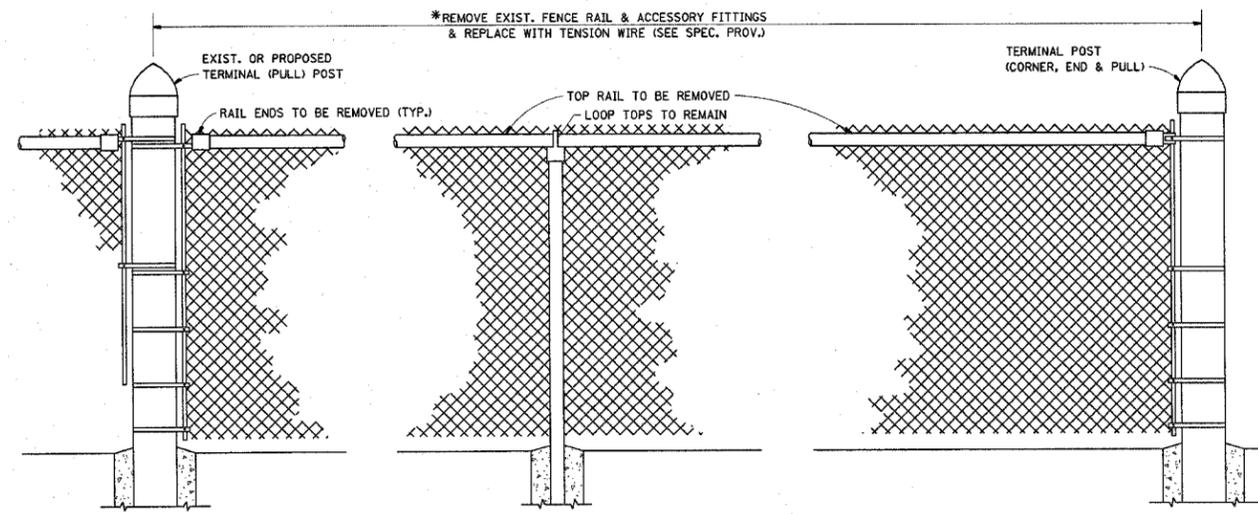


EXIST. CHAIN LINK FENCE WITH TOP RAIL

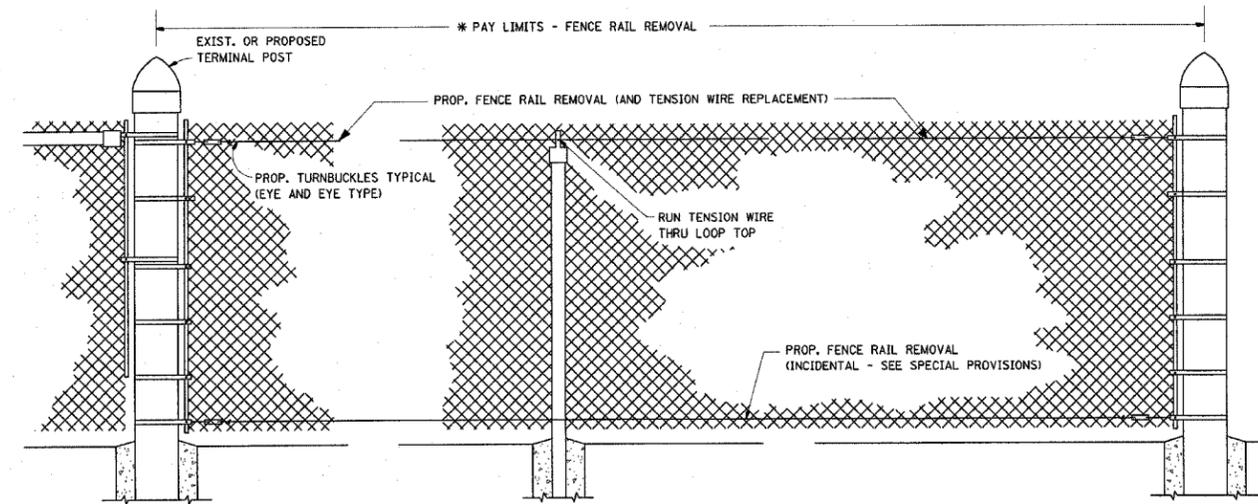


PROP. CHAIN LINK FENCE WITH "FENCE RAIL REMOVAL"

\* THE ENGINEER IN CHARGE SHALL DETERMINE THE LENGTH OF FENCE RAIL TO BE REMOVED & REPLACED WITH "TENSION WIRE"

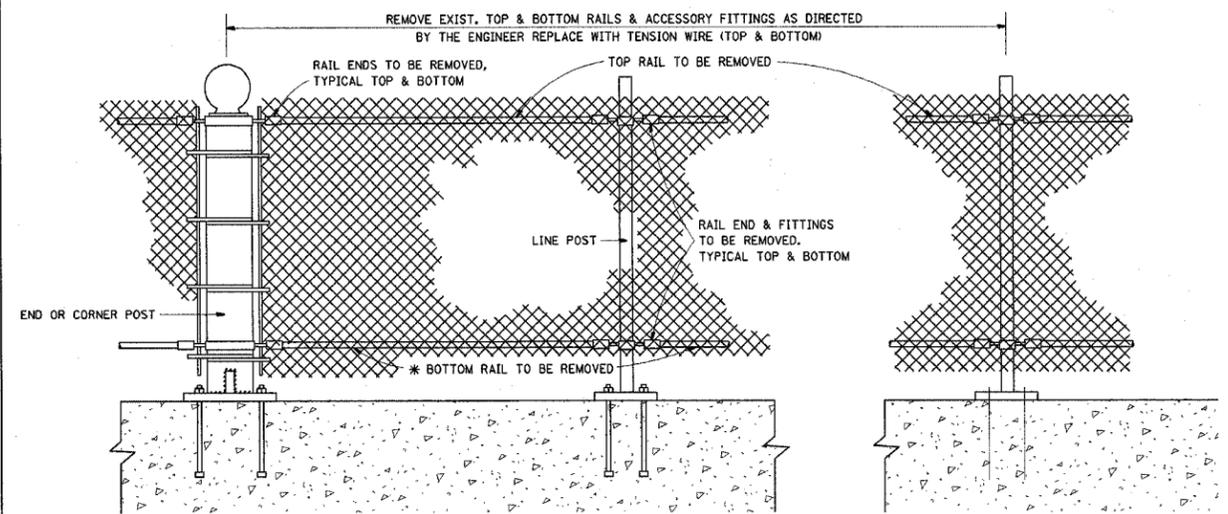

EXIST. PEDESTRIAN BARRIER TYPE 3 WITH TOP AND BOTTOM RAILS

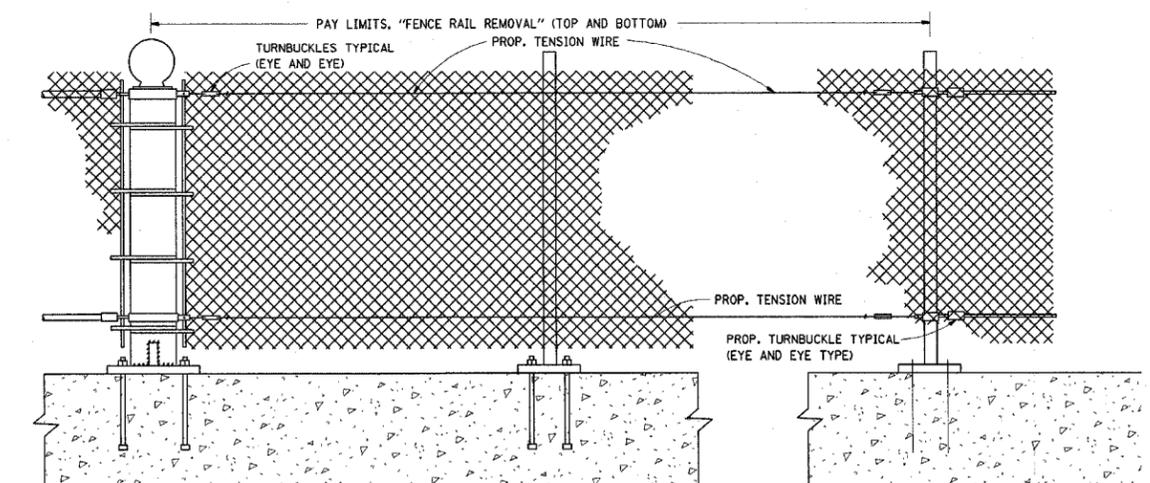

PROP. PEDESTRIAN BARRIER TYPE 3 WITH FENCE RAIL REMOVAL

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE SHOWN.


ILLINOIS DEPARTMENT OF TRANSPORTATION  
**PROPOSED PEDESTRIAN BARRIER AND CHAIN LINK FENCE WITH TENSION WIRE AND FENCE RAIL REMOVAL**

REVISIONS	
NAME	DATE

SCALE: NONE  
 DATE: 9/28/2006  
 DRAWN BY: C.A.D.D.  
 CHECKED BY:

P.A. FILE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR 2006-0133	VAR		14	13
STA.	TO STA.			
FED. ROAD DIST. NO. 7	ILLINOIS	FED. AID PROJECT		


CONTRACT 60B39

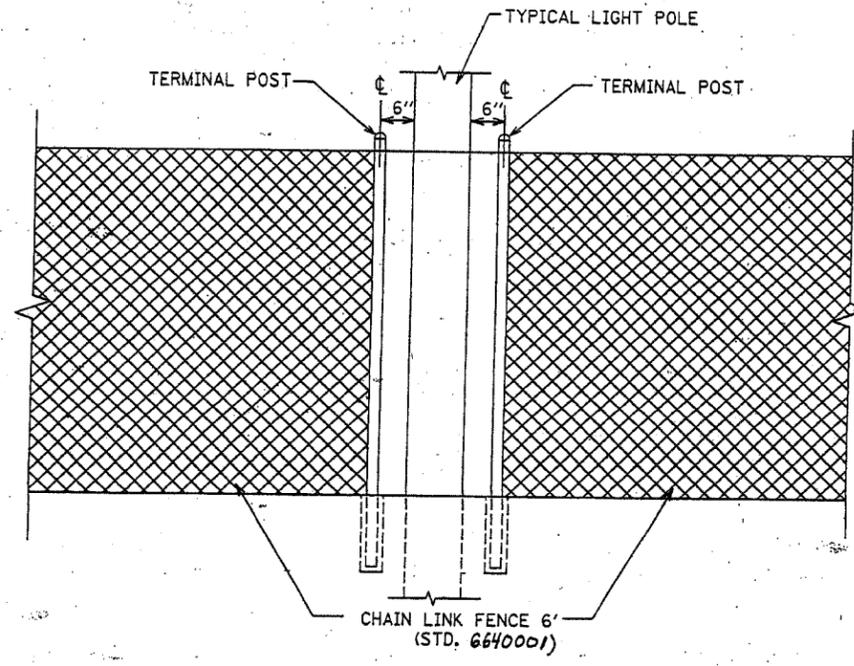

FENCE CONFLICT WITH LIGHT POLE

N.T.S.

GALVANIZED POSTS SHALL CONFORM TO THE REQUIREMENTS OF STANDARD 664001 POSTS UTILIZED IN THE REPAIR WORK SHALL BE THE SAME TYPE SHAPE AS POSTS ADJACENT TO THE REPAIR AREA UNLESS OTHERWISE DIRECTED BY THE ENGINEER. NO USED MATERIALS WILL BE PERMITTED

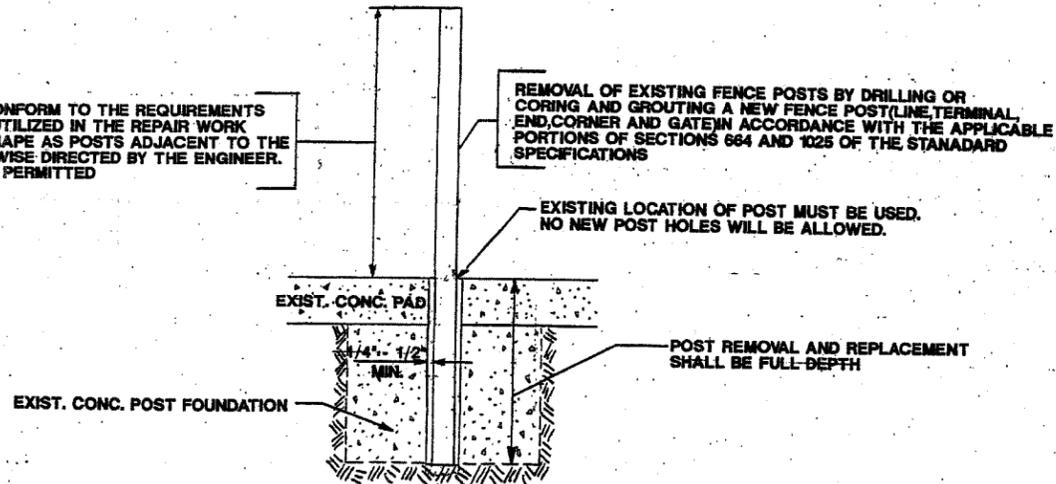

POST REMOVAL AND REPLACEMENT

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

## SPECIAL DETAILS

SCALE: VERT. \_\_\_\_\_  
 HORIZ. \_\_\_\_\_  
 DATE \_\_\_\_\_


DRAWN BY \_\_\_\_\_  
 DESIGNED BY \_\_\_\_\_  
 CHECKED BY \_\_\_\_\_

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
2006-015 I	Various		14	14
STA.	TO STA.			
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		


PARTIAL RAMP CLOSURE DETAILS

SHOULDER CLOSURE DETAILS

REFLECTIVE 150 (6) EDGE LINE ON LOWER SLOPE OF WALL (LEFT EDGE YELLOW, RIGHT EDGE WHITE)

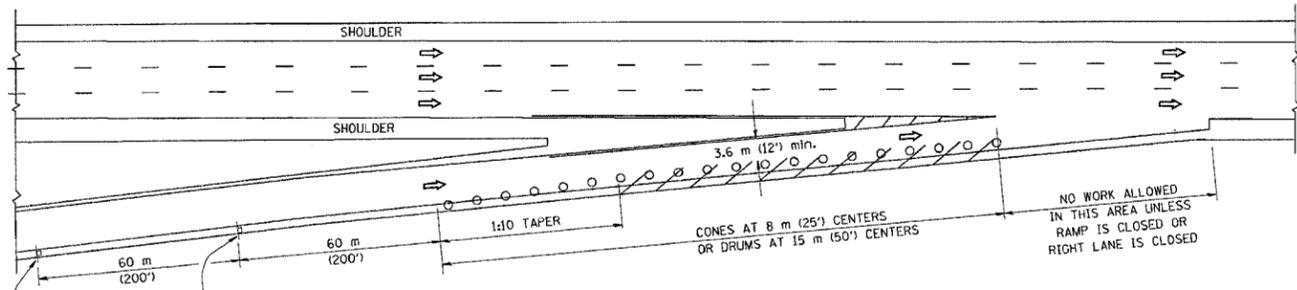


TYPICAL ENTRANCE RAMP

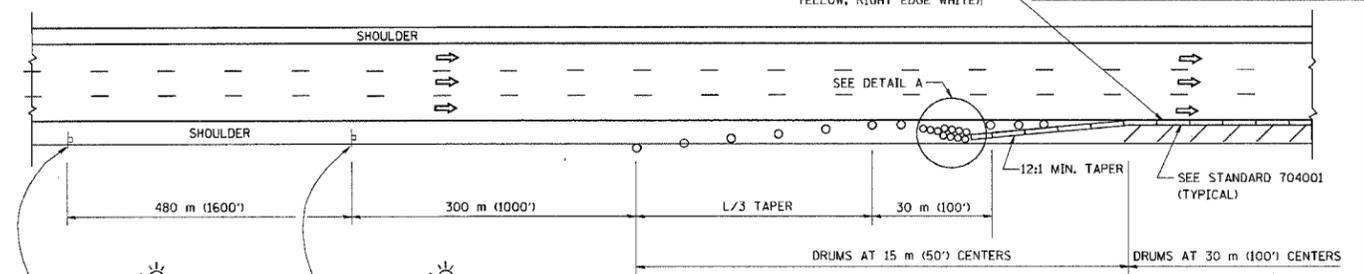


PERMANENT SHOULDER CLOSURE

OR WHEN SPECIFIED INSTALL TEMPORARY CONCRETE BARRIER WALL WITH BARRIER WALL REFLECTORS PER TRAFFIC CONTROL AND PROTECTION (EXPRESSWAYS)

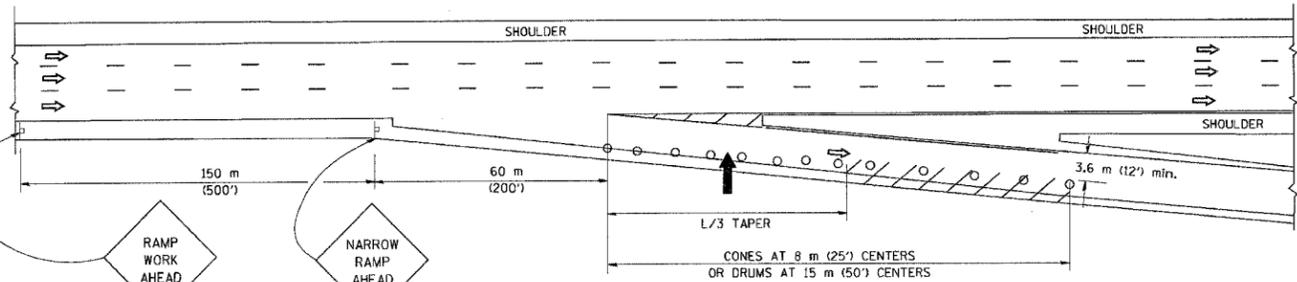


TYPICAL EXIT RAMP

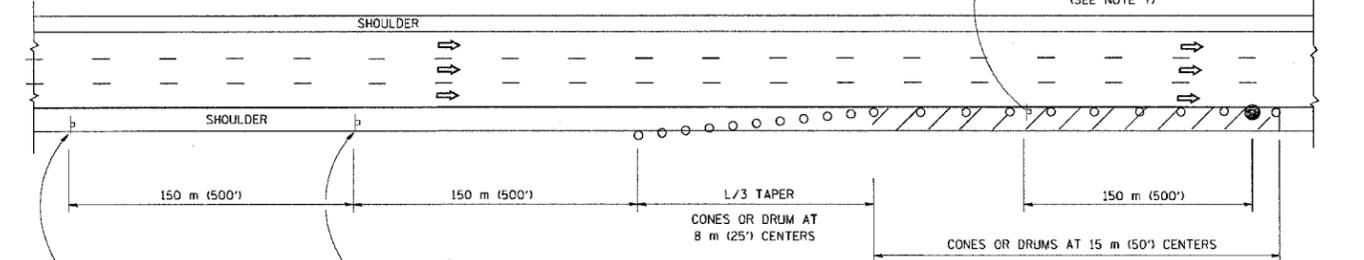


DAYTIME SHOULDER CLOSURE

THIS DETAIL IS USED WHERE:  
1. VEHICLES, EQUIPMENT, WORKERS OR THEIR ACTIVITIES ENCR OACH IN AN AREA CLOSER THAN 4.5 m (15') TO THE EDGE OF PAVEMENT FOR A PERIOD IN EXCESS OF 15 MINUTES.

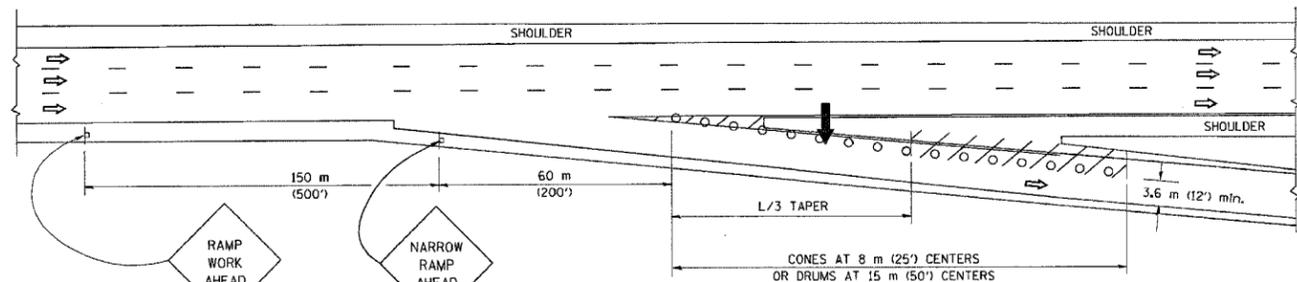

TYPICAL EXIT RAMP

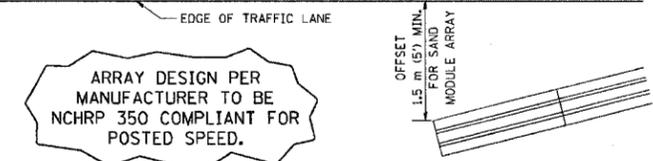

DETAIL "A"  
IMPACT ATTENUATOR, TEMPORARY  
(SEE NOTE 5)

SYMBOLS

- ARROWBOARD
- WORK AREA
- SIGN ON PORTABLE OR PERMANENT SUPPORT
- FLAGGER WITH CONTROL SIGN
- DRUM WITH MONO-DIRECTIONAL STEADY BURNING LIGHT
- CONES - 700 (28) IN HEIGHT

GENERAL NOTES

1. THE "L" DISTANCE EQUALS:  
SPEED LIMIT FORMULAS  
80 Km/h (45 mph) METRIC ENGLISH  
OR GREATER:  $L=0.65(W)(S)$   $L=(W)(S)$   
W = WIDTH OF OFFSET IN METERS (FEET)  
S = NORMAL POSTED SPEED KM/H (MPH)
2. PLASTIC DRUMS WITH HIGH PERFORMANCE REFLECTIVE SHEETING AND STEADY BURNING LIGHTS ARE REQUIRED FOR ALL NIGHTIME CLOSURES.
3. ALL SIGNS SHALL BE POST MOUNTED IF THE CLOSURE TIME EXCEEDS FOUR DAYS.
4. FLASHING LIGHTS SHALL BE USED DURING THE HOURS OF DARKNESS AND SHALL BE INSTALLED ABOVE THE FIRST TWO SETS OF SIGNS.

5. THE IMPACT ATTENUATOR, TEMPORARY IS NOT REQUIRED WHEN THE TEMPORARY CONCRETE BARRIER WALL IS PROTECTED BY OR IS TIED INTO THE EXISTING GUARDRAIL. IF OFFSET IS LESS THAN 5 FEET USE "TRAFFIC BARRIER TERMINAL, TYPE III, TEMPORARY" DEVICE TO MEET NCHRP350 FOR POSTED SPEED.
6. AUTHORIZATION FROM THE DISTRICT'S BUREAU OF TRAFFIC IS REQUIRED FOR ALL FREEWAY CLOSURES.
7. THE FLAGGER AND FLAGGER SIGN ARE REQUIRED AT THE ABOVE WORK SITES WHEN:
  - a. FOUR OR MORE WORK VEHICLES ENTER THE TRAFFIC LANES IN A ONE HOUR PERIOD.
  - b. THE WORK ACTIVITY REQUIRES FREQUENT ENCROACHMENT INTO THE LANE OPEN TO TRAFFIC.
 THE FLAGGER SHALL BE STATIONED APPROXIMATELY 30 m (100') TO 60 m (200') IN ADVANCE OF THE WORKERS.

REVISIONS	
NAME	DATE
DWS	11/96
JAF	12/02
NCHRP 350	04/03
JAF	2/06

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE SHOWN.

ILLINOIS DEPARTMENT OF TRANSPORTATION  
TRAFFIC CONTROL DETAILS  
FOR FREEWAY  
SHOULDER CLOSURES  
PARTIAL RAMP CLOSURES

SCALE: NONE  
DATE: 3/1/2006

DESIGNED BY: DWS  
DRAWN BY  
CHECKED BY  
TC-17

REVISION DATE: 02/28/06