


PAVEMENT PATCHING									
LOCATION STATION	LENGTH FT	WIDTH FT	AREA SQ YD	6 inches				PARTIAL DEPTH 2 inches	
				TYPE I	TYPE II	TYPE III	TYPE IV	REM / SQ YD	REPL / TONS
BALDWIN RD.									
0.41 SBL	10.00	11.00	12.22		12.22				
0.41 NBL	20.00	11.00	24.44			24.44			
0.62 SBL	40.00	5.00	22.22					22.22	2.49
1.23 NBL	6.00	6.00	4.00					4.00	0.45
3.15 SBL	10.00	11.00	12.22					12.22	1.37
3.23 SBL	15.00	11.00	18.33					18.33	2.05
3.24 SBL	8.00	4.00	3.56					3.56	0.40
3.28 SBL	10.00	11.00	12.22					12.22	1.37
3.33 SBL	8.00	11.00	9.78					9.78	1.10
3.33 NBL	15.00	11.00	18.33					18.33	2.05
3.35 SBL	12.00	11.00	14.67					14.67	1.64
3.40 SBL	20.00	11.00	24.44					24.44	2.74
3.48 SBL	15.00	6.00	10.00					10.00	1.12
3.60 SBL	12.00	11.00	14.67					14.67	1.64
3.62 SBL	10.00	11.00	12.22					12.22	1.37
3.75 SBL	6.00	11.00	7.33					7.33	0.80
3.79 SBL	10.00	11.00	12.22					12.22	1.37
3.82 SBL	6.00	11.00	7.33					7.33	0.82
3.85 SBL	6.00	15.00	10.00					10.00	1.12
3.88 SBL	8.00	11.00	9.78					9.78	1.10
3.90 SBL	6.00	15.00	10.00					10.00	1.12
3.96 NBL	20.00	11.00	24.44					24.44	2.74
3.98 SBL	6.00	10.00	6.67					6.67	0.75
4.06 NBL	25.00	11.00	30.56				30.56		
4.18 SBL	6.00	15.00	10.00					10.00	1.12
4.24 SBL	6.00	11.00	7.33					7.33	0.82
4.30 SBL	12.00	11.00	14.67					14.67	1.64
4.39 SBL	25.00	6.00	16.67					16.67	1.87
4.48 SBL	25.00	11.00	30.56					30.56	3.42
5.07 SBL	15.00	11.00	18.33					18.33	2.05
5.08 SBL	15.00	11.00	18.33					18.33	2.05
5.15 SBL	15.00	11.00	18.33					18.33	2.05
5.18 SBL	20.00	11.00	24.44					24.44	2.74
5.32 SBL	15.00	11.00	18.33					18.33	2.05
5.32 NBL	15.00	11.00	18.33					18.33	2.05
5.51 NBL	6.00	11.00	7.33					7.33	0.82
5.53 SBL	6.00	11.00	7.33					7.33	0.82
5.64 SBL	15.00	11.00	18.33					18.33	2.05
5.70 SBL	10.00	6.00	6.67					6.67	0.75
5.80 SBL	6.00	11.00	7.33					7.33	0.82
5.87 SBL	15.00	6.00	10.00					10.00	1.12
6.04 SBL	6.00	11.00	7.33					7.33	0.82
6.16 NBL	20.00	11.00	24.44					24.44	2.74
6.65 SBL	15.00	6.00	10.00					10.00	1.12
6.74 SBL	30.00	6.00	20.00					20.00	2.24
SCHULINE RD.									
5.15 EBL	10.00	11.00	12.22					12.22	1.37
7.48 EBL	30.00	6.00	20.00					20.00	2.24
SUB-TOTAL			678.00	0.00	12.22	24.44	30.56	610.73	68.38
ANTICIPATED FAILURES (20%)				0.00	2.44	4.89	6.11	122.15	13.68
TOTAL				0.00	14.67	29.33	36.67	732.87	82.06

LOCATION	EARTH EXCAVATION	EARTH EXCAVATION ADJUSTED FOR SHRINKAGE	EMBANKMENT	EARTHWORK BALANCE WASTE(+) OR SHORTAGE(-)
STA. 714+50 TO 718+00	26	19.5	838	-588
STA 720+00 TO 722+00	20	15	593	-578
TOTAL	46	34.5	1431	-1166

PAVEMENT MARKING SCHEDULE					
STATION		PAVEMENT		BRIDGE	
		WHITE LINE 4"	YELLOW SKIP DASH LINE 4"	WHITE LINE 4"	YELLOW SKIP DASH LINE 4"
720+06.5	TO 723+45.7	¢	85		
717+73.5	TO 718+13.5	RT/LT	80		
717+73.5	TO 718+13.5	¢	10		
718+13.5	TO 719+66.5	RT/LT		306	
718+13.5	TO 719+66.5	¢			40
719+66.5	TO 720+06.5	RT/LT	80		
719+66.5	TO 720+06.5	¢	10		
715+58.9	TO 717+73.5	¢		56	
SUB TOTALS			160	161	306
TOTAL			321		346


RESURFACING SCHEDULE					
STATION		BITUMINOUS CONCRETE SURFACE COURSE SUPERPAVE MIX "C", N70		BITUMINOUS MATERIALS (PRIME COAT)	BITUMINOUS SHOULDER SUPERPAVE
		TON	TON	TON	TON
717+73.5	TO 718+13.5	9.71		0.4	113.3
718+13.5	TO 719+66.5	86.4			
719+66.5	TO 720+06.5	9.71		0.4	113.3
TOTALS		105.8		0.8	226.6

TEMPORARY PAVEMENT MARKING					
STATION		PAVEMENT TEMPORARY MARKING LINE 6"		BRIDGE TEMPORARY MARKING LINE 6"	PAVEMENT MARKING REMOVAL
		FOOT	FOOT	FOOT	SQUARE FOOT
715+58.9	TO 717+73.5	¢			65.5
715+58.9	TO 723+45.7	¢	357	153	-51
719+51.5	TO 720+28.5	WALL			524
715+58.9	TO 723+45.8	¢	357	153	
717+51.5	TO 720+28.4	WALL			
720+06.5	TO 723+45.7	¢			
SUB-TOTAL			714	306	538.5
TOTAL				1020	539

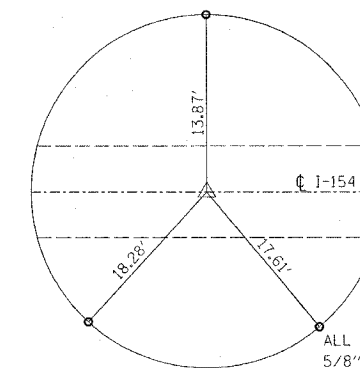

713+00.00
SET 5/8" I.P.


ALL THREE TIES ARE 5/8" I.P. SET FLUSH AND ±0.5" FROM E.P.

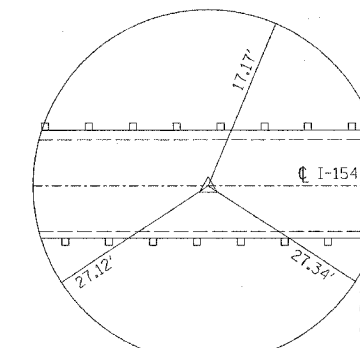

718+90
SET MAG NAIL

ALL THREE TIES ARE CHISELED "X" IN GUARDRAIL BOLTS

SET MAG NAIL & B.C. IN 24" DEAD TREE

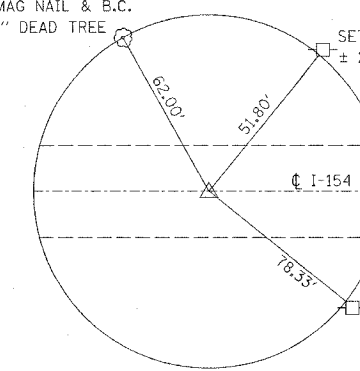

725+00
SET 5/8" I.P.

SET MAG NAIL & B.C. ± 2' HIGH IN P.P.

SET MAG NAIL & B.C. ±6' HIGH IN P.P.

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
TIE POINTS AND SCHEDULE
FAP ROUTE 329 (IL 154)
SECTION 126BR-1
RANDOLPH COUNTY

SCALE: VERT.
HORIZ.
DATE

DRAWN BY
CHECKED BY