

SHEET NO. S49 ROUTE NO. SECTION SHEETS FAU 1441 00-00059-00-BR KANE 154


120 of S52 SHEETS

Contract # 83869

APPROACH PAVEMENT BILL OF MATERIAL

1	ITEM	UNIT	TOTAL
1	Bridge Approach Pavement (Special)	Sq. Yd.	342

PLAN - EAST APPROACH SLAB

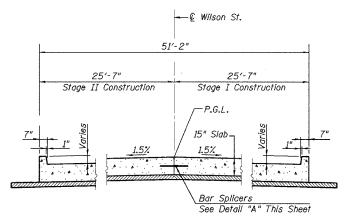

PLAN - WEST APPROACH SLAB

TYPICAL SECTION THRU APPROACH PAVEMENT (Looking East)

— € Wilson St. Stage II Construction Stage I Construction - ^lg" x 1^l2" Sawed Groove (Along Longitudinal Const, Joint) Seal with Poured Joint Sealer Threaded or Coil Rods (E) -Threaded or Coil Rods (E) └─Threaded or Coil Loop Splicers (E)

> DETAIL "A" (Looking East)

with IDOT Highway Standard 420401 except as modified herein.

deck section.

NOTES

3. Reinforcement bars designated (E) shall be epoxy coated.

1. Transition curb height from roadway section to bridge

2. The bridge approach slabs shall be in accordance

4. Reinforcement bars on this sheet are incidental

to the Pay Item - Bridge Approach Pavement (Special). 5. Contractor may shift construction joint to suit construction

staging open approval at the Engineer.

BRIDGE APPROACH PAVEMENT WILSON ST OVER FOX RIVER SECTION 00-00059-00-BR KANE COUNTY STRUCTURE NO. 045-6051

DESIGNED - DWH CHECKED - CMM CHECKED -CMM

LOCHNER