

CODE NO.	ITEM	UNIT	TOTAL QUANTITY	CONSTRUCTION TYPE CODE									
				ROADWAY	SAFETY	BRIDGE, NEW CONSTRUCTION (S.N. 045-3048)	SPECIAL BRIDGE (S.N. 045-5574)	SPECIAL BRIDGE (S.N. 045-0112)	SPECIAL BRIDGE (STA 2172+50.15)	SPECIAL BRIDGE (S.N. 045-5573)	SPECIAL BRIDGE (STA 60+28.79)	SPECIAL BRIDGE (RETAINING WALLS)	
				0001	0021	0008	0040	0040	0040	0040	0040	0040	0044
50901750	PARAPET RAILING	FOOT	362			362							
50901760	PIPE HANDRAIL	FOOT	165	165									
51200959	FURNISHING METAL SHELL PILES 14" X 0.312"	FOOT	3,160			3,160							
51202305	DRIVING PILES	FOOT	3,160			3,160							
51203200	TEST PILE METAL SHELLS	EACH	2			2							
51500100	NAME PLATES	EACH	4			1	1	1			1		
52100010	ELASTOMERIC BEARING ASSEMBLY, TYPE I	EACH	10			10							
52100400	STEEL BEARING ASSEMBLY	EACH	10			10							
52100540	ANCHOR BOLTS, 1 1/2"	EACH	40			40							
52200010	TEMPORARY SHEET PILING	SO FT	2,400					2,400					
52200020	TEMPORARY SOIL RETENTION SYSTEM	SO FT	168					168					
52200105	FURNISHING SOLDIER PILES (W SECTION)	FOOT	4,059										4,059
52200200	DRILLING AND SETTING SOLDIER PILES (IN SOIL)	CU FT	23,942										23,942
52200250	UNTREATED TIMBER LAGGING	SO FT	8,924										8,924

• SPECIALITY ITEMS

FILE NAME = W:\94-010 KDOT LMP Section B\CADD SHEETS\Section B2\20131894_SHT_500.dgn




USER NAME = MBrierton	DESIGNED - GJE	REVISED - ADD #1 11/7/2017
PLOT SCALE = 40.0000' / in.	DRAWN - GJE	REVISED -
PLOT DATE = 11/7/2017	CHECKED - DBB	REVISED -
	DATE - 08/07/2017	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION


LONGMEADOW PARKWAY
SUMMARY OF QUANTITIES

SHEET 10 OF 611 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
2298	16-00215-11-PV	KANE	611	10
CONTRACT NO. 61E05			ILLINOIS FED. AID PROJECT	

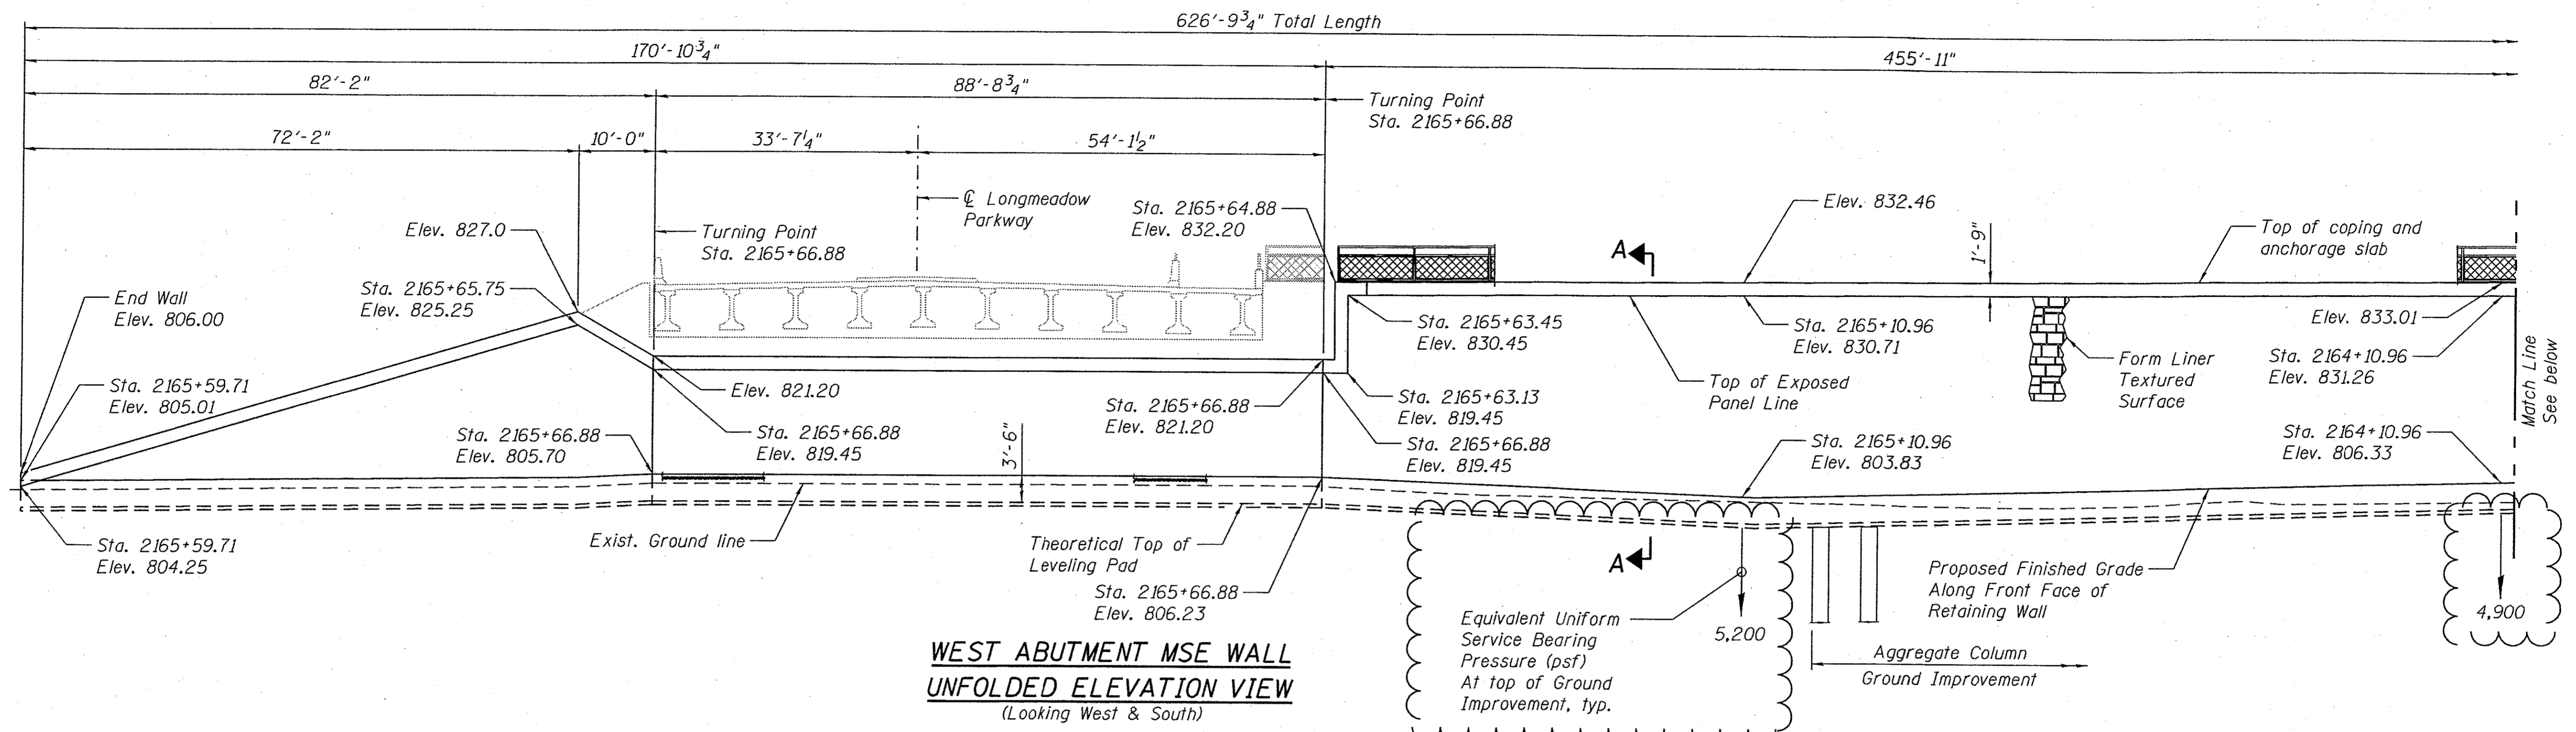

**WEST ABUTMENT MSE WALL
UNFOLDED ELEVATION VIEW**
(Looking West & South)

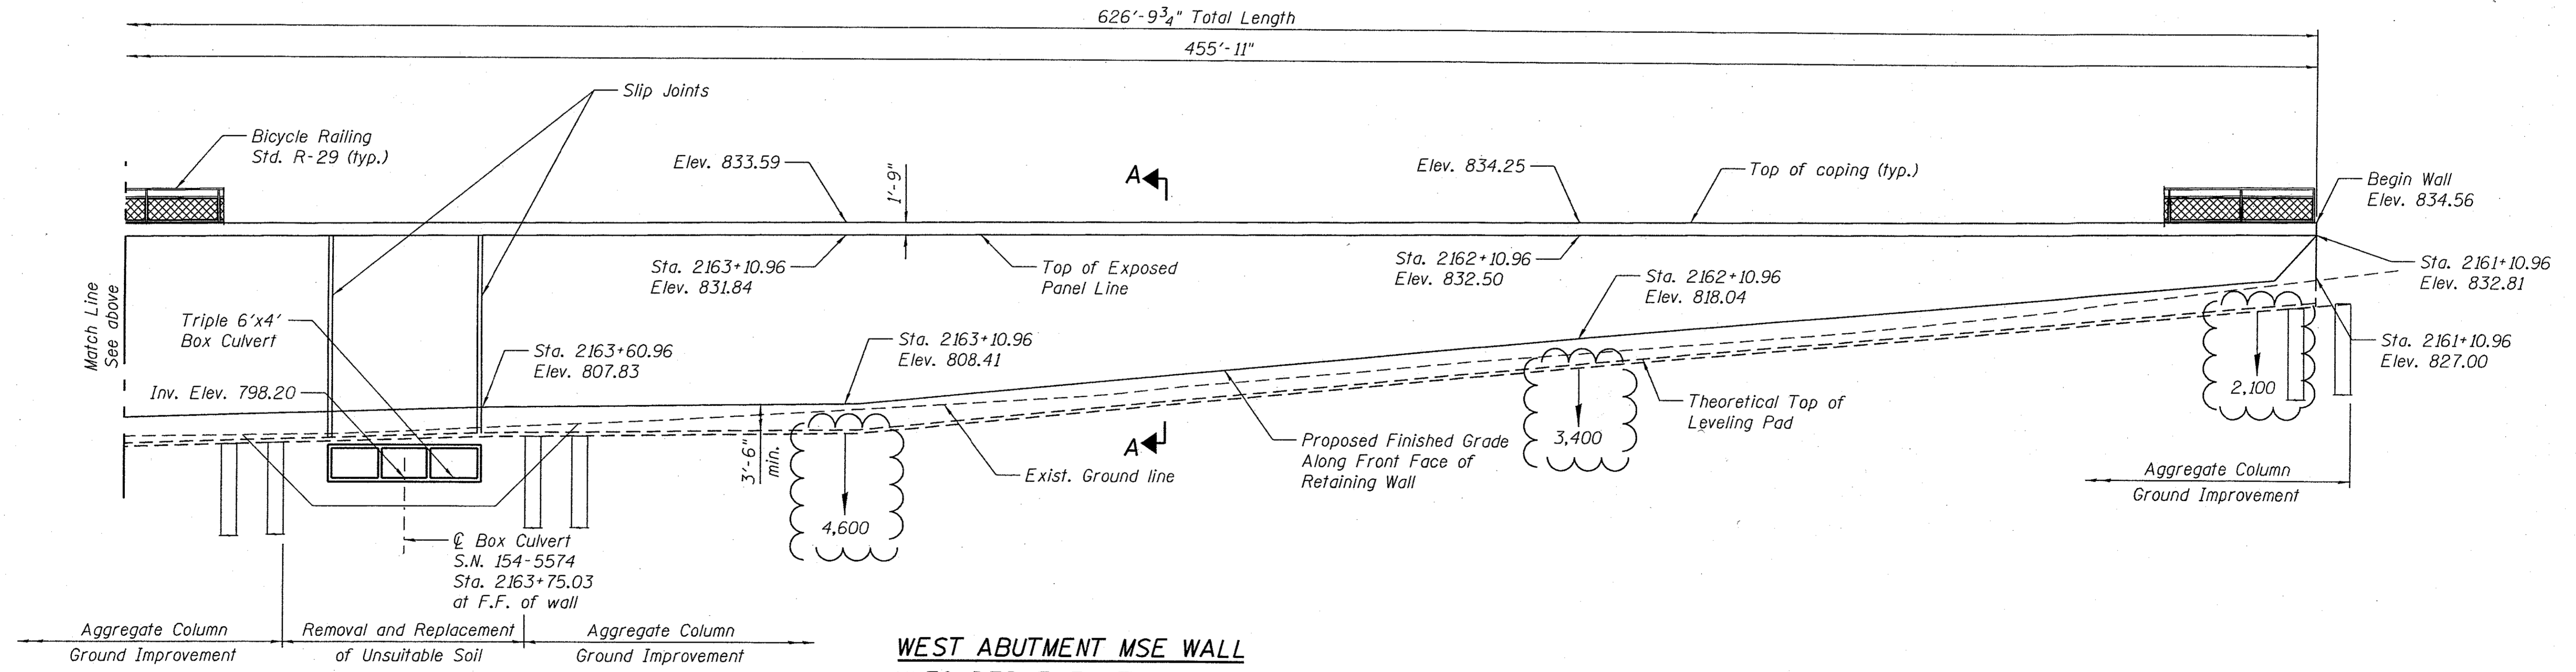

**WEST ABUTMENT MSE WALL
UNFOLDED ELEVATION VIEW**
(Looking South)

- Notes:
1. Wall Stations and Offsets are given to the Front Face (FF) of the wall and are measured from centerline of Longmeadow Pkwy.
 2. Wall is built in conjunction with new bridge S.N. 045-3048.
 3. Horizontal dimensions measured along front face of precast panels.
 4. For Section A-A see Sheet 33 of 49.

FILE NAME = W:\04-010 0001 LMP Section B\CADD SHEETS\Structure\Section B2\LMP over IL31 Bridge\wxe-SHT-32 W Abut MSE Wall Elev.dgn



Bollinger, Lach & Associates, Inc.
ITASCA, ILLINOIS

USER NAME =	DESIGNED - JJI	REVISED - ADD #1 11/7/2017
PLOT SCALE =	CHECKED - NS	REVISED
PLOT DATE = 11/7/2017	DRAWN - GM	REVISED
	CHECKED - NS	REVISED

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**WEST ABUTMENT MSE WALL ELEVATION
STRUCTURE NO. 045-3048**

SHEET NO. 32 OF 49 SHEETS

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
2298	16-00215-11-PV	KANE	611	400
CONTRACT NO. 61E05				
ILLINOIS FED. AID PROJECT				