

PAY ITEM NUMBER	PAY ITEM NAME	QUANTITY	REMARKS
21101625	TOPSOIL FURNISH AND PLACE, 6"	2,952 SQUARE YARDS	FOR SEEDING AREAS, EXCEPT WHERE SOIL WILL NOT BE DISTURBED (SEE PLANS)
21101645	TOPSOIL FURNISH AND PLACE, 12"	46 SQUARE YARDS	FOR VINE PLANTING AREAS
25000210	SEEDING, CLASS 2A	0.95 ACRES	SEE PLANS FOR EXTENTS
25000400	NITROGEN FERTILIZER NUTRIENT	91 POUNDS	FOR SEEDING AREAS, AND IN AREA NORTHWEST OF S-W RAMP (SEE SHEET 51)
25000500	PHOSPHORUS FERTILIZER NUTRIENT	91 POUNDS	FOR SEEDING AREAS, AND IN AREA NORTHWEST OF S-W RAMP (SEE SHEET 51)
25000600	POTASSIUM FERTILIZER NUTRIENT	91 POUNDS	FOR SEEDING AREAS, AND IN AREA NORTHWEST OF S-W RAMP (SEE SHEET 51)
25100125	MULCH, METHOD 3	0.95 ACRES	FOR SEEDING AREAS
A2004716	TREE, GLEDITSIA TRIACANTHOS INERMIS SHADEMASTER (SHADEMASTER THORNLESS COMMON HONEYLOCUST), 2" CALIPER, BALLED AND BURLAPPED	I EACH	SINGLE STRAIGHT TRUNK, SPECIMEN QUALITY
E20220Q1	VINE, PARTHENOCISSUS QUINQUEFOLIA ENGELMANNII (ENGELMANNII VIRGINIA CREEPER), I-GALLON POT	125 EACH	2'-0" ON CENTER
K0029632	WEED CONTROL, NON-SELECTIVE AND NON-RESIDUAL	0.1 GALLONS	FOR AREA NORTHWEST OF S-W RAMP (SEE SHEET 51)
K0029634	WEED CONTROL, PRE-EMERGENT GRANULAR HERBICIDE	0.95 POUNDS	FOR VINE AND TREE PLANTING AREAS, TO REPLACE WEED BARRIER FABRIC PER SPECIAL PROVISION AMMENDING ARTICLE 253.11
K0036120	MULCH PLACEMENT, 4"	477 SQUARE YARDS	FOR VINE AND TREE PLANTING AREAS, AND IN AREA NORTHWEST OF S-W RAMP (SEE SHEET 51)

## LANDSCAPING SCHEDULE

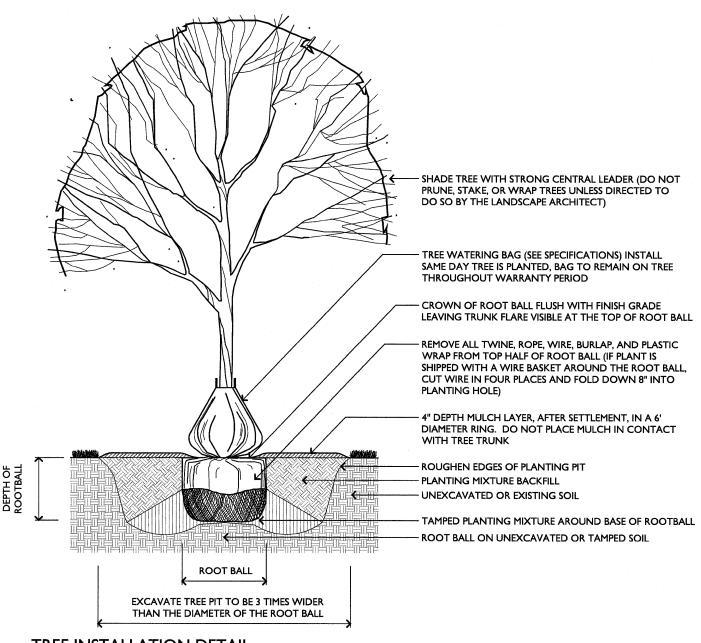

VINE PLANTING IN SOIL MOUND EXISTING WEEP HOLE

1. SOIL MOUNDS TO BE PLACED BETWEEN EXISTING RETAINING WALL JOINTS AND EXISTING RETAINING WALL WEEP HOLES.

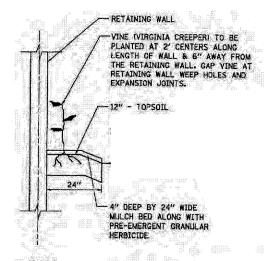

- 1. SEE LANDSCAPE PLANS FOR SPECIFIC LOCATIONS OF VINES.
- 2. MULCH BED SHALL BE PLACED AS SHOWN IN VINE PLANTING DETAIL AND ACCORDING TO IDOT STANDARD SPECIFICATION 253.11 EXCEPT THAT NO WEED BARRIER FABRIC IS REQUIRED. COST OF MULCH COVER IS INCLUDEDWITHPAYMENT FOR VINE -
- 3. PRE-EMERGENT GRANULAR HERBICIDE SHALL BE PLACED IN MULCHED BEDS ACCORDING TO THE SPECIAL PROVISION.
- 4. PRIOR TO BACKFILL OPERATION CALL THE ROADSIDE DEVELOPMENT UNIT AT 847.705.4171.

## TREE INSTALLATION DETAIL SCALE: 1/2" = 1'-0"

3 VINE PLANTING DETAIL - ELEVATION NOT TO SCALE

4 VINE PLANTING DETAIL - SECTION NOT TO SCALE

FILE NAME =	USER NAME = PBLANDING	DESIGNED TW	REVISED -				F.A.U. SECTION	N COUNTY TOTAL SHEET
D160P67Indscp-201.dgn		DRAWN PB	REVISED -	STATE OF ILLINOIS	LANDSCAPING SCHEDULE AND DETAILS		90/94/ 2011-055-	COOK 407 E7
	PLOT SCALE =	CHECKED TW	REVISED -	DEPARTMENT OF TRANSPORTATION			CONTRACT NO 60P67	
	PLOT DATE = 09/07/11	DATE 09/07/11	REVISED -		SCALE:	SHEET NO. 1 OF 1 SHEETS STA. TO STA.	FED. ROAD DIST. NO. 1	ILLINOIS FED. AID PROJECT