

GENERAL NOTES


- Fasteners shall be AASHTO M164 Type 3. Bolts 7/8" diameter, holes 5/16" diameter, unless otherwise noted.
- Calculated weight of Structural Steel = 271,870 lbs.
- All structural steel shall be AASHTO M270 Grade 50W. All structural steel shall be cleaned as specified in the Special Provision for "Surface Preparation and Painting Requirements for Weathering Steel".
- No field welding is permitted except as specified in the contract documents.
- Reinforcement bars shall conform to the requirements of ASTM A706 Gr. 60.
- Reinforcement bars designated (E) shall be epoxy coated.
- If the Contractor elects to use cantilever forming brackets on the exterior beams or girders, the brackets shall be placed at the same locations required for the hardwood blocks in Article 503.06(b) of the Standard Specifications. If additional cantilever forming brackets are required, hardwood blocking shall be wedged between the exterior and first interior beam at each of these additional bracket locations.
- Bearing seat surfaces shall be constructed or adjusted to the designated elevations within a tolerance of 1/8 in. (0.01 ft.). Adjustment shall be made by either grinding the surface or by shimming the bearings.
- Structural steel shall only be painted for a distance equal to the depth of embedment into the concrete cap plus 3". Painted areas shall be primed in the shop with a Department approved zinc rich primer. Field painting will not be required.
- Layout of the slope protection system may be varied to suit ground conditions in the field as directed by the Engineer.
- The existing bearings contain lead. The Contractor shall take appropriate precautions to deal with the presence of lead on this project.
- The Contractor is advised that the existing concrete superstructure is a continuous structure and removal must be done in a proper sequence, possibly with falsework support.
- The existing concrete piles at the south abutment of existing Structure No. 038-0148 (NB) shall be left in place and the top portions removed to 1'-0" below the bottom of the proposed stone riprap bedding grade. Cost is included with Removal of Existing Structures.

INDEX OF SHEETS

- S1 General Plan and Elevation
- S2 General Notes, Index of Sheets and Total Bill of Material
- S3 Foundation Layout
- S4 Stage I Construction Details and Temporary Sheet Piling
- S5 Stage II Construction Details
- S6 Temporary Concrete Barrier for Stage Construction
- S7 Top of Slab Elevations (1 of 3)
- S8 Top of Slab Elevations (2 of 3)
- S9 Top of Slab Elevations (3 of 3)
- S10 Top of North Approach Slab Elevations
- S11 Top of South Approach Slab Elevations
- S12 Superstructure
- S13 Superstructure Details
- S14 Integral Abutment Diaphragm Details
- S15 Bridge Approach Slab Details (1 of 2)
- S16 Bridge Approach Slab Details (2 of 2)
- S17 Framing Plan
- S18 Structural Steel Details
- S19 Bearing Details
- S20 North Abutment Details
- S21 South Abutment Details
- S22 Pier 1 Details
- S23 Pier 2 Details
- S24 HP Pile Details
- S25 Bar Splicer Assembly and Mechanical Splicer Details
- S26 Cantilever Forming Brackets for Superstructures with W27 Beams and Smaller
- S27 Concrete Parapet Slipforming Option
- S28 Soil Boring Logs (1 of 5)
- S29 Soil Boring Logs (2 of 5)
- S30 Soil Boring Logs (3 of 5)
- S31 Soil Boring Logs (4 of 5)
- S32 Soil Boring Logs (5 of 5)
- S33-S41 Existing Plan Information

TOTAL BILL OF MATERIAL

ITEM	UNIT	TOTAL	SUPER	SUB
Stone Riprap, Class A4	Sq. Yd.	2,844		2,844
Filter Fabric	Sq. Yd.	2,844		2,844
Removal of Existing Structures	Each	2		
Structure Excavation	Cu. Yd.	472		472
Floor Drains	Each	20	20	
Concrete Structures	Cu. Yd.	305.4		305.4
Concrete Superstructure	Cu. Yd.	629.8	629.8	
Bridge Deck Grooving	Sq. Yd.	1,488	1,488	
Concrete Encasement	Cu. Yd.	19.6		19.6
Protective Coat	Sq. Yd.	1,860	1,860	
Furnishing and Erecting Structural Steel	L. Sum	1	1	
Stud Shear Connectors	Each	10,320	10,320	
Reinforcement Bars, Epoxy Coated	Pound	188,780	151,040	37,740
Bar Splicers	Each	1,656	1,320	336
Furnishing Steel Piles HP12x53	Foot	1,347		1,347
Driving Piles	Foot	1,347		1,347
Test Pile Steel HP12x53	Each	6		6
Pile Shoes	Each	56		56
Name Plates	Each	2	2	
Anchor Bolts, 1"	Each	96		96
Geocomposite Wall Drain	Sq. Yd.	154		154
Temporary Sheet Piling	Sq. Ft.	1,239		1,239
Pipe Underdrains For Structures, 4"	Foot	270		270
Porous Granular Embankment, Special	Cu. Yd.	220		220
Underwater Structure Excavation Protection - Location 1	Each	1		1
Underwater Structure Excavation Protection - Location 2	Each	1		1
Underwater Structure Excavation Protection - Location 3	Each	1		1
Underwater Structure Excavation Protection - Location 4	Each	1		1

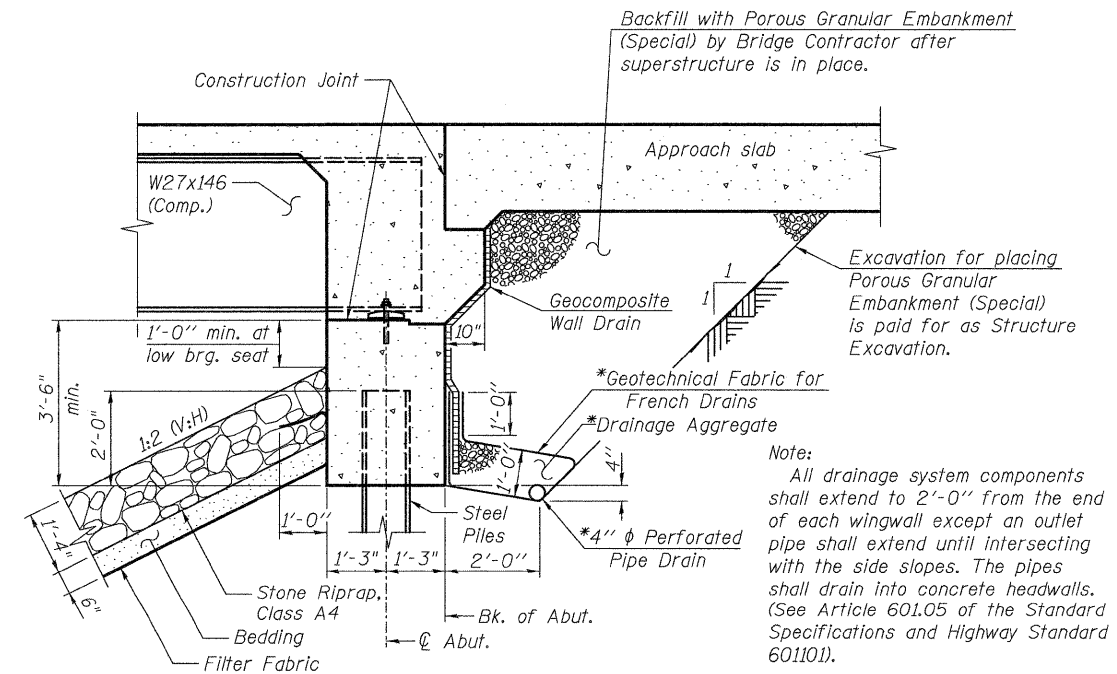

SECTION THRU INTEGRAL ABUTMENT

*Included in the cost of Pipe Underdrains for Structures, 4".

benesch
engineers · scientists · planners
Alfred Benesch & Company
205 North Michigan Avenue, Suite 2400
Chicago, Illinois 60601
312-565-0450 Job No. 3938.09

FILE NAME =	USER NAME = rgr:mm	DESIGNED - JLS	REVISED -
0380222&0223.66948.002_gennotes.dgn	PLOT SCALE =	CHECKED - AAY	REVISED -
	PLOT DATE = 08/18/2011	DRAWN - RMG	REVISED -
		CHECKED - KJN	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**GENERAL NOTES, INDEX OF SHEETS AND TOTAL BILL OF MATERIAL
STRUCTURE NO. 038-0222/0223**

SHEET NO. S2 OF S41 SHEETS

F.A.I. RTE. 57	SECTION (38-8) BR & BR-1	COUNTY IROQUOIS	TOTAL SHEETS 73	SHEET NO. 17
ILLINOIS FED. AID PROJECT			CONTRACT NO. 66948	

x:\3900s\3938\structures\1-57\over-springcreek\final.plans\0380222&0223.66948.002_gennotes.dgn 08/18/2011