

BAR d1(E)


BAR s1(E)

THE COST OF EPOXY GROUTING BARS SHALL BE INCLUDED WITH REINFORCEMENT BARS (EPOXY COATED).

REINFORCEMENT BARS SHALL CONFORM TO THE REOUIREMENTS OF ASTM A706 OR GR 60. SEE SPECIAL PROVISIONS.

REINFORCEMENT BARS DESIGNATED (E) SHALL BE EPOXY COATED.

FILE NAME =	USER NAME = piersonbr	DESIGNED - GAE	REVISED -			S.N. 057-0130 WINGWAL			F.A.I. RTF	SECTION	COUNTY TO	OTAL SHEET
c:\pw_work\pwidot\piersonbr\d0184863	.D570648-sht-details.dgn	DRAWN - BBP	REVISED -	STATE OF ILLINOIS		TYPE 6 GUARDRAL			74	(57-23.57-24)RS-1	MCLEAN	175 139
	PLOT SCALE = 40.0000 ' / in.	CHECKED -	REVISED -	DEPARTMENT OF TRANSPORTATION		ITPE O GUARDRAI		L			CONTRACT N	NO. 70648
	PLOT DATE = 8/26/2011	DATE - 08/08/11	REVISED -		SCALE: NONE	SHEET NO.1 OF 1 SHEETS	STA.	TO STA.	FED. ROAD	DIST. NO. ILLINOIS FED. A	ID PROJECT	

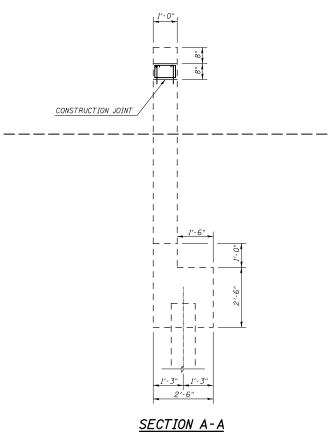

\* EPOXY GROUT BARS IN 9" MIN. HOLES ACCORDING TO ARTICLE 584 OF THE STANDARD SPECIFICATIONS.

BILL OF MATERIALS									
BAR	SHAPE	NO.	SIZE	LENGTH					
d1(E)		24	#4	1'-9 ''					
h(E)	h(E)		#4	3′-7 ′′					
h1(E)		16	#4	2'-5 ''					
h2(E)		8	#4	3'-4 ''					
s1(E)	s1(E)		#4	2'-9''					
CONCRETE	STRUCTURES	CU.YDS.	0.4						
REINFORCE EPOXY COA		LBS.	113.0						

BILL OF MATERIAL QUANTITIES INCLUDE ALL 4 WINGWALLS ON S.N. 057-0130