


**EXISTING TYPICAL SECTION  
SHERIDAN ROAD  
STA. 38+56 TO STA. 60+75**

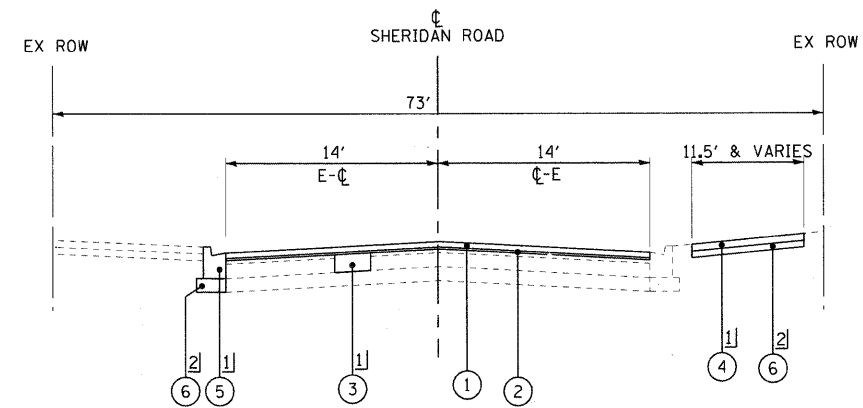

**PROPOSED TYPICAL SECTION  
SHERIDAN ROAD  
STA. 38+56 TO STA. 60+75**

- 1] AS INDICATED ON THE PLANS OR AS DETERMINED BY THE ENGINEER IN THE FIELD DURING CONSTRUCTION
- 2] AS REQUIRED

**EXISTING LEGEND**

- (A) HOT-MIX ASPHALT SURFACE, 2"
- (B1) HOT-MIX ASPHALT LEVEL BINDER COURSE, 3/4"
- (B2) HOT-MIX ASPHALT LEVEL BINDER COURSE, 2"-3"
- (C1) CONCRETE BASE COURSE
- (C2) BRICK BASE COURSE
- (D) COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.12
- (E) SIDEWALK
- (F) AGGREGATE BASE COURSE
- (G) SUB-GRADE
- (H) GROUND SURFACE
- (I) HOT-MIX ASPHALT SURFACE REMOVAL, 2"
- (J) COMBINATION CONCRETE CURB AND GUTTER REMOVAL AND REPLACEMENT
- (K) SIDEWALK REMOVAL
- (L) AGGREGATE BASE COURSE REMOVAL (NOT PAID FOR SEPARATELY)
- [Hatched Box] ITEM TO BE REMOVED

**PROPOSED LEGEND**

- (1) HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N70 - 1 1/2"
- (2) POLYMERIZED LEVELING BINDER (MACHINE METHOD), IL-4.75, N50-3/4"
- (3) CLASS D PATCHES. TYPE II - IV, 10 INCH
- (4) PORTLAND CEMENT CONCRETE SIDEWALK 5 INCH
- (5) COMBINATION CONCRETE CURB AND GUTTER REMOVAL AND REPLACEMENT
- (6) AGGREGATE BASE COURSE, TYPE B 4"

**LEGEND NOTES:**

1. SIDEWALK REMOVAL AND REPLACEMENT LOCATIONS TO BE DETERMINED BY THE ENGINEER, UNLESS OTHERWISE SHOWN.
2. CURB AND GUTTER REMOVAL AND REPLACEMENT LOCATIONS TO BE DETERMINED BY THE ENGINEER, UNLESS OTHERWISE SHOWN.

COPYRIGHT © 2008 BY BAXTER & WOODMAN, INC.  
 STATE OF ILLINOIS - PROFESSIONAL DESIGN FIRM  
 LICENSE NO. 184-00127 - EXPIRES 4/30/2011  
 10/15/2009 3:28:08 PM  
 I:\Projects\990831-Sheridan\plan\cadd\survey\drawings\cadd\sheet\090831-typsec.sht



DESIGNED - SLN	REVISED - IDOT REVIEW 10/05/09
DRAWN - KAR	REVISED -
CHECKED - RWL	REVISED -
DATE - 08-20-09	FILE - 090831-typsec.sht

**CITY OF HIGHWOOD, ILLINOIS  
SHERIDAN ROAD ARRA (LAPP)  
RESURFACING**

**TYPICAL SECTIONS AND  
HMA MIXTURE REQUIREMENTS**

SCALE: NONE

STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
2744	09-00053-00-RS	LAKE	25	5
FED. ROAD DIST. NO. 1 C-91-891-09		CONTRACT NO. 63338		
[ILLINOIS] FED. AID PROJECT ARA-9003(45/7)				