

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

NORTH CURB LINE/NORTH FACE OF PARAPET

Location	Station	Offset	Theoretical Grade Elevations
East End of Deck	324+14.15	-18.00	616.13
A	324+24.15	-18.00	616.06
B	324+34.23	-18.42	615.98
End East Appr. Slab	324+44.23	-18.42	615.89

NORTH EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
East End of Deck	324+13.10	-12.00	616.26
A	324+23.10	-12.00	616.19
B	324+33.10	-12.00	616.12
End East Appr. Slab	324+43.10	-12.00	616.04

**☉ ROADWAY, STAGE CONSTRUCTION
LINE & PROFILE GRADE LINE**


Location	Station	Offset	Theoretical Grade Elevations
East End of Deck	324+10.98	0.00	616.46
A	324+20.98	0.00	616.39
B	324+30.98	0.00	616.32
End East Appr. Slab	324+40.98	0.00	616.24

SOUTH EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
East End of Deck	324+08.86	12.00	616.28
A	324+18.86	12.00	616.22
B	324+28.86	12.00	616.15
End East Appr. Slab	324+38.86	12.00	616.07

SOUTH CURB LINE/SOUTH FACE OF PARAPET

Location	Station	Offset	Theoretical Grade Elevations
East End of Deck	324+07.81	18.00	616.17
A	324+17.81	18.00	616.10
B	324+27.73	18.42	616.02
End East Appr. Slab	324+37.73	18.42	615.95

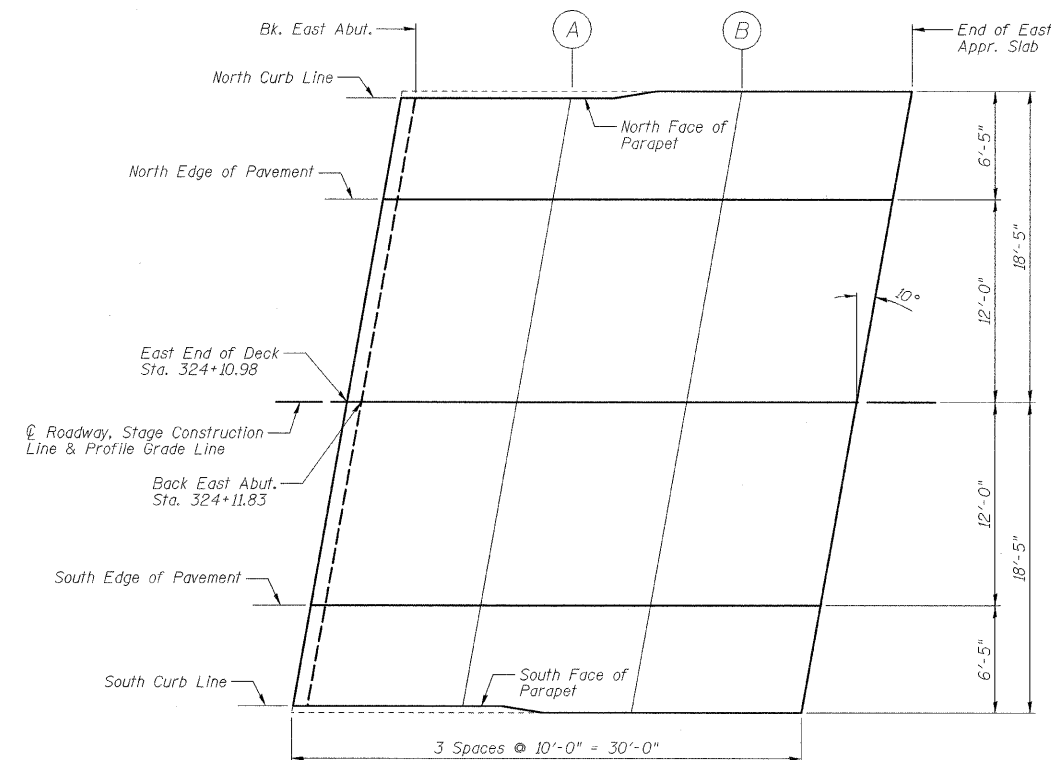

EAST APPROACH SLAB PLAN



**TOP OF EAST APPROACH
SLAB ELEVATIONS
STRUCTURE NO. 053-0150**

DESIGNED	SDH
CHECKED	JML
DRAWN	JWK/DJM
CHECKED	MSW

DATE 10/07/09

FARNSWORTH GROUP, INC.

CONSULTING ENGINEERS - 2709 MCGRAW DRIVE BLOOMINGTON, ILLINOIS 61704 (309) 663-8435 / (309) 663-1571 FAX

SHEET NO. B9	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	41	15BR-2	LIVINGSTON	04	25
34 SHEETS	CONTRACT NO. 66691				
FED. ROAD DIST. NO.		ILLINOIS FED. AID PROJECT			