ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	11-00039-00-SW	MOULTRIE	44	23
FED. ROAD DIST. NO. 7	ILLINOIS	FED. AID PROJECT-		

CONTRACT #95696

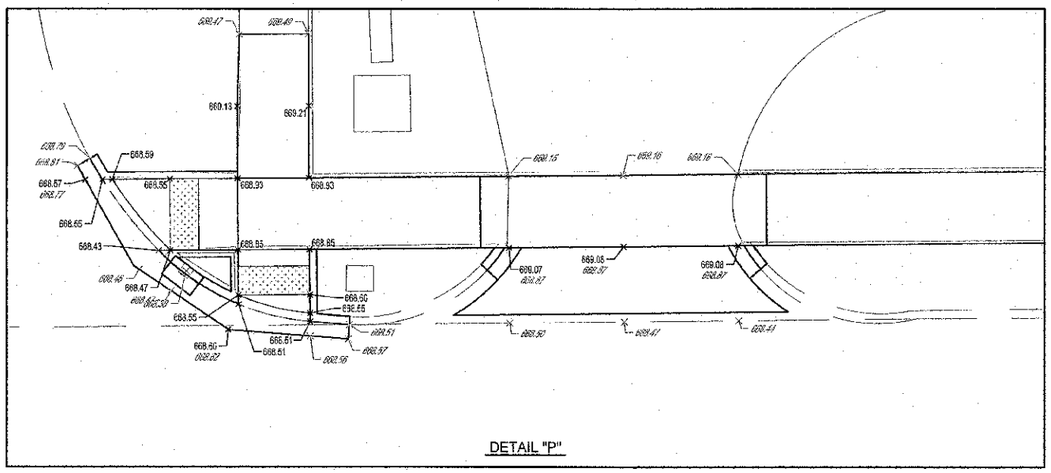
DETAIL "P"

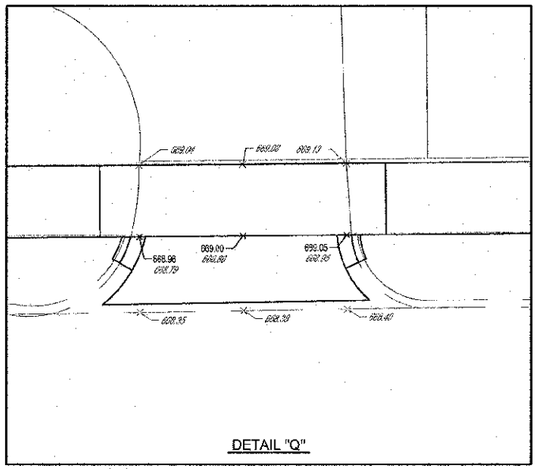
DETAIL "Q"

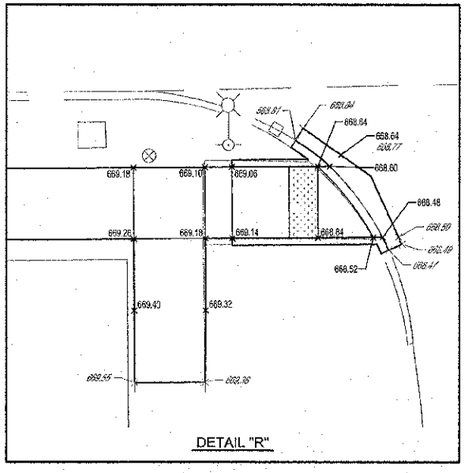
DETAIL "R"

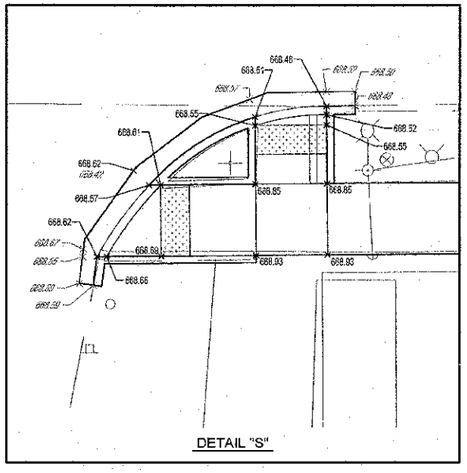
DETAIL "S"

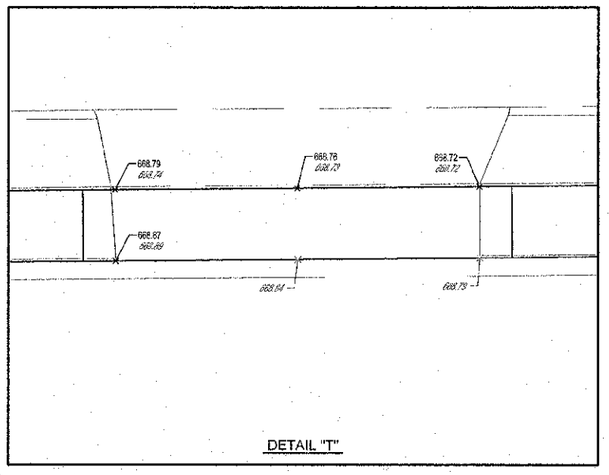
DETAIL "T"

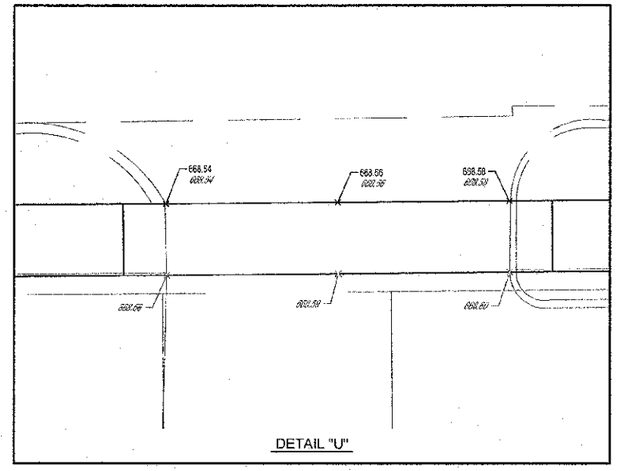
DETAIL "U"



SIDEWALK CONSTRUCTION NOTES:

1. SIDEWALK THAT HAS A RUNNING GRADE BETWEEN 5% (20:1) AND 8.33% (12:1) SHALL BE TEXTURED TO CREATE A NON-SLIP SURFACE.
2. CROSS SLOPE ON SIDEWALK SHALL NOT EXCEED 1.50%.
3. NO SIDEWALK SHALL HAVE A RUNNING GRADE EXCEEDING 8.33% (12:1).
4. EXPANSION JOINT MATERIAL SHALL BE PLACED ALONG THE EXISTING BUILDING AND FOUNDATIONS ADJACENT AND FULL DEPTH TO THE P.C.C. SIDEWALK 4 INCH.

MILANO & GRUNLOH ENGINEERS, LLC
114 WEST WASHINGTON
P.O. BOX 697
EFFINGHAM, ILLINOIS 62401
Phone: (217) 347-7202
(800) 677-2714
Fax #: (217) 342-3433
Web Address: www.mgengineers.com
Design Firm #: 184-001108

File name: S:\DWG\10\10295\dwg\Sidewalk.dwg
Plot date: 11/06/12 at 15:45
F.B. 659,670,671

SIDEWALK PLAN
HAMILTON STREET
CITY OF SULLIVAN, ILLINOIS