



Illinois Department of Transportation

Office of Intermodal Project Implementation / Division of Aeronautics
1 Langhorne Bond Drive / Springfield, Illinois 62707-8415

January 4, 2024

SUBJECT: Coles County Memorial Airport
Mattoon, Illinois
Coles County
Illinois Project Number: MTO-4816
SBG Project Number: N/A
Contract No. CO072
Item No. 16A, January 19, 2024 Letting
Addendum A

NOTICE TO PROSPECTIVE BIDDERS

Attached is an addendum to the plans or proposal. This addendum involves revised and/or added material.

Reason for Addendum:

This addendum includes a modification to the light poles as detailed on sheet 36 of the plan set.

To All Plan Holders:

See Revised Sheet 36.

Plan Changes:

Replace Sheet 36 in the plan with the attached revised Sheet 36.

Special Provisions Changes:


N/A

Schedule of Prices Changes:

N/A

Prime contractors must utilize the enclosed material when preparing their bid and must include any changes to the Schedule of Prices in their bid.

Questions on this addendum may be directed to Lindsay Hausman of Hanson Professional Services Inc. at 217.747.9314.



RECONSTRUCT WEST AIRCRAFT T-HANGAR AREA PAVEMENTS

IDA No: MTO-4816
SBG Project No: N/A
Contract No. CO072

NO.	DATE	DESCRIPTION
1	1/3/24	Addendum 1 RDN LDH KNL
		DES DWN REV

ISSUE: 11/17/2023
PROJECT NO: 22A0001D
CAD FILE: E-615-DETAIL AND LGHT SCHED.DWG
DESIGN BY: RDN 10/24/2023
DRAWN BY: MLM 10/24/2023
REVIEWED BY: KNL 11/13/2023



SHEET TITLE

LIGHTING SCHEDULE & ELECTRICAL DETAILS

LIGHTING FIXTURE SCHEDULE						
FIXT. TYPE	DESCRIPTION	MANUFACTURER & CATALOG NO.	LAMPS/ WATTS	VOLTS	MOUNTING	REMARKS
F1	LED AREA LIGHT FIXTURE, SINGLE PIECE DIE CAST ALUMINUM HOUSING WITH INTEGRAL HEAT SINK, MODULAR DESIGN FOR EASE OF MAINTENANCE, PRECISION MOLDED SILICONE LENS, IP-66 RATED, L81 RATING OF 100,000 HOURS, ZINC INFUSED TGIC THERMOSET POWDER COAT FINISH, DARK BRONZE, FUSED.	LITHONIA: DSXI-LED-P8-40K-70CRI-T2M OR APPROVED EQUAL	216W LED	120	POLE MOUNTED TO A 25 FT. ROUND TAPERED STEEL POLE WITH A MINIMUM EPA RATING OF 5 AT 100 MPH. DARK BRONZE POLE FINISH.	FIXTURE TO BE CONTROLLED THROUGH A LIGHTING CONTACTOR PANEL AS DETAILED ON THE PLANS.
F2	WALL MOUNTED LED EXTERIOR LIGHT FIXTURE, CAST ALUMINUM HOUSING, DARK BRONZE POLYESTER POWDER COAT FINISH, ONE PIECE GASKET, IP-65 RATED, L90 RATING AT 100,000 HOURS.	LITHONIA: TWR2-LED-ALO-MED-40K-VVOLT OR APPROVED EQUAL	83W LED, 12,100 LUMENS	120	WALL MOUNTED TO HANGAR WALL 12 FT. 0" ABOVE FINISHED GRADE.	PROVIDE BACK BOX OR WALL MOUNTING BRACKET AS REQUIRED BY THE MANUFACTURER. FIXTURE TO BE CONTROLLED THROUGH A LIGHTING CONTACTOR PANEL AS DETAILED ON THE DRAWINGS.

LIGHTING FIXTURE SCHEDULE NOTES:

- IF ALTERNATE LIGHT FIXTURES ARE SUBMITTED INCLUDE A PHOTOMETRIC STUDY OF THE AREA TO IDENTIFY LIGHT LEVELS AROUND THE HANGARS.
- STEEL LIGHT POLES, REINFORCING STEEL, AND GROUND RODS SHALL BE MANUFACTURED IN THE UNITED STATES OF AMERICA FROM DOMESTIC STEEL TO COMPLY WITH THE STEEL PRODUCTS PROCUREMENT ACT (30 ILS 565)

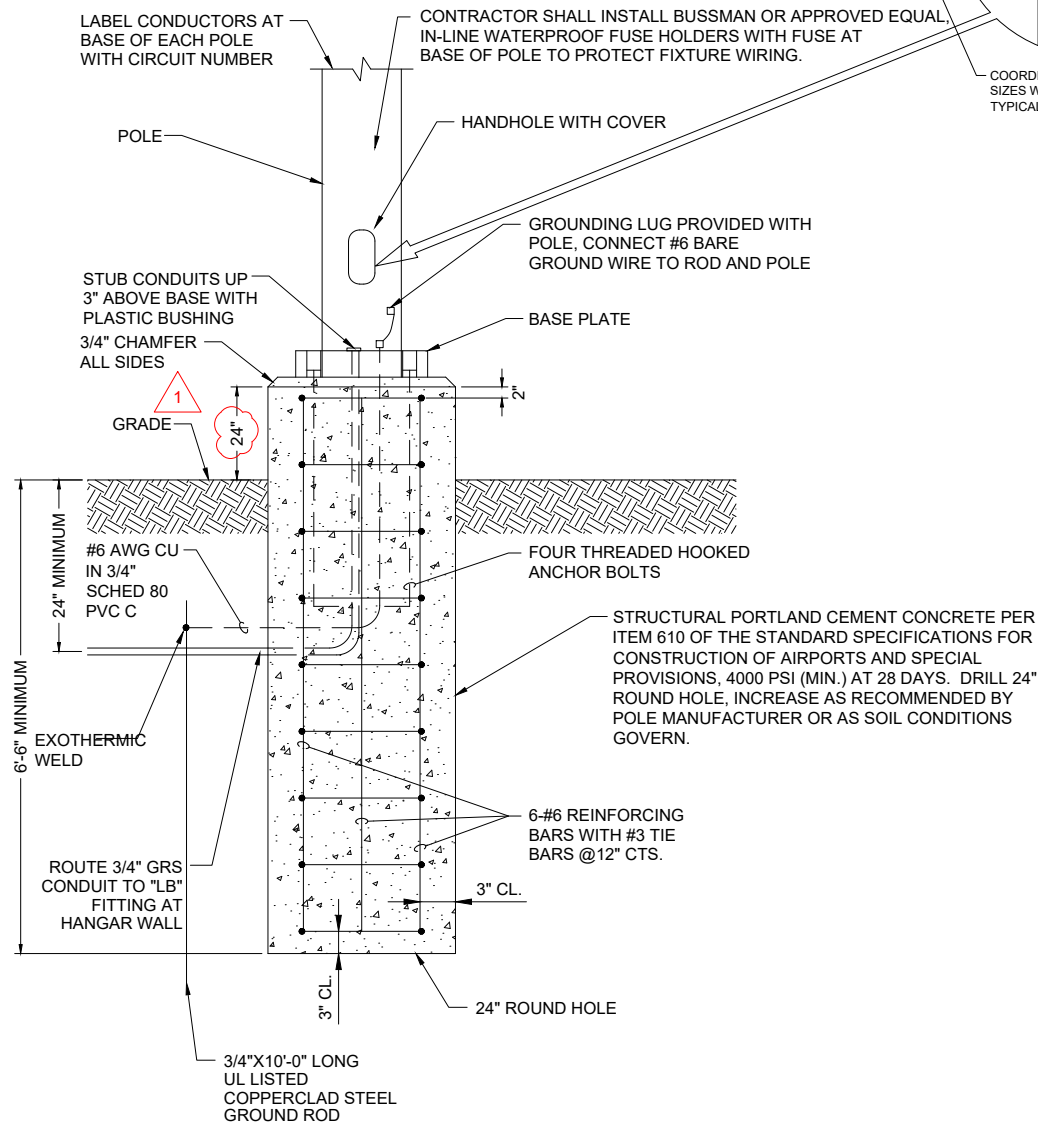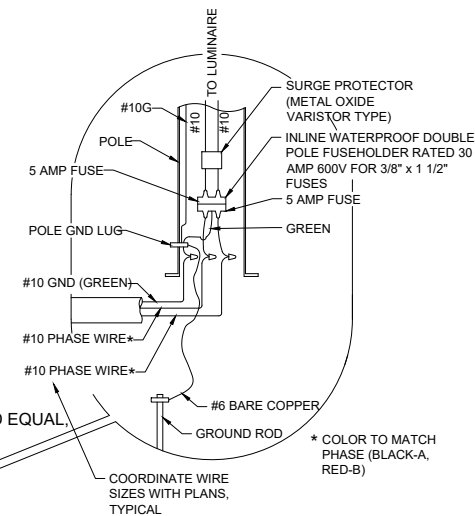

LIGHT POLE FOUNDATION & HANDHOLE DETAIL