




F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
328	5R, Y, RS-1	CLAY	242	88
STA.		TO STA.		
FED. ROAD DIST. NO. 7		ILLINOIS	FED. AID PROJECT	
CONTRACT NO. 74078				

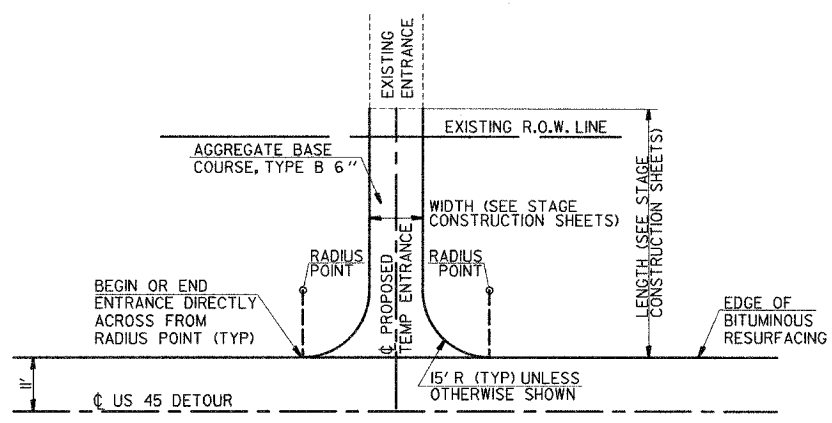

TEMPORARY ENTRANCE WITHOUT MAILBOX TURNOUT PLAN

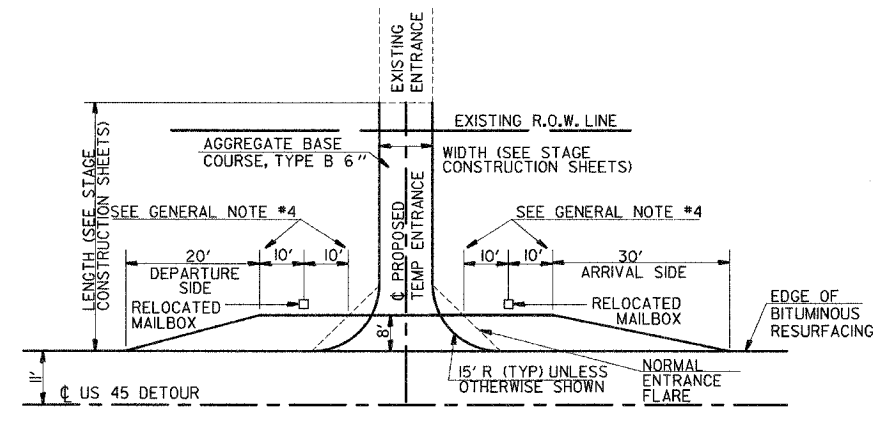


TEMPORARY ENTRANCE WITH MAILBOX TURNOUT PLAN

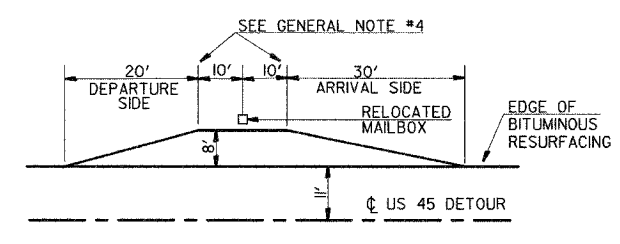


TEMPORARY MAILBOX TURNOUT WITHOUT ENTRANCE PLAN

GENERAL NOTES

1. AGGREGATE BASE COURSE, TYPE B OF THE THICKNESS SPECIFIED IN THE PLANS SHALL BE USED TO CONSTRUCT ALL TEMPORARY MAILBOX TURNOUTS.
2. THE AGGREGATE BASE COURSE SHALL BE CONSTRUCTED TO DIMENSIONS AS SHOWN.
3. THE TEMPORARY RELOCATION OF EXISTING MAILBOXES SHALL BE IN ACCORDANCE WITH ARTICLE 107.20 (107.19) OF THE STANDARD SPECIFICATIONS.
4. WHEN MORE THAN ONE RELOCATED MAILBOX IS INCLUDED IN A PARTICULAR LOCATION THE TWO 10' DIMENSIONS AS SHOWN SHALL BE FROM THE END MAILBOX.
5. CROSS SLOPE SHALL BE AS SHOWN ON THE STATION CROSS SECTIONS AND/OR AS DIRECTED BY THE ENGINEER. MIN 4% (1/2'') DESIRABLE; MAX. 8% (1'')

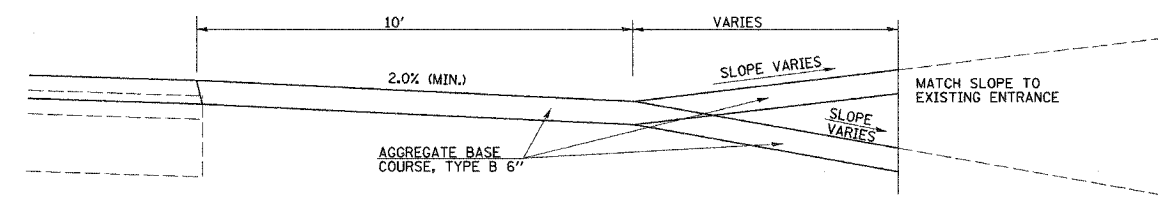

TEMPORARY ENTRANCE PROFILE

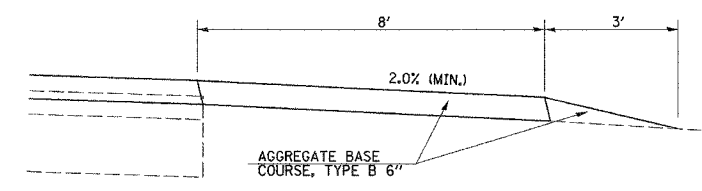

TEMPORARY MAILBOX TURNOUTS WITHOUT ENTRANCE PROFILE

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

TEMPORARY ENTRANCE & MAILBOX TURNOUT DETAILS

SCALE: NO SCALE DRAWN BY: BAD

DATE: 10-21-05 CHECKED BY: MAR