


BEARING SEAT ELEVATIONS

Beam	Bearing Seat Elevation
1	643.60
2	643.69
3	643.79
4	643.88
5	643.97
6	644.06
7	644.06
8	643.97
9	643.88
10	643.79
11	643.69
12	643.60

Notes:
 See Sheet S22 for Section A-A, Section B-B, and Detail C.
 Hatched area to be poured after superstructure false work has been removed. Cost included with Concrete Superstructures.
 Space reinforcement in caps to miss anchor bolts.
 Pour steps monolithically with cap.
 Drill and Grout bars to be installed according to Section 584 of the Standard Specifications. Cost included with Reinforcement Bars, Epoxy Coated.
 For details of Bar Splicers, see Sheet S25.

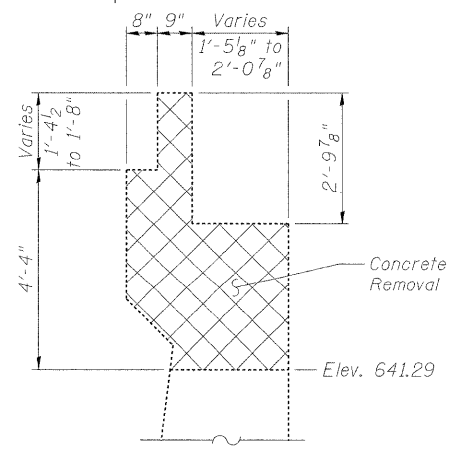

FILE NAME = g:\project\2102155_00\p\road\structure\1\0160506-00\02-021-S_Abnt_L.dgn