

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

ROUTE NO.	SECTION	COUNTY	JOIN SHEETS	SHEET NO.	SHEET NO. 6 20 SHEETS
FAS 1190	(125B)1BR	KNOX	94	48	
FED. ROAD DIST. NO. 7		ILLINOIS FED. AID PROJECT			

Contract No. 68087

EAST EDGE OF SHOULDER

Location	Station	Offset	Theoretical Grade Elevations
N. end of S. appr. slab	151+23.83	-18.00	724.57
M	151+33.83	-18.00	724.88
N	151+43.83	-18.00	725.21
S. end of S. appr. slab	151+53.83	-18.00	725.54

EAST EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
N. end of S. appr. slab	151+24.88	-12.00	724.73
M	151+34.88	-12.00	725.04
N	151+44.88	-12.00	725.37
S. end of S. appr. slab	151+54.88	-12.00	725.70

ROADWAY, PG. & STAGE CONSTRUCTION JOINT


Location	Station	Offset	Theoretical Grade Elevations
N. end of S. appr. slab	151+27.00	0.00	724.98
M	151+37.00	0.00	725.30
N	151+47.00	0.00	725.62
S. end of S. appr. slab	151+57.00	0.00	725.96

WEST EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
N. end of S. appr. slab	151+29.12	12.00	724.86
M	151+39.12	12.00	725.18
N	151+49.12	12.00	725.51
S. end of S. appr. slab	151+59.12	12.00	725.84

WEST EDGE OF SHOULDER

Location	Station	Offset	Theoretical Grade Elevations
N. end of S. appr. slab	151+30.17	18.00	724.77
M	151+40.17	18.00	725.09
N	151+50.17	18.00	725.42
S. end of S. appr. slab	151+60.17	18.00	725.76

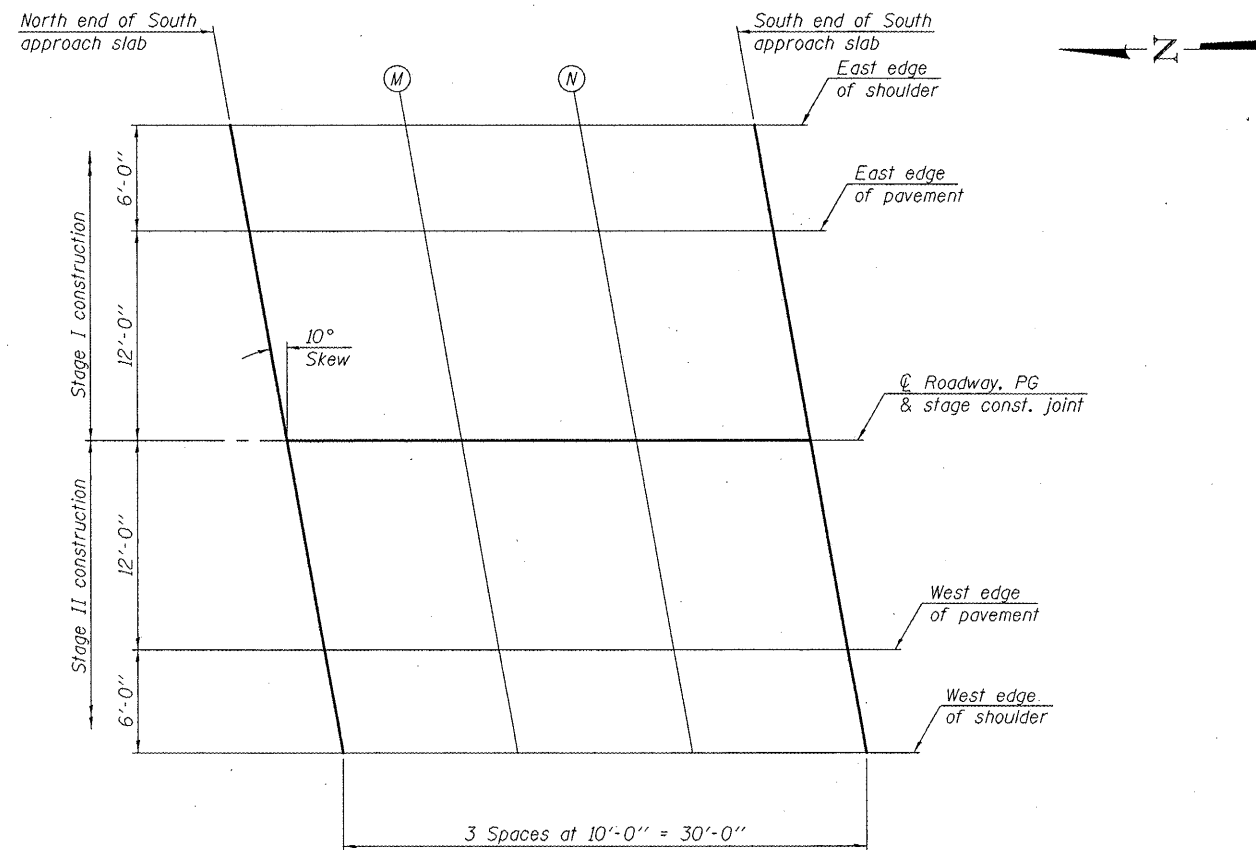

PLAN

DESIGNED	SMR
CHECKED	FT
DRAWN	MBM
CHECKED	SMR/FT

US ROUTE 150 OVER HENDERSON CREEK  
F.A.S. ROUTE 1190 - SEC. (125B)1BR  
KNOX COUNTY  
STATION 150+71.00  
STRUCTURE NO. 048-0088  
**TOP OF SOUTH APPROACH  
SLAB ELEVATIONS**