


AGGREGATE DITCH /FILTER FABRIC

STATION	TO	STATION	SIDE	W1 FOOT	DITCH BOTTOM FOOT	W2 FOOT	AGGREGATE DITCH TON	FILTER FABRIC SQ YD
147+00.00		148+00.00	LT	3	0	3	36	78
148+00.00		149+50.00	LT	2	2	2	52	115
149+50.00		150+90.00	LT	2	2	2	51	113
147+00.00		148+50.00	RT	2	2	2	54	118
148+50.00		150+00.00	RT	2	2	2	52	115
150+00.00		151+00.00	RT	2	2	2	37	81
162+00.00		163+50.00	LT	2	2	2	52	115
163+50.00		165+50.00	LT	2	2	2	70	154
162+00.00		163+50.00	RT	2	2	2	52	115
163+50.00		163+74.00	RT	2	2	2	9	20
164+66.00		168+00.00	RT	2	2	2	116	256
TOTAL							581	1280

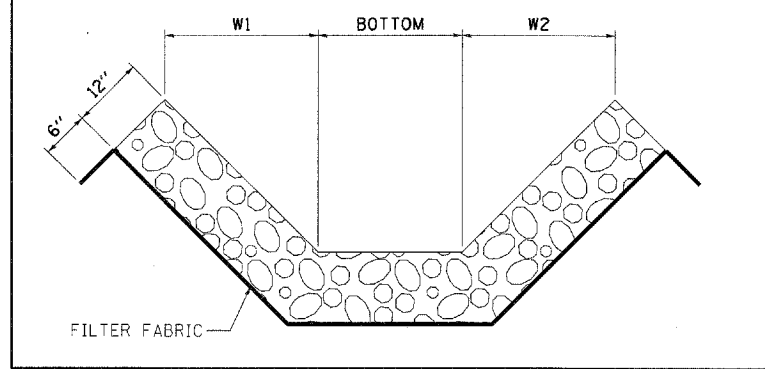

SHOULDER WIDENING

STATION	TO	STATION	SIDE	PCC BASE CSE WIDENING 10"	PCC BASE CSE WIDENING 12"	PAVED SHOULDER REMOVAL SQ YD	EARTH EX (WIDENING) CU YD
145+99.00		148+45.50	RT			83	12.6
153+10.30		153+63.35	LT	18		18	1.0
156+55.10		168+55.00	LT	400		401	22.2
165+05.20		165+49.90	RT			15	10.1
165+49.90		167+00.00	RT		154	51	40.0
166+00.00		168+55.00	LT			85	
TOTAL				418	154	653	90

HOT-MIX ASPHALT

STATION	TO	STATION	HMA SURFACE TON	HMA BINDER TON	FULL DEPTH SQ YD	BIT MATERIALS ON HMA GAL	BIT MATERIALS ON AGGREGATE GAL
147+00.00		148+02.30	4*			3	
147+20.10		148+02.30		5*		3	
147+00.00		148+69.10	76			55	
147+20.10		148+69.10		247		49	
148+69.10		152+32.80			1452	117	552
152+32.80		152+63.71			123	10	47
BRIDGE OMISSION							
158+36.29		160+50.00			570	46	217
160+50.00		163+50.00			983	79	374
163+50.00		165+49.90			777	63	296
165+49.90		167+19.60		274		54	
165+49.90		168+00.00	110			78	
167+00.00		167+19.60		2*		1	
167+00.00		168+00.00		4*		3	
TOTAL			194	528	3905	561	1486

* QUANTITY GIVEN TO PAVE 3' WIDE HMA SHOULDERS, VARIABLE DEPTH (UP TO 8") WITH MAINLINE HMA SURFACE.

HMA SHOULDERS

STATION	TO	STATION	SIDE	8" SQ YD	13 1/2" SQ YD	BIT MATERIALS ON HMA ** GAL
148+02.30		152+54.90	LT	274		2.5
145+99.00		150+44.40	RT		143	1.3
150+44.40		152+63.70	RT		261	2.4
152+91.90		153+20.00	LT	21		0.2
158+36.29		160+58.60	LT	260		2.4
158+36.29		159+91.30	RT		184	1.7
159+91.30		161+31.76	RT		47	0.5
160+81.10		169+50.00	LT	258		2.3
161+31.76		164+01.00	RT	89		0.8
164+35.96		167+00.00	RT	87		0.8
TOTAL				989	635	15

** PRIME INCLUDED FOR 2" SURFACE AFTER REMOVAL OF STAGED CONSTRUCTION.

AGGREGATE SHOULDERS, TYPE B 6"

STATION	TO	STATION	SIDE	SQ YD
147+28.00		150+51.00	LT	117
147+00.00		150+44.40	RT	192
159+91.30		164+01.04	RT	157
161+04.00		166+25.07	LT	284
164+35.96		168+00.00	RT	123
TOTAL				873

PAVEMENT MARKING & SHORT TERM PAVEMENT MARKING

STATION	TO	STATION	SIDE	PAINT PVMT MARKING		SHORT	REMARKS
				WHITE 4" FOOT	YELLOW 4" FOOT	TERM PM FOOT	
147+00.00		152+33.00	LT	533		44	EDGE LINE
152+33.00		153+22.00	LT	90		8	EDGE LINE
153+22.00		168+55.00	LT	1533		124	EDGE LINE
145+80.00		152+33.00	LT	653		120	LANE LINE
144+37.00		168+43.00	CL		4812	440	CL NO PASSING
173+40.00		175+00.00	CL		320	32	CL NO PASSING
145+80.00		160+50.00	RT	1470		120	EDGE LINE
160+50.00		163+50.00	RT	301		28	EDGE LINE
163+50.00		168+48.00	RT	498		92	LANE LINE
163+50.00		168+00.00	RT	450		36	EDGE LINE
TOTAL				5528	5132	1044	

AGGREGATE BASE COURSE, TYPE B 12"

STATION	TO	STATION	SQ YD
149+29.50		150+00.00	305
150+00.00		151+00.00	433
151+00.00		152+00.00	433
152+00.00		153+00.00	400
153+00.00		153+60.60	185
BRIDGE OMISSION			
157+39.40		158+00.00	182
158+00.00		159+00.00	300
159+00.00		160+00.00	300
160+00.00		161+00.00	305
161+00.00		162+00.00	341
162+00.00		163+00.00	381
163+00.00		164+00.00	417
164+00.00		165+05.20	444
165+05.20		165+49.90	60
TOTAL			4486

PAVEMENT MARKING REMOVAL

STATION	TO	STATION	PM REM SQ FT
153+22.00		168+55.00	511
145+80.00		152+33.00	218
144+37.00		147+00.00	175
168+00.00		168+43.00	29
173+40.00		175+00.00	107
145+80.00		147+00.00	40
168+00.00		168+48.00	16
			1096

WORK ZONE PAVEMENT MARKING REMOVAL

STATION	TO	STATION	STAGE I WHITE 4" SQ FT	STAGE II WHITE 4" SQ FT	WHITE 24" SQ FT
144+37.00					25
145+97.00		147+20.00	41		
144+47.00		147+20.00	91		
168+00.00		168+43.00	14		
173+40.00		174+40.00	33		
144+97.00		168+43.00		782	
173+40.00		174+90.00		50	
145+85.00		168+43.00		753	
175+00.00					25
			180	1585	50

TEMPORARY PAVEMENT MARKING ***

STATION	TO	STATION	STAGE I WHITE 4" FOOT	STAGE II WHITE 4" FOOT	WHITE 24" FOOT
144+37.00					12.5
145+97.00		152+62.00	677		
153+10.00		168+55.00	1545		
144+47.00		168+43.00	2396		
173+40.00		174+40.00	100		
144+97.00		168+43.00		2346	
173+40.00		174+90.00		150	
145+85.00		168+43.00		2258	
175+00.00					12.5
			4718	4754	25

*** INCLUDED FOR CONTRACTOR INFORMATION ONLY. COST TO BE INCLUDED WITH TRAFFIC CONTROL & PROTECTION SPECIAL.

PRINTED DATE: 5/11/2011
FILE NAME: r:\projects\101\148\148_11_25_07_voracious_design\work_order_87\cadd\drawings\Sheets\101_Rt16_Schedules_2.dgn



USER NAME = #USER#	DESIGNED - JEH, ADG	REVISED -
PLOT SCALE = 1.0000' / IN.	DRAWN - JEH, ADG	REVISED -
PLOT DATE = 5/11/2011	CHECKED - DF	REVISED -
	DATE - 05-11-2011	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

MISCELLANEOUS SCHEDULES

SHEET NO 2 OF 2 SHEETS

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO
91	(5BR)B-1	COLES	91	10
CONTRACT NO 74244				
ILLINOIS FED. AID PROJECT				