


EROSION CONTROL SCHEDULE

LOCATION	PERIMETER EROSION BARRIER	EROSION CONTROL BLANKET	POTASSIUM FERTILIZER NUTRIENT	PHOSPHORUS FERTILIZER NUTRIENT	NITROGEN FERTILIZER NUTRIENT	MULCH, METHOD 2	SEEDING CLASS 2	TEMPORARY EROSION CONTROL SEEDING
	FOOT	SQ YD	POUND	POUND	POUND	ACRE	ACRE	POUND
NW QUADRANT	162.6		24.8	24.8	24.8	1.00	0.20	59.5
NE QUADRANT	57.3		24.8	24.8	24.8	1.00	0.20	60.5
SW QUADRANT	150.8		24.8	24.8	24.8	1.00	0.20	58.8
SE QUADRANT	155.1	428.7	24.8	24.8	24.8	1.00	0.21	62.0
SUBTOTAL	525.8	428.7	99.0	99.0	99.0	4.0	0.81	240.8
TOTAL =	526	429	99	99	99	4	1.00	241



PLAN	SURVEYED	DATE
	PLOTTED	
	CHECKED	
	BY	
	NOTE BOOK NO.	
	FILE NAME	

PROFILE	SURVEYED	DATE
	PLOTTED	
	CHECKED	
	BY	
	NOTE BOOK NO.	
	STRUCTURE NOTATIONS	

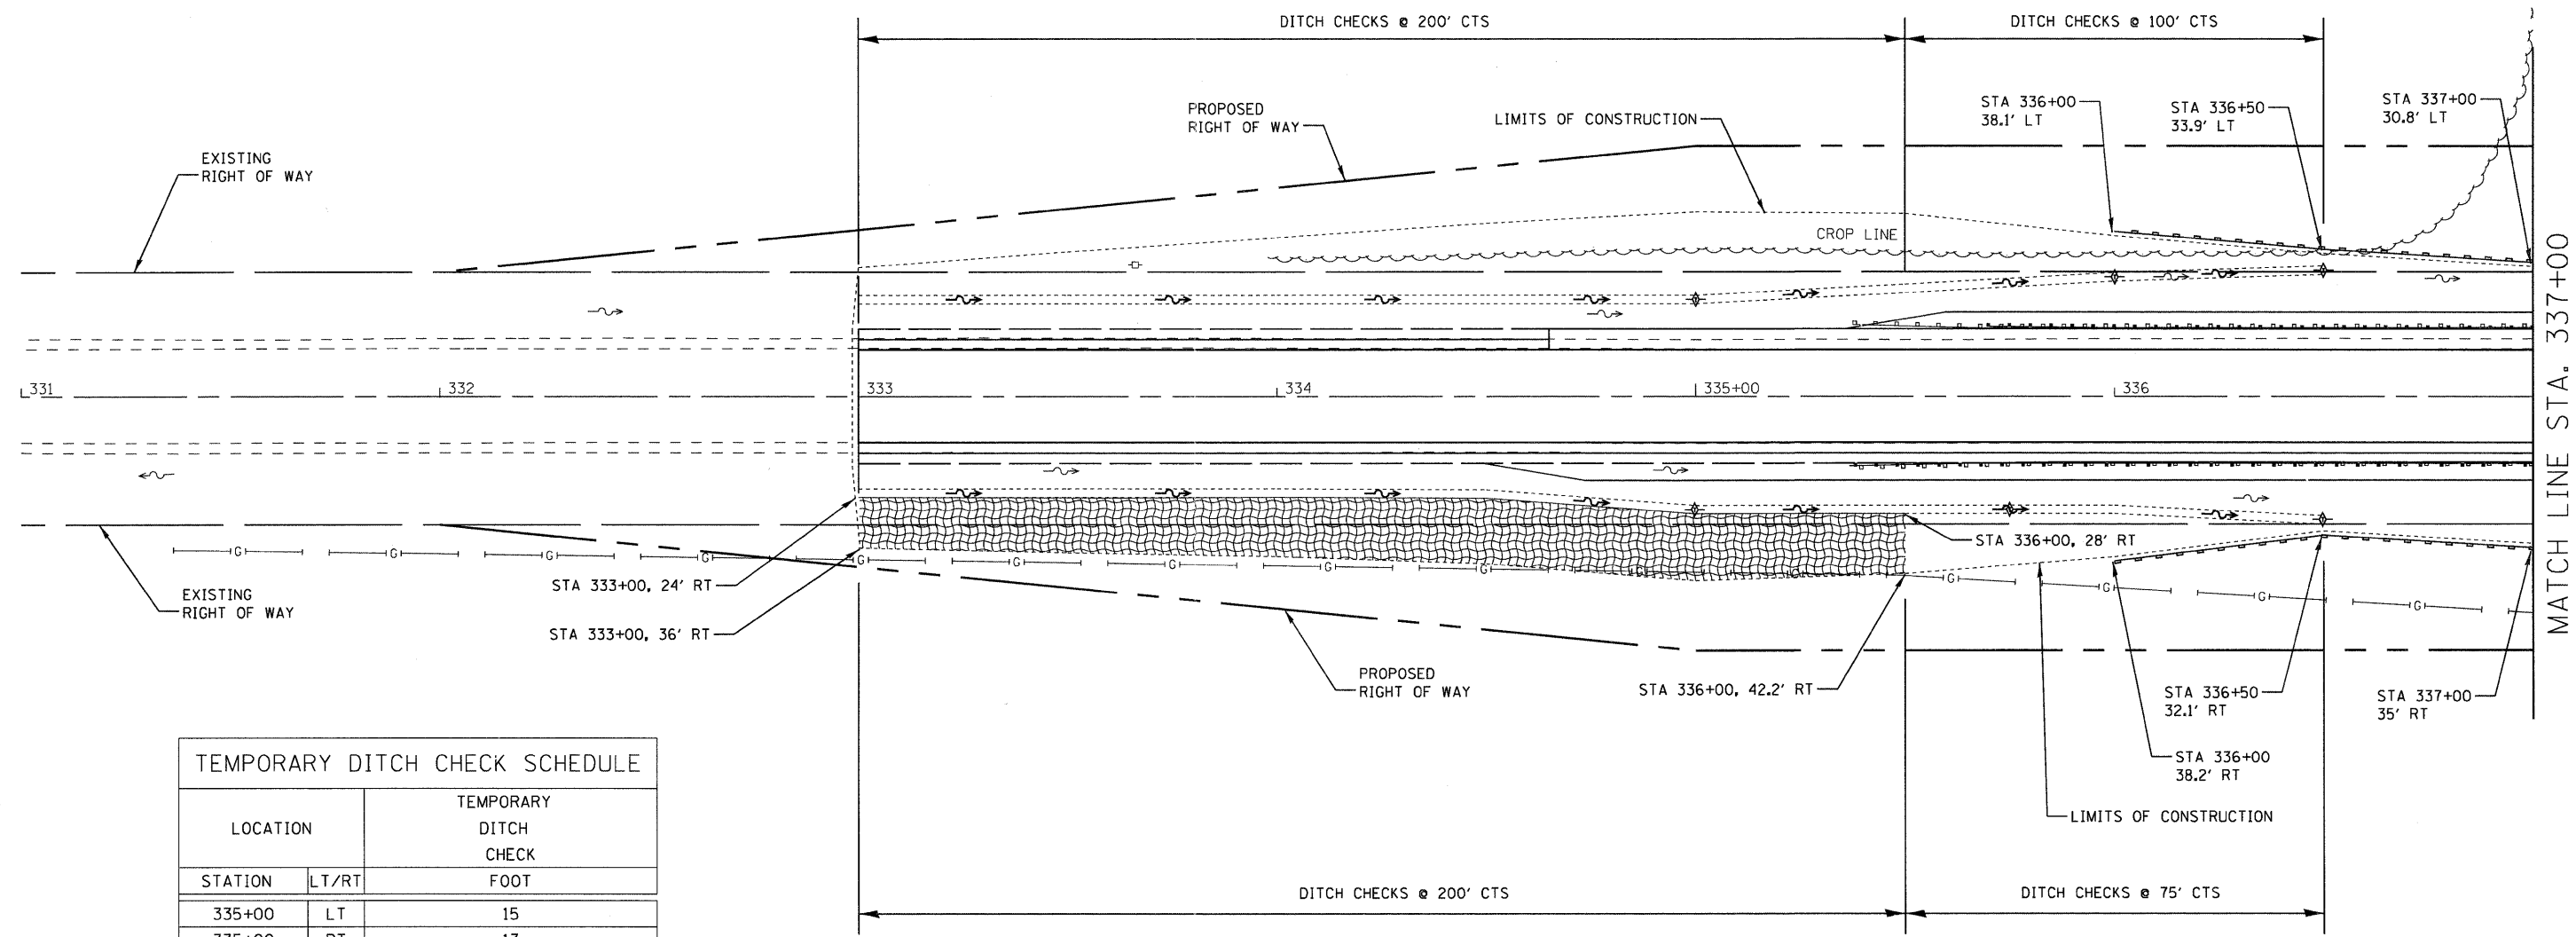

TEMPORARY DITCH CHECK SCHEDULE

LOCATION	TEMPORARY DITCH CHECK	
STATION	LT/RT	FOOT
335+00	LT	15
335+00	RT	13
335+75	RT	15
336+00	LT	15
336+50	LT	15
336+50	RT	15
339+00	RT	15
340+00	LT	15
340+00	RT	15
341+00	RT	15
342+00	RT	15
SUBTOTAL		163
TOTAL =		163

LEGEND

- EROSION CONTROL BLANKET
- PERIMETER EROSION BARRIER- SILT FILTER FENCE OR OTHER AS APPROVED BY THE ENGINEER
- TEMPORARY DITCH CHECK

