


| | | | | |
|-----------------------|---------|---------------------------|-----------------|--------------|
| F.A.U. RTE. | SECTION | COUNTY | TOTAL SHEETS | SHEET NO. |
| 1300 | 58RS-3 | COOK | 23 | 22 |
| STA. | | TO STA. | | |
| FED. ROAD DIST. NO. 1 | | ILLINOIS FED. AID PROJECT | | |

60468

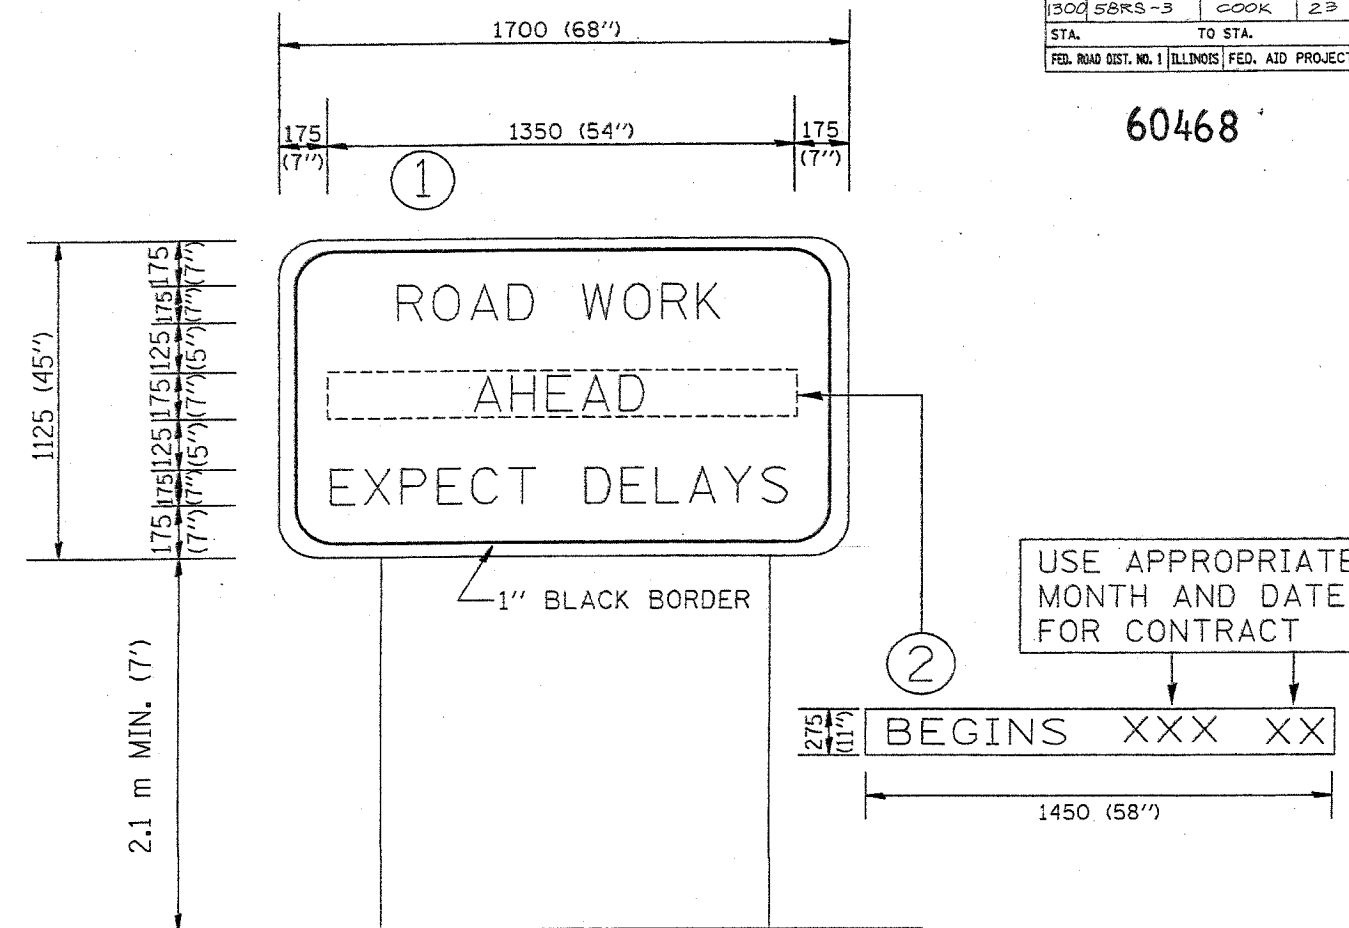

NOTES:

1. USE BLACK LETTERING ON ORANGE BACKGROUND.
2. ERECT SIGNS IN ADVANCE OF THE LOCATION FOR THE "ROAD CONSTRUCTION AHEAD" SIGN AT LOCATIONS AS DIRECTED BY THE ENGINEER.
3. ERECT SIGN ① WITH INSTALLED PANEL ② ONE WEEK PRIOR TO THE START OF CONSTRUCTION.
4. REMOVE PANEL ② SOON AFTER THE START OF CONSTRUCTION.
5. SEE SPECIAL PROVISION FOR "TEMPORARY INFORMATION SIGNING" FOR ADDITIONAL INFORMATION.
6. ONE SIGN ASSEMBLY EQUALS 2.3 SQ. M. (25.70 SQ. FT.)

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES)
UNLESS OTHERWISE SHOWN.

| REVISIONS | | ILLINOIS DEPARTMENT OF TRANSPORTATION TEMPORARY INFORMATION SIGNING |
|--------------|---------|---|
| NAME | DATE | |
| R. MIRS | 9-15-97 | SCALE: _____ DATE 03/08/2004 DRAWN BY: BUR. OF DESIGN CHECKED BY _____ |
| R. MIRS | 2-11-97 | |
| T. RAMMACHER | 2-2-99 | |
| | | |
| | | |
| | | |
| | | |
| | | |