

SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
99-00352-00-BT	CHAMPAIGN	38	18
STA.	TO STA.		
F.H.W.A. REG.	ILLINOIS	PROJECT	TE-0005(76)

NEVER CUT LEADERS. PRUNE ONLY BROKEN OR DEAD BRANCHES AT PLANTING TIME.

TREE SHALL BEAR SAME RELATIONSHIP TO FINISH GRADE AS IT BORE TO PREVIOUS EXISTING GRADE.

8" CORRUGATED PLASTIC PIPE 16" TALL TO PROTECT FROM MOWER DAMAGE

DO NOT PLANT TREE TOO DEEP; BE SURE THE BASAL ROOT FLARE IS VISIBLE.

3" SHREDDED BARK MULCH AVOID CONTACT WITH TRUNK.

REMOVE BURLAP FROM TOP 1/3 OF BALL.

BACKFILL WITH SOIL REMOVED FROM HOLE. DO NOT USE SOD PIECES OR CUTAWAY BURLAP AS BACKFILL.

TAMP SOIL AS HOLE IS FILLED.



FINISHED GRADE

SOIL UNDER ROOTBALL TO BE UNDISTURBED.



2-3 TIMES ROOTBALL DIAMETER

TREE PLANTING DETAIL

NOT TO SCALE

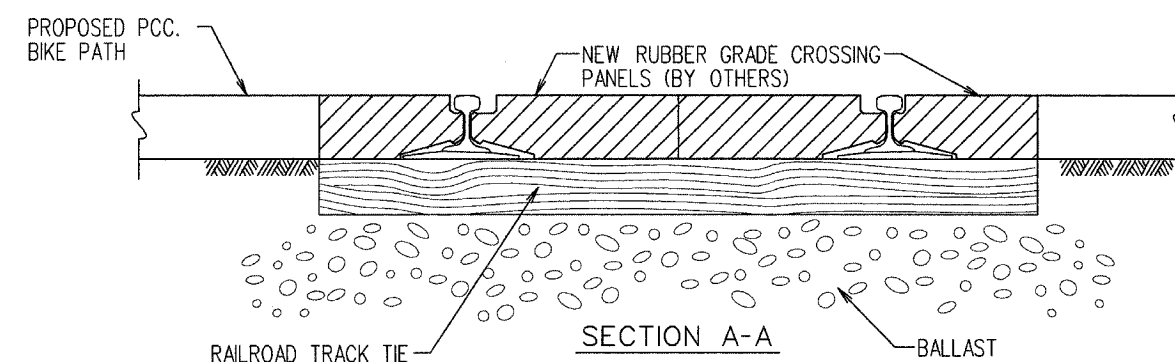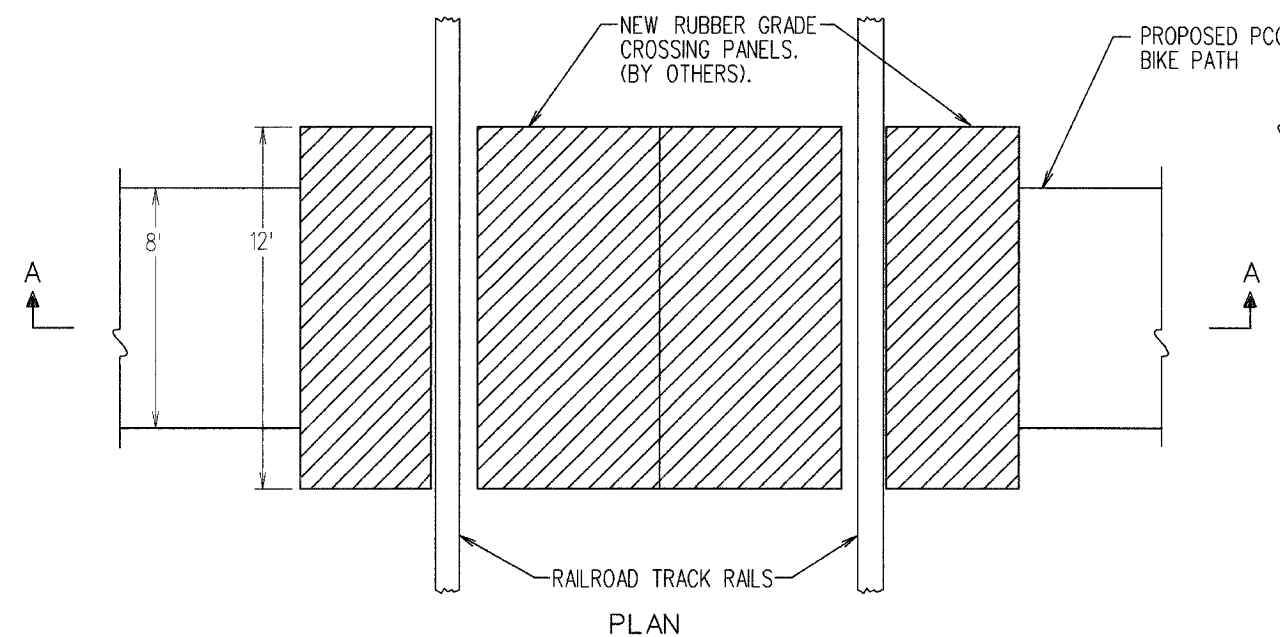

RAILROAD CROSSING DETAIL

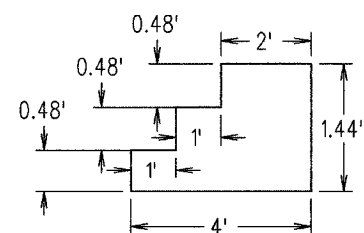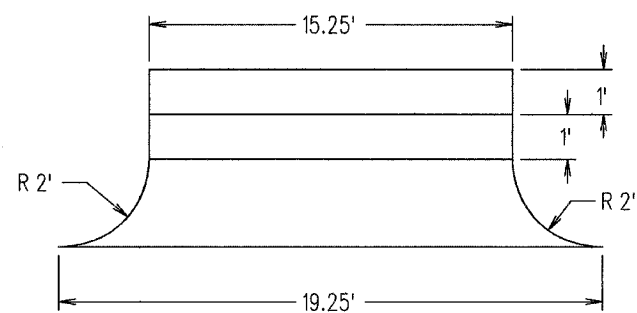

CONCRETE STEPS @ CAMPBELL HALL

NO SCALE STA. 18+25 TO 18+44

NOTE:

THIS WORK SHALL CONSIST OF REMOVING EXISTING CONCRETE STEPS AND BUILDING NEW CONCRETE STEPS ADJACENT TO THE WIDENED SIDEWALK AS SHOWN ON THE PLANS. THE WORK SHALL INCLUDE ALL LABOR, EQUIPMENT, AND MATERIALS FOR REMOVAL AND DISPOSAL OF EXISTING STEPS AND CONSTRUCTION OF NEW STEPS. THIS WORK SHALL BE PAID FOR AT THE CONTRACT PRICES PER CUBIC YARD FOR CONCRETE REMOVAL AND CLASS SI CONCRETE STEPS, AND NO ADDITIONAL COMPENSATION SHALL BE ALLOWED.

ESTIMATED QUANTITIES: CONCRETE REMOVAL = 2.6 CU YD
CLASS SI CONCRETE = 2.6 CU YD