SIGN DETAIL

1:75

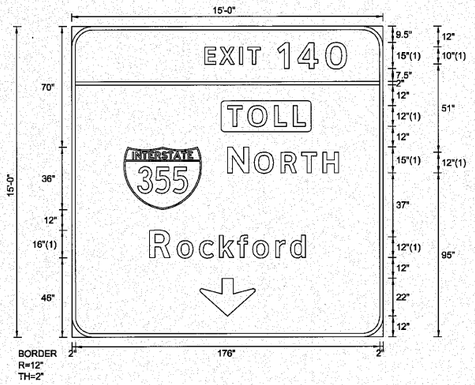

FONT:
(1) ClearviewHwy-5-W

Panel Style: Guide Sign.ssi
M.U.T.C.D.: 2009 Edition

SIGN NUMBER	WB-OHC-63; STA. 857+00	
WIDTH x HGHT.	15'-0" x 15'-0"	
BORDER WIDTH	2"	
CORNER RADIUS	12"	
MOUNTING	Overhead	
BACKGROUND	TYPE:	Reflective
	COLOR:	Green / Yellow
LEGEND/BORDER	TYPE:	Reflective
	COLOR:	White,Black /White

SYMBOL	ROT	X	Y	WID	HT
M1_1	0	30	74	45	36
ARDOWN	0	74	12	32	22

Panel Style: Guide Sign.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

																																		LENGTH	SERIES-SIZE
E	X	I	T	1	4	0																														ClearviewHwy-5-W
77	85.5	96.9	101.9	119	130.6	146.8																													82	10,15
T	O	L	L																																	ClearviewHwy-5-W
90	101.8	117.2	128																																45	12
N	O	R	T	H																																ClearviewHwy-5-W
90	105.5	121	132.9	145.1																															64.2	15,12
R	o	c	k	f	o	r	d																													ClearviewHwy-5-W
45	60.9	73.7	85.3	95.9	104.6	117.9	126.4																												90.1	16,129.8

FILE NAME =	DESIGNED - ST	REVISED -	LIN ENGINEERING,LTD. Consulting Engineers Chatham, Illinois Westmont, Illinois
N:\PROJ\3384\2_West\Design\Striping_Signing\Signing\signing-details.dgn	DRAWN - ST	REVISED -	
USER NAME = jkjellman	CHECKED - FML	REVISED -	
PLOT DATE = 12/6/2010	DATE - 10/2010	REVISED -	

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: _N.T.S._ | SHEET NO. __ OF __ SHEETS | STA. _____ TO STA. _____

F.A.-RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
80	99-5-Y	WILL	276	112
		CONTRACT NO. 60147		
FED. ROAD DIST. NO. _	ILLINOIS	FED. AID PROJECT		