SIGN DETAIL
1:75

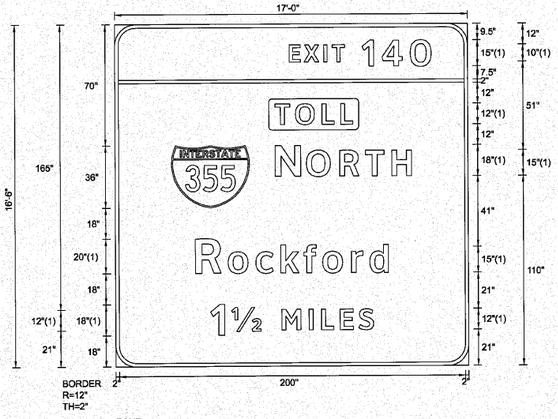

FONT:
(1) ClearviewHwy-5-W

Panel Style: Guide Sign.ssi
M.U.T.C.D.: 2009 Edition

Panel Style: Guide Sign.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

SIGN NUMBER	EB-BS-03; STA. 715+50
WIDTH x HGHT.	17'-0" x 16'-6"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Ground
BACKGROUND	TYPE: Reflective
	COLOR: Green / Yellow
LEGEND/BORDER	TYPE: Reflective
	COLOR: White,Black /White

SYMBOL	ROT	X	Y	WID	HT
M1_1	0	32.6	92	45	36

LETTER POSITIONS (X)

								LENGTH	SERIES/SIZE
E	X	I	T	1	4	0			ClearviewHwy-5-W
101	109.5	120.9	125.9	143	154.6	170.8		82	10,15
T	O	L	L						ClearviewHwy-5-W
92.6	104.3	119.7	130.6					45	12
N	O	R	T	H					ClearviewHwy-5-W
92.6	110.5	129.8	144.7	160				78.9	18,15
R	o	c	k	f	o	r	d		ClearviewHwy-5-W
46.2	65.1	81.1	95.6	108.8	119.7	136.4	147	111.6	20,15/12.2
1	1/2	M	I	L	E	S			ClearviewHwy-5-W
54.9	67	96	111.8	118.9	129.7	140.5		94.3	18,12

FILE NAME =	DESIGNED - ST	REVISED -
N:\PROJ\3384\2_West\Design\Striping_Signing\DRAWN\signing-details\sheets.dgn	DRAWN - ST	REVISED -
USER NAME = jkjellman	CHECKED - FML	REVISED -
PLOT DATE = 12/6/2010	DATE - 10/2010	REVISED -

LIN ENGINEERING,LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. __ OF __ SHEETS | STA. _____ TO STA. _____

F.A.-RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
80	99-5-Y	WILL	276	118

CONTRACT NO. 60147

FED. ROAD DIST. NO. _ | ILLINOIS | FED. AID PROJECT