SIGN DETAIL

1:75

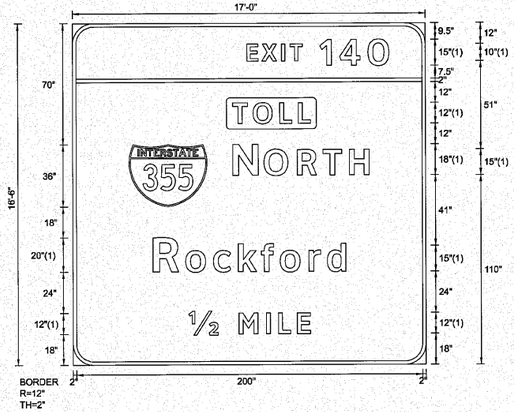

FONT:
(1) ClearviewHwy-5-W

Panel Style: Guide Sign.ssi
M.U.T.C.D.: 2009 Edition

SIGN NUMBER	EB–BS–16; STA. 768+50	
WIDTH x HGHT.	17'–0" x 16'–6"	
BORDER WIDTH	2"	
CORNER RADIUS	12"	
MOUNTING	Ground	
BACKGROUND	TYPE:	Reflective
	COLOR:	Green / Yellow
LEGEND/BORDER	TYPE:	Reflective
	COLOR:	White,Black /White

SYMBOL	ROT	X	Y	WID	HT
M1_1	0	32.6	92	45	36

Panel Style: Guide Sign.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

								LENGTH	SERIES-SIZE
E	X	I	T	1	4	0			ClearviewHwy-5-W
101	109.5	120.9	125.9	143	154.6	170.8		82	10,15
T	O	L	L						ClearviewHwy-5-W
92.6	104.3	119.7	130.6					45	12
N	O	R	T	H					ClearviewHwy-5-W
92.6	110.5	129.8	144.7	160				78.9	18,15
R	o	c	k	f	o	r	d		ClearviewHwy-5-W
46.2	65.1	81.1	95.6	108.8	119.8	136.4	147	111.6	20,15?2.2
12	M	I	L	E					ClearviewHwy-5-W
66.8	95.9	111.6	118.8	129.6				70.4	12

FILE NAME =	DESIGNED - ST	REVISED -
N:\PROJ\3384\2_West\Design\Striping_Signing\DRAWN\signing-details\sheets.dgn	DRAWN - GL	REVISED -
USER NAME = jkjellman	CHECKED - FML	REVISED -
PLOT DATE = 12/6/2010	DATE - 10/2010	REVISED -

LIN ENGINEERING,LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: _N.T.S._ | SHEET NO. __ OF __ SHEETS | STA. _____ TO STA. _____

F.A.-RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
80	99-5-Y	WILL	276	121
		CONTRACT NO. 60I47		
FED. ROAD DIST. NO. _	ILLINOIS	FED. AID PROJECT		