

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

EAST CURB LINE/EAST FACE OF PARAPET

Location	Station	Offset	Theoretical Grade Elevations
N. End of North Appr.	28+38.50	-16.42	768.82
A	28+48.50	-16.42	769.02
B	28+58.50	-16.00	769.23
S. End of North Appr.	28+68.50	-16.00	769.44

EAST EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
N. End of North Appr.	28+38.50	-12.00	768.92
A	28+48.50	-12.00	769.11
B	28+58.50	-12.00	769.31
S. End of North Appr.	28+68.50	-12.00	769.53

⊘ ROADWAY, PROFILE GRADE LINE (P.G.L.) & STAGE CONSTRUCTION LINE


Location	Station	Offset	Theoretical Grade Elevations
N. End of North Appr.	28+38.50	0.00	769.10
A	28+48.50	0.00	769.30
B	28+58.50	0.00	769.50
S. End of North Appr.	28+68.50	0.00	769.71

WEST EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
N. End of North Appr.	28+38.50	12.00	768.92
A	28+48.50	12.00	769.11
B	28+58.50	12.00	769.31
S. End of North Appr.	28+68.50	12.00	769.53

WEST CURB LINE/WEST FACE OF PARAPET

Location	Station	Offset	Theoretical Grade Elevations
N. End of North Appr.	28+38.50	16.42	768.82
A	28+48.50	16.42	769.02
B	28+58.50	16.00	769.23
S. End of North Appr.	28+68.50	16.00	769.44

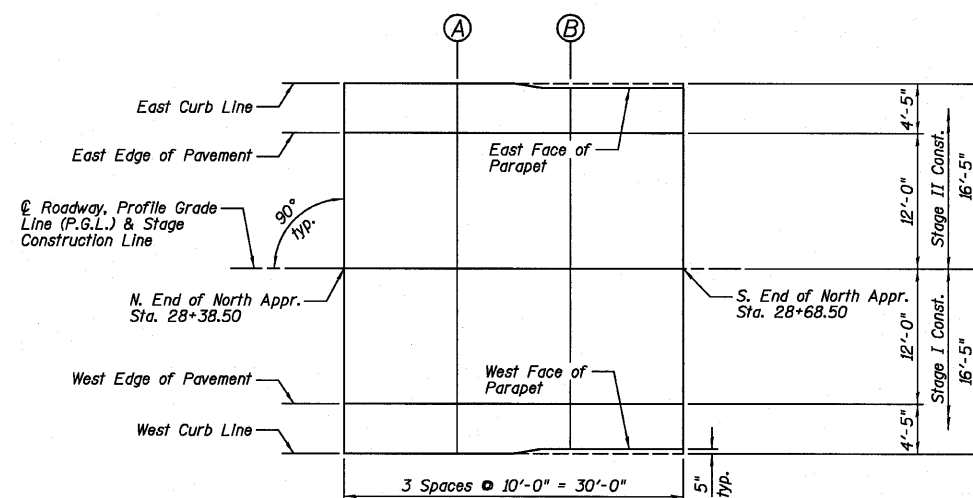

NORTH APPROACH SLAB PLAN

EAST CURB LINE/EAST FACE OF PARAPET

Location	Station	Offset	Theoretical Grade Elevations
N. End of South Appr.	30+13.50	-16.00	773.76
A	30+23.50	-16.00	774.10
B	30+33.50	-16.42	774.43
S. End of South Appr.	30+43.50	-16.42	774.77

EAST EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
N. End of South Appr.	30+13.50	-12.00	773.84
A	30+23.50	-12.00	774.18
B	30+33.50	-12.00	774.52
S. End of South Appr.	30+43.50	-12.00	774.87

⊘ ROADWAY, PROFILE GRADE LINE (P.G.L.) & STAGE CONSTRUCTION LINE


Location	Station	Offset	Theoretical Grade Elevations
N. End of South Appr.	30+13.50	0.00	774.03
A	30+23.50	0.00	774.37
B	30+33.50	0.00	774.71
S. End of South Appr.	30+43.50	0.00	775.05

WEST EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
N. End of South Appr.	30+13.50	12.00	773.84
A	30+23.50	12.00	774.18
B	30+33.50	12.00	774.52
S. End of South Appr.	30+43.50	12.00	774.87

WEST CURB LINE/WEST FACE OF PARAPET

Location	Station	Offset	Theoretical Grade Elevations
N. End of South Appr.	30+13.50	16.00	773.76
A	30+23.50	16.00	774.10
B	30+33.50	16.42	774.43
S. End of South Appr.	30+43.50	16.42	774.77

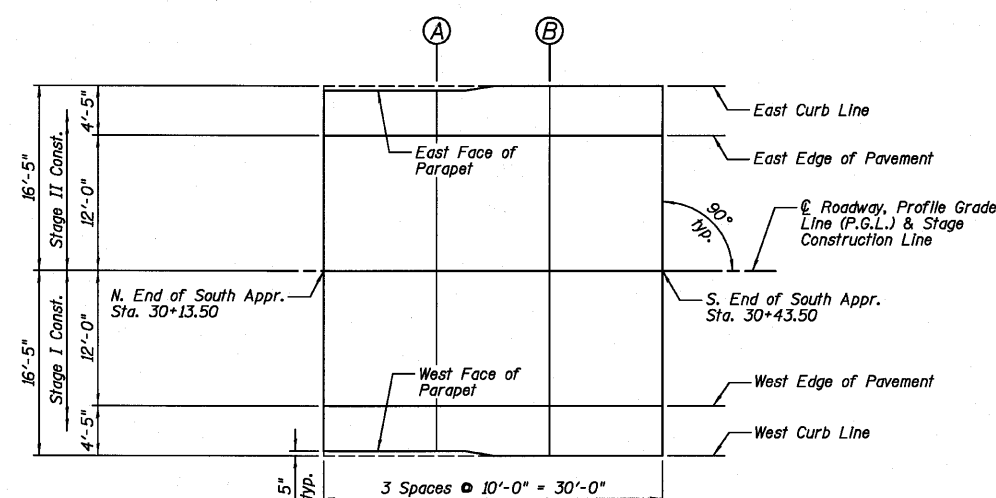

SOUTH APPROACH SLAB PLAN

TOP OF APPROACH
SLAB ELEVATIONS
STRUCTURE NO. 006-0181

DESIGNED	SDH
CHECKED	JML
DRAWN	DJM
CHECKED	MSW

DATE 10/08/10

Farnsworth
GROUP, INC.
2709 McGraw Drive
Bloomington, Illinois 61704
309/663-8435, 309/663-1571 fax

SHEET NO. BR
23 SHEETS

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
698	(101 BR)BR	BUREAU	47	22
CONTRACT NO. 66910				
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		