
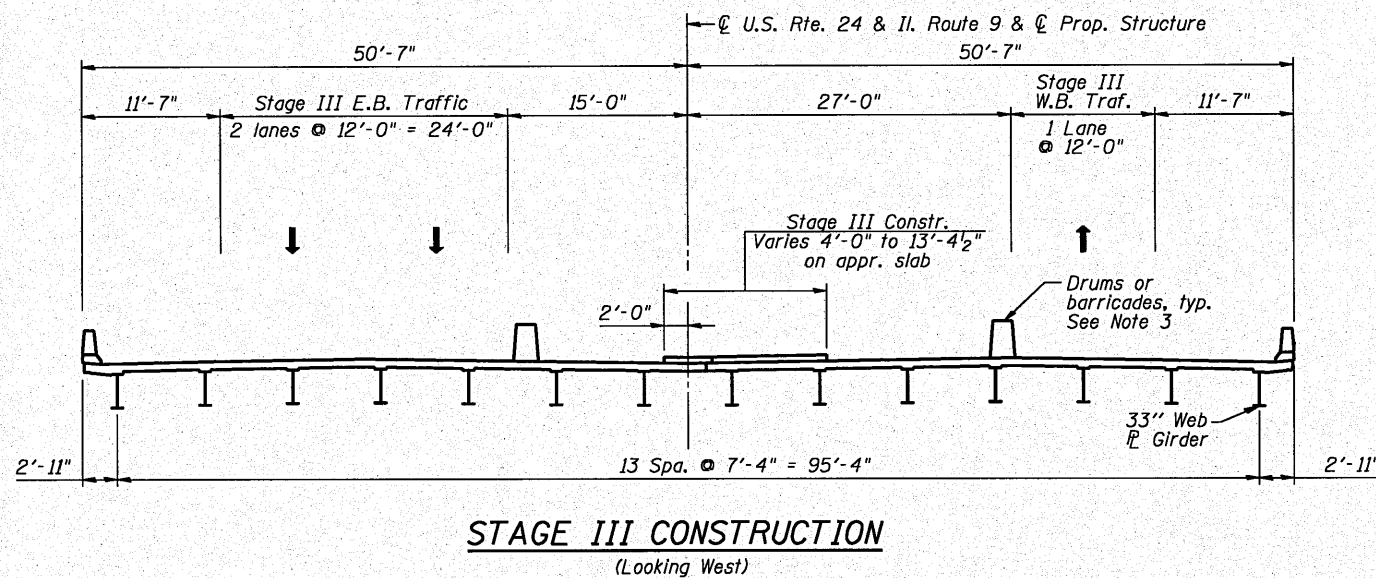
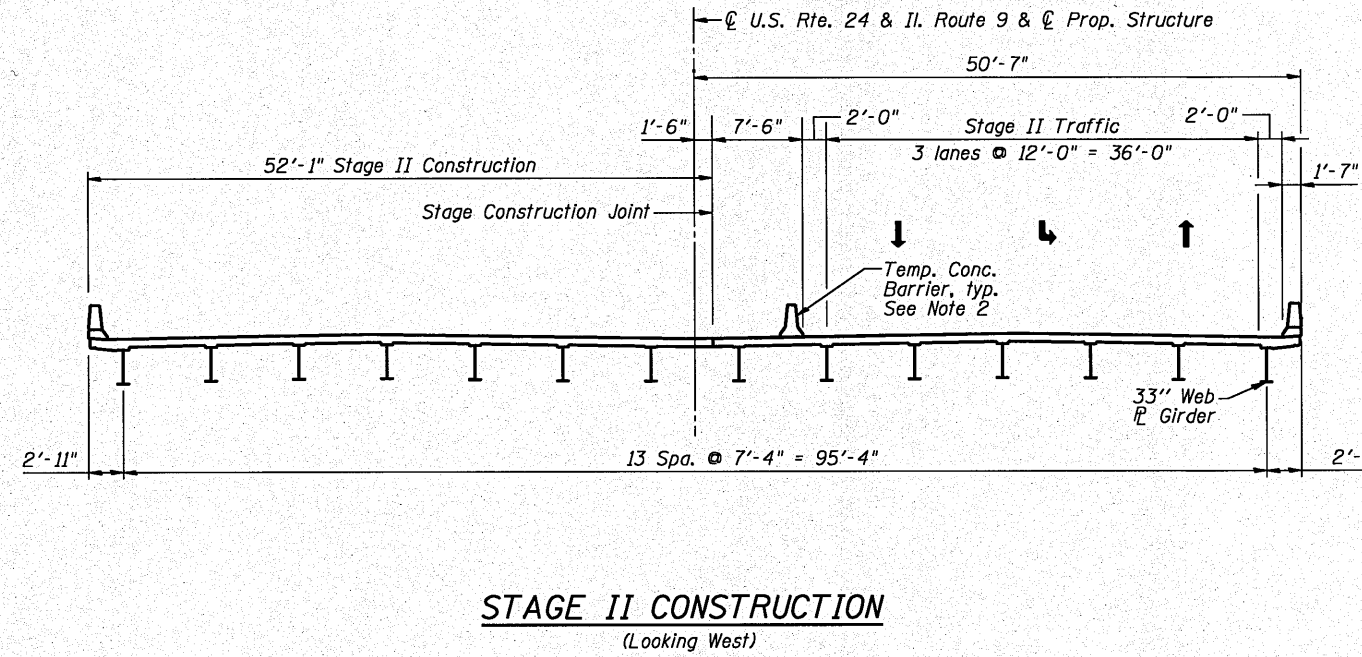
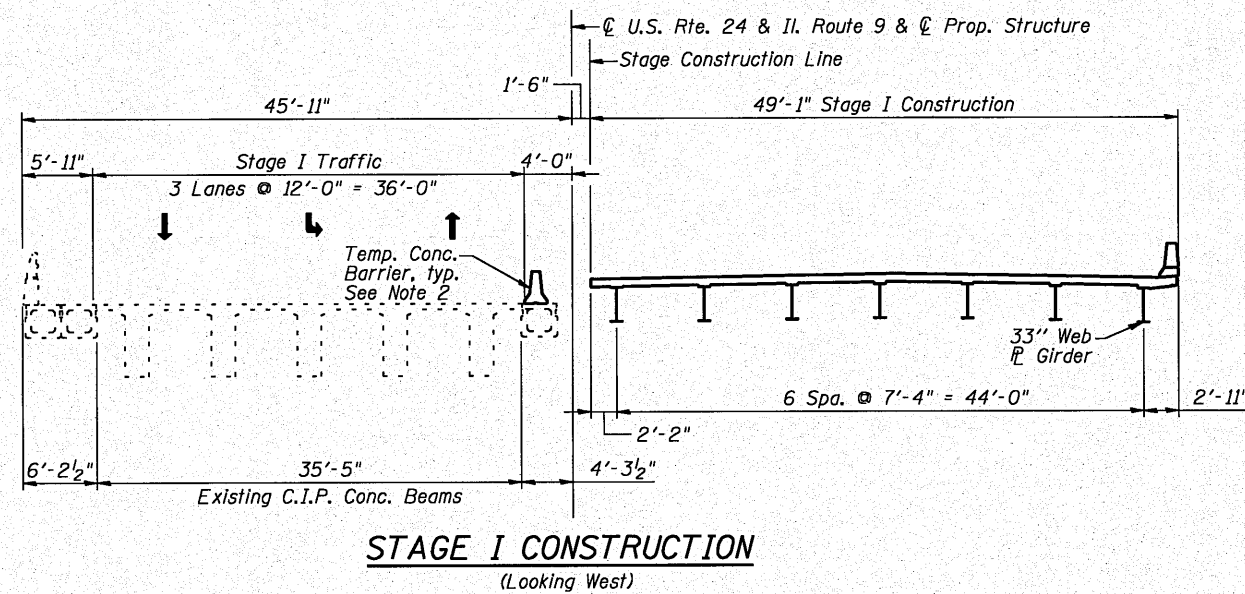
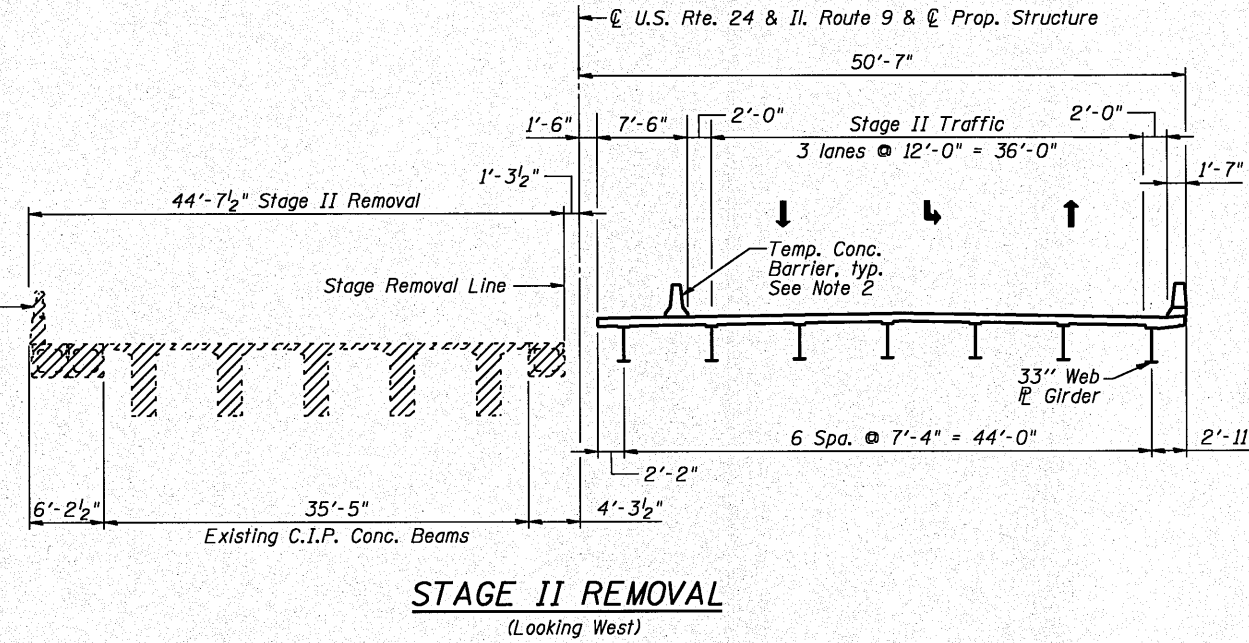


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

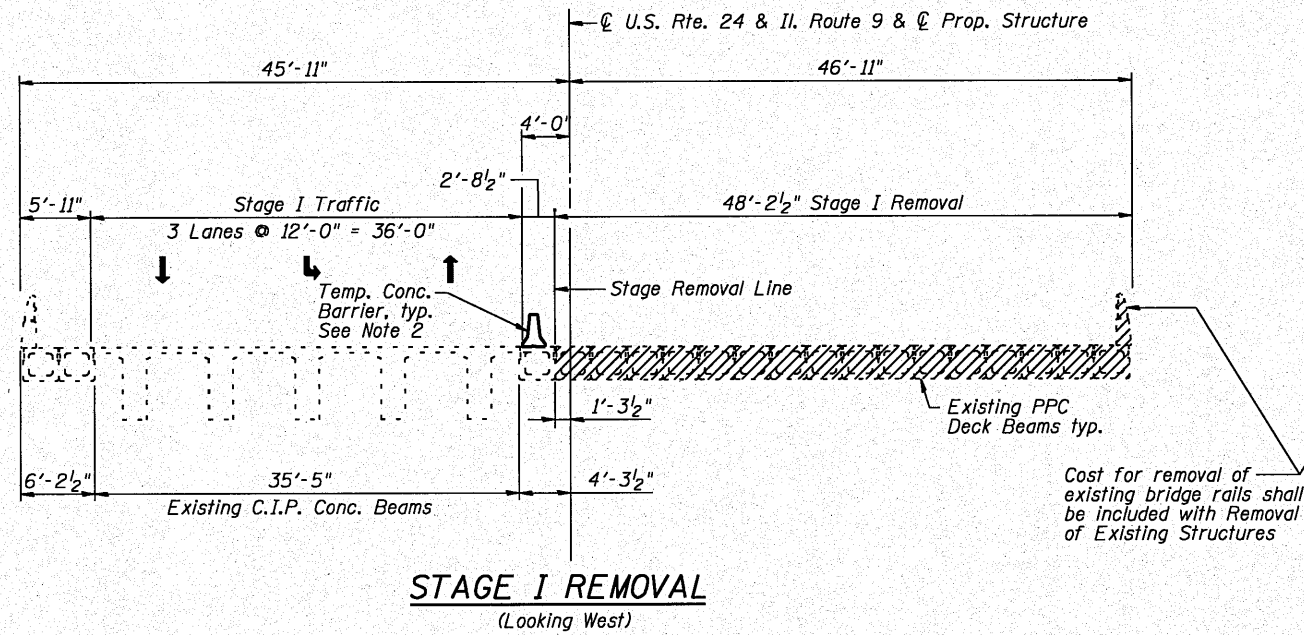

NOTES

1. The Stage Removal and Stage Construction for the bridge approach slab are the same as for the bridge deck.
2. See roadway maintenance of traffic plans for quantity of Temporary Concrete Barrier.
3. Drums or barricades in Stage III according to Highway Standard 701602. See roadway maintenance of traffic plans.

CONSTRUCTION STAGING					
U.S. ROUTE 24 & IL ROUTE 9 OVER LA MARSH CREEK					
STATION 337+89.89					
STRUCTURE NO. 072-0228					
SHEET NO.	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
S3 OF 39 SHEETS	317	45BR-2	PEORIA	122	51
			CONTRACT NO. 68719		
10-15-10		ILLINOIS FED. AID PROJECT			

GRAF 8501 W. Higgins Road, Suite 280
Chicago, Illinois 60631
(773) 399-0112

DESIGNED J.A.Z.
CHECKED J.J.G.
DRAWN S.R.K.
CHECKED J.A.Z.

H:\Jobs\2010\20100304\Acad\dot.s\structural\00\5023\STAGING.dgn
 10/15/2010