SIGN DETAIL

1:75

EB-BM-123
STA. 1151+20

SIGN NUMBER	name	
WIDTH x HGHT.	15'-6" x 8'-0"	
BORDER WIDTH	2"	
CORNER RADIUS	12"	
MOUNTING	Overhead	
BACKGROUND	TYPE:	Reflective
	COLOR:	Green
LEGEND/BORDER	TYPE:	Reflective
	COLOR:	White/White

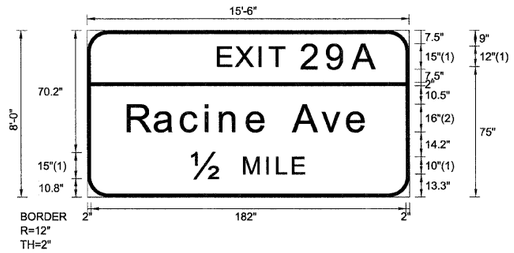

SYMBOL	ROT	X	Y	WID	HT

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)																																					LENGTH	SERIES/SIZE
E	X	I	T	2	9	A																																ClearviewHwy-5-W
75.9	86.2	99.9	105.8	124.4	139.3	154																															92.1	12,15
R	a	c	i	n	e		A	v	e																													ClearviewHwy-5-W-R
23.8	39.2	54.5	68.7	77.1	92.7	104.4	119.2	135.8	150.5																												138.5	16/13
½	M	I	L	E																																		ClearviewHwy-5-W
60.6	90.9	104.1	110	119																																	64.8	15,10

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - SEW	REVISED -
PLOT DATE = $DATE$	DATE - 1/25/10	REVISED -

LIN ENGINEERING,LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 11 OF 46 SHEETS | STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(2525, ETC., 2727) RS-8	COOK	201	119
		CONTRACT NO. 60K11		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		