SIGN DETAIL
1:75

EB-BM-59
STA. 577+80

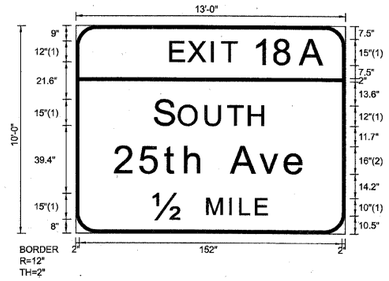

FONT:
(1) ClearviewHwy-5-W
(2) ClearviewHwy-5-W-R

SIGN NUMBER	name
WIDTH x HGHT.	13'-0" x 10'-0"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

								LENGTH	SERIES/SIZE
E	X	I	T	1	8	A			ClearviewHwy-5-W
55.1	65.3	79	84.9	103.6	115.7	130.4		89.3	12,15
S	O	U	T	H					ClearviewHwy-5-W
46.2	60.1	75.5	88.4	100.6				63.5	15,12
2	5	t	h		A	v	e		ClearviewHwy-5-W-R
22.8	37.8	51.8	63.6	74.7	90.2	106.7	121.4	110.4	16/13
½	M	I	L	E					ClearviewHwy-5-W
45.1	76.5	89.6	95.5	104.6				65.8	15,10

FILE NAME =	DESIGNED - SEW	REVISED -	LIN ENGINEERING, LTD. Consulting Engineers Chatham, Illinois Westmont, Illinois	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SIGNING DETAILS
$FILEL$	DRAWN - SEW	REVISED -			
USER NAME = $USER$	CHECKED - FML	REVISED -			
PLOT DATE = $DATE$	DATE - 1/25/10	REVISED -			SCALE: N.T.S. SHEET NO. 9 OF 43 SHEETS STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(3435, ETC., 3838)RS-5	COOK	264	164
		CONTRACT NO. 60G52		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		