SIGN DETAIL

1:75

EB-CL-60
STA. 590+80

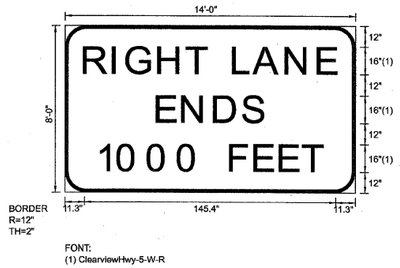

FONT:
(1) ClearviewHwy-5-W-R

SIGN NUMBER	name
WIDTH x HGHT.	14'-0" x 8'-0"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Yellow
LEGEND/BORDER	TYPE: Reflective
	COLOR: Black/Black

SYMBOL	ROT	X	Y	WID	HT

Panel Style: exit_overhead.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)											LENGTH	SERIES-SIZE
R	I	G	H	T		L	A	N	E			ClearviewHwy-5-W-R
11.3	27.8	35.7	54.3	70.3	81.8	97.6	109.4	128	146.6		145.5	16
E	N	D	S									ClearviewHwy-5-W-R
53.5	68.1	86.7	103								61.1	16
1	0	0	0		F	E	E	T				ClearviewHwy-5-W-R
18.9	31	48.5	65.9	78.9	95.8	109.9	124.5	137.6			130.2	16

FILE NAME =	DESIGNED - SEW	REVISED -	LIN ENGINEERING,LTD. Consulting Engineers Chatham, Illinois Westmont, Illinois
$FILE$	DRAWN - SEW	REVISED -	**STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION**
USER NAME = $USER$	CHECKED - FML	REVISED -	**SIGNING DETAILS**
PLOT DATE = $DATE$	DATE - 1/25/10	REVISED -	SCALE: N.T.S. | SHEET NO. 10 OF 43 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(3435, ETC., 3838)RS-5	COOK	264	165
		CONTRACT NO. 60G52		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		