SIGN DETAIL

1:75

EB-TR-61
STA. 600+00

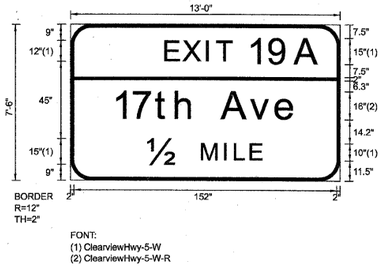

FONT:
(1) ClearviewHwy-5-W
(2) ClearviewHwy-5-W-R

SIGN NUMBER	name
WIDTH x HGHT.	13'-0" x 7'-6"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)																																		LENGTH	SERIES-SIZE
E	X	I	T	1	9	A																													ClearviewHwy-5-W
55.3	65.6	79.2	85.1	103.8	115.8	130.4																												89.1	12,15
1	7	t	h		A	v	e																												ClearviewHwy-5-W-R
25.2	36.2	49.5	61.3	72.4	87.8	104.4	119.1																											105.7	16/13
12	M	I	L	E																															ClearviewHwy-5-W
45.1	76.4	89.6	95.5	104.5																													65.8	15,10

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - FML	REVISED -
PLOT DATE = $DATE$	DATE - 1/25/10	REVISED -

LIN ENGINEERING,LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 14 OF 43 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(3435, ETC., 3838)RS-5	COOK	264	169
		CONTRACT NO. 60G52		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		