SIGN DETAIL

1:75

WB-TR-68
STA. 541+20

SIGN NUMBER	name
WIDTH x HGHT.	14'–6" x 8'–6"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

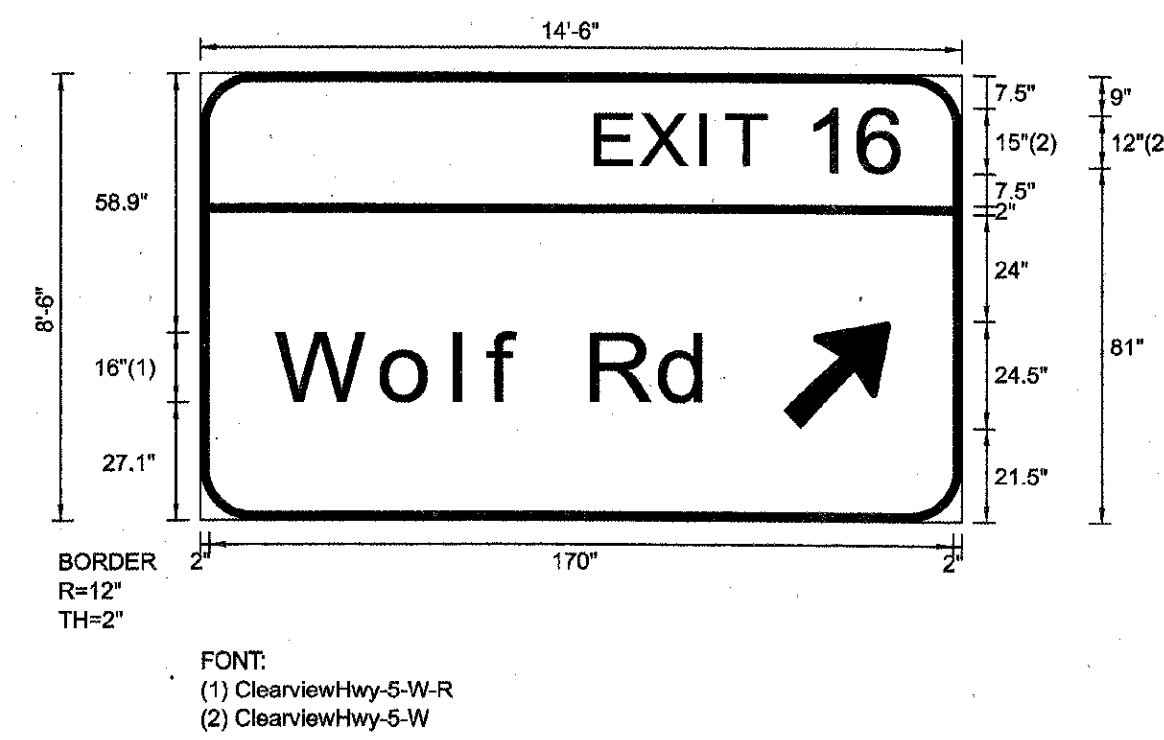

SYMBOL	ROT	X	Y	WID	HT
ARMED	45	133.3	21.5	20	31.5

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

							LENGTH	SERIES/SIZE
E	X	I	T	1	6			ClearviewHwy–5–W
91	101.2	114.9	120.8	139.5	151.6		71.4	12,15
W	o	l	f		R	d		ClearviewHwy–5–W–R
18	42.2	58.9	66.5	74.2	90	105.7	99.3	16/13

FILE NAME =	DESIGNED - SEW	REVISED -	LIN ENGINEERING,LTD. Consulting Engineers Chatham, Illinois Westmont, Illinois
$FILEL$	DRAWN - SEW	REVISED -	
USER NAME = $USER$	CHECKED - FML	REVISED -	
PLOT DATE = $DATE$	DATE - 1/25/10	REVISED -	

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 26 OF 43 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(3435, ETC., 3838)RS-5	COOK	264	181
		CONTRACT NO. 60G52		

FED. ROAD DIST. NO. | ILLINOIS | FED. AID PROJECT