SIGN DETAIL
1:75

WB-BM-71
STA. 565+70

SIGN NUMBER	name
WIDTH x HGHT.	11'-6" x 8'-0"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

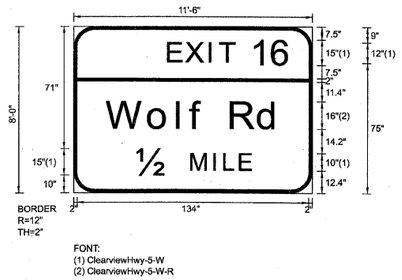

SYMBOL	ROT	X	Y	WID	HT

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

							LENGTH	SERIES/SIZE
E	X	I	T	1	6			ClearviewHwy-5-W
55	65.2	78.9	84.8	103.5	115.6		71.4	12,15
W	o	l	f		R	d		ClearviewHwy-5-W-R
19.4	43.5	60.3	67.9	75.6	91.3	107.1	99.3	16/13
1/2	M	I	L	E				ClearviewHwy-5-W
37	68.3	81.5	87.4	96.4			65.8	15,10

FILE NAME =	DESIGNED - SEW	REVISED -	
$FILEL$	DRAWN - SEW	REVISED -	
USER NAME = $USER$	CHECKED - FML	REVISED -	
PLOT DATE = $DATE$	DATE - 1/25/10	REVISED -	

LIN ENGINEERING,LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 29 OF 43 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(3435, ETC., 3838)RS-5	COOK	264	184
		CONTRACT NO. 60G52		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		