SIGN DETAIL

1:75

WB-TR-82
STA. 624+50

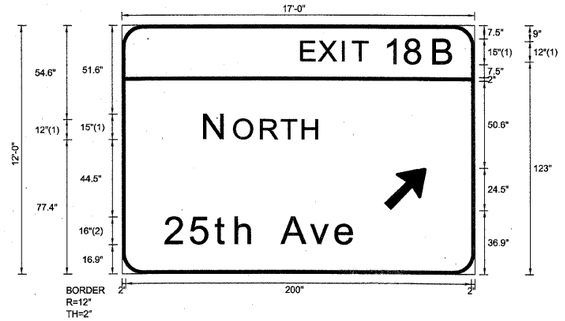

FONT:
(1) ClearviewHwy-5-W
(2) ClearviewHwy-5-W-R

SIGN NUMBER	name	
WIDTH x HGHT.	17'-0" x 12'-0"	
BORDER WIDTH	2"	
CORNER RADIUS	12"	
MOUNTING	Overhead	
BACKGROUND	TYPE:	Reflective
	COLOR:	Green
LEGEND/BORDER	TYPE:	Reflective
	COLOR:	White/White

SYMBOL	ROT	X	Y	WID	HT
ARMED	45	151.6	36.9	20	31.5

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)																																				LENGTH	SERIES-SIZE
E	X	I	T	1	8	B																															ClearviewHwy-5-W
104.1	114.4	128	134	152.6	164.7	181.1																														88.3	12,15
N	O	R	T	H																																	ClearviewHwy-5-W
48.3	65.5	80.9	92.8	105																																65.9	15,12
2	5	t	h		A	v	e																														ClearviewHwy-5-W-R
25.3	40.2	54.3	66.1	77.2	92.6	109.2	123.9																														110.4	1613

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - FML	REVISED -
PLOT DATE = $DATE$	DATE - 1/25/10	REVISED -

LIN ENGINEERING,LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 35 OF 43 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(3435, ETC., 3838)RS-5	COOK	264	190
		CONTRACT NO. 60G52		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		