SIGN DETAIL

1:75

WB-BM-109
STA. 916+90

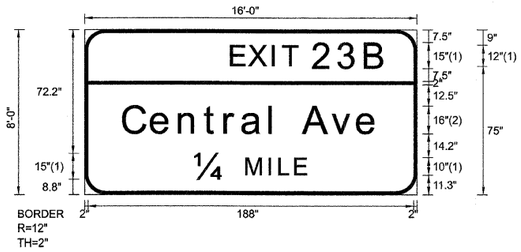

FONT:
(1) ClearviewHwy-5-W
(2) ClearviewHwy-5-W-R

SIGN NUMBER	name
WIDTH x HGHT.	16'-0" x 8'-0"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT

Panel Style: guide_exp_interchange.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)																																				LENGTH	SERIES-SIZE
E	X	I	T	2	3	B																																	ClearviewHwy-5-W
85	95.3	109	114.9	132.5	146.9	162.6																																89	12,15
C	e	n	t	r	a	I		A	v	e																													ClearviewHwy-5-W-R
22.5	38.7	54.9	69.4	81.3	91.3	107.3	112.3	126.5	143.1	157.8																												147.1	16\13
¼	M	I	L	E																																			ClearviewHwy-5-W
63.8	93.8	106.9	112.8	121.9																																64.5	15,10

FILE NAME =	DESIGNED - SEW	REVISED -
⊕FILE1⊕	DRAWN - SEW	REVISED -
USER NAME = ⊕USER⊕	CHECKED - SEW	REVISED -
PLOT DATE = ⊕DATE⊕	DATE - 1/25/10	REVISED -

LIN ENGINEERING,LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 19 OF 34 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(2727, ETC., 3131)RS-7	COOK	216	143
		CONTRACT NO. 60G53		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		