



ALL SIDEWALK CROSSING RAMPS AND DETECTABLE WARNINGS ARE SCHEDULED FOR REPLACEMENT AS PART OF THIS PROJECT.

FOR DETECTABLE WARNING REPLACEMENT, SEE SIDEWALK REMOVAL AND REPLACEMENT SCHEDULE ON SHEET 5.

FINAL LOCATIONS FOR SIDEWALK REPLACEMENT, CURB AND GUTTER REPLACEMENT AND PATCHING WILL BE DETERMINED IN THE FIELD BY THE ENGINEER.

ROADWAY SHALL BE MILLED PRIOR TO PATCHING.

FOR TYPICAL PAVEMENT MARKINGS SEE SHEET 12.

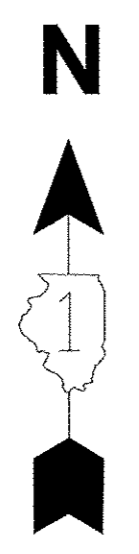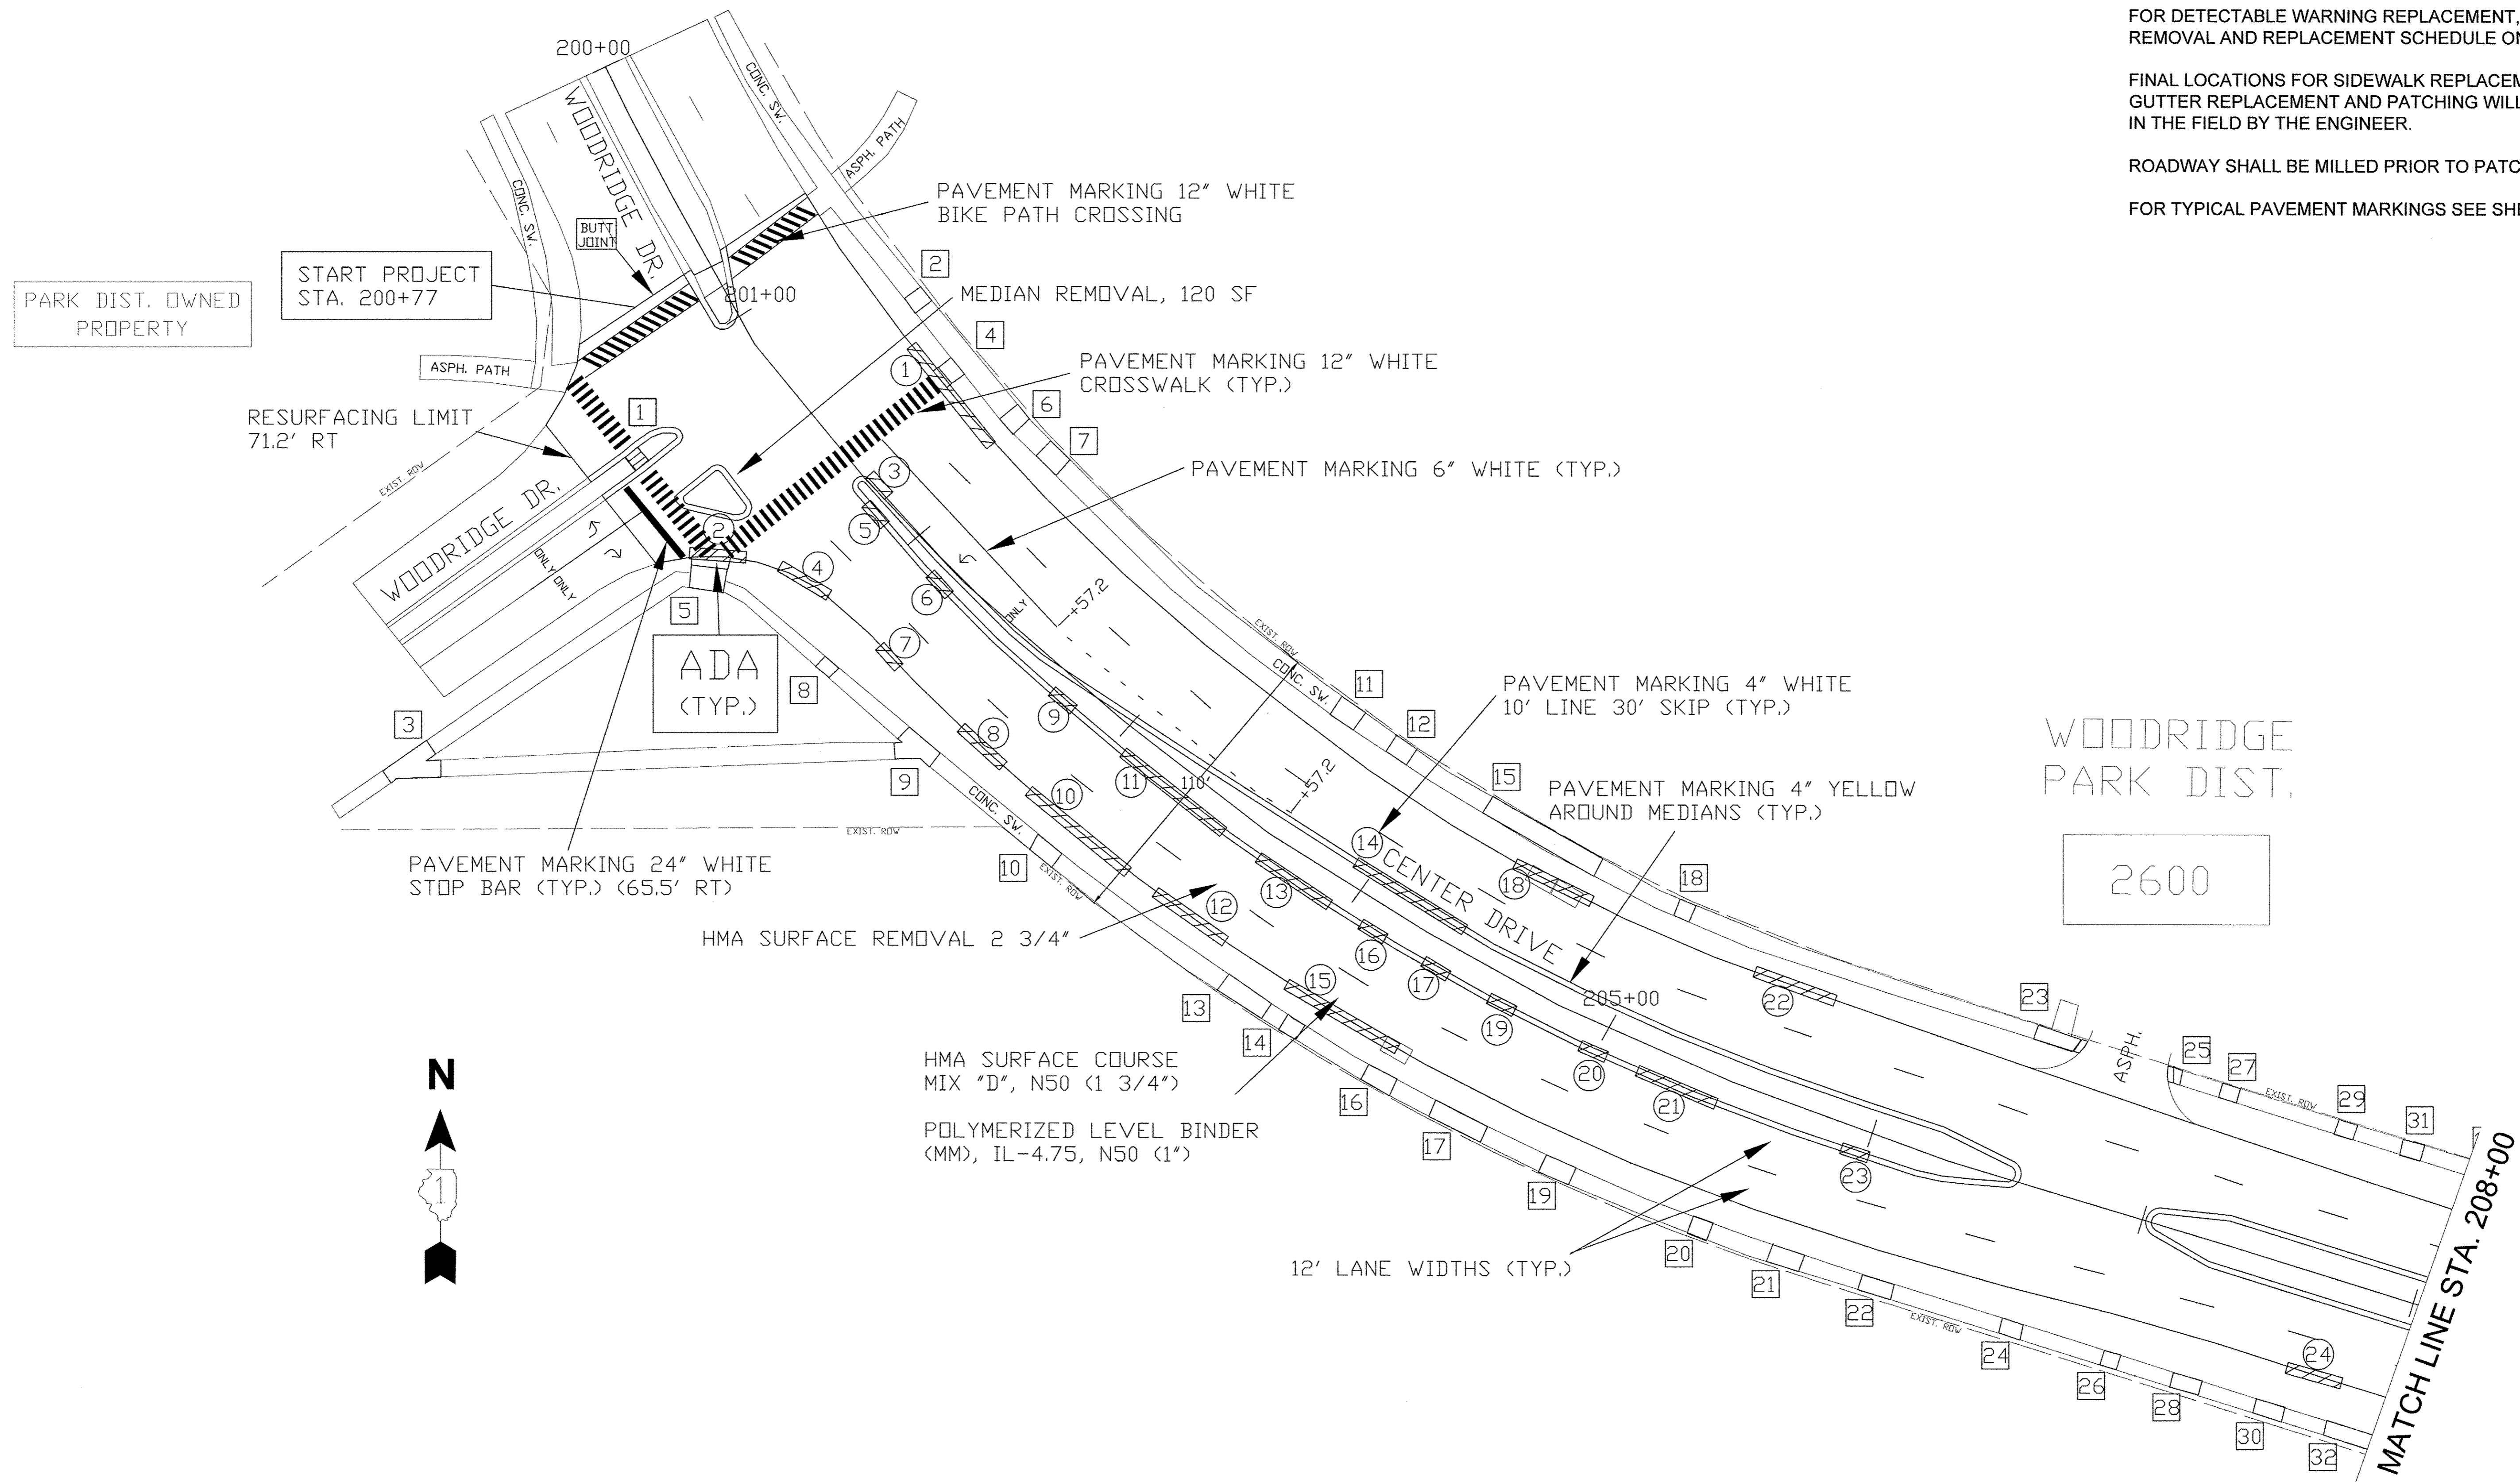

VILLAGE OF WOODRIDGE
DEPARTMENT OF PUBLIC WORKS
1 Plaza Drive, Woodridge IL 60517 (630) 719-4753

DESIGNED - AF	REVISED -
DRAWN - AF	
CHECKED -	
DATE -	

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

RESURFACING PLAN AND
PAVEMENT MARKING PLAN
SCALE: 1"=30' STA. 200+00 TO STA. 208+00

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
3573	11-00068-00-RS	DUPAGE	17	6
ILLINOIS			CONTRACT NO. 63894 FEDERAL AID PROJECT	