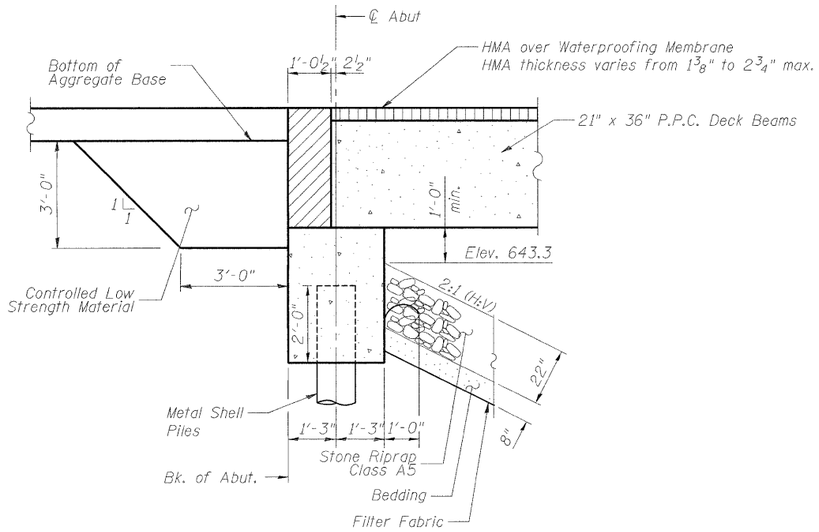

SECTION A-A
SECTION THRU ABUTMENT

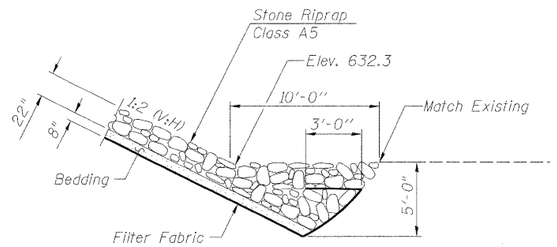

SECTION B-B

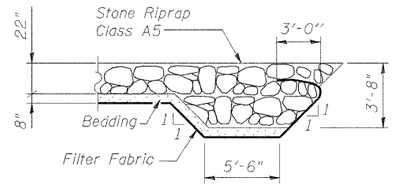

SECTION C-C
FLANK STONE RIPRAP DETAIL

GENERAL NOTES

1. Reinforcement bars shall conform to the requirements of ASTM A 706 Gr 60. See Special Provisions.
2. Reinforcement bars designated (E) shall be epoxy coated.
3. Layout of slope protection system may be varied in the field to suit ground conditions as directed by the Engineer.
4. Protective Coat shall not be applied to surfaces to which Waterproofing Membrane System is applied.
5. The Contractor shall drive test piles to 110% of the nominal required bearing specified in production locations at substructures specified or approved by the Engineer before ordering the remainder of piles.

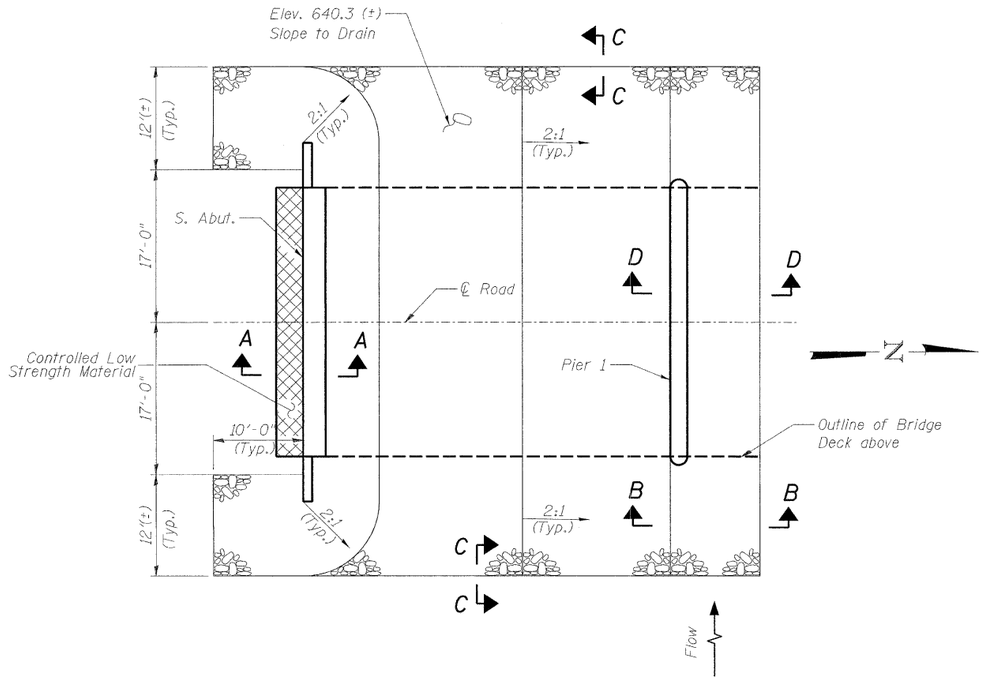

RIPRAP LAYOUT PLAN
(South Abutment shown; North Abutment similar)

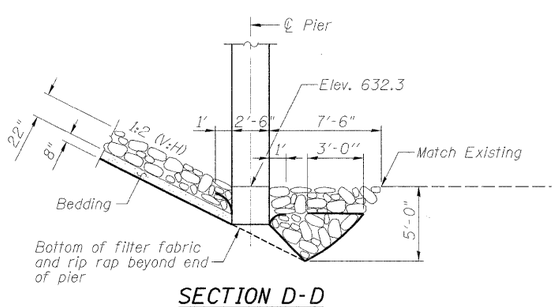

SECTION D-D

GENERAL NOTES AND RIP RAP DETAILS

LYNDON ROAD BRIDGE
OVER ROCK CREEK
F.A.S. ROUTE 76
SECTION 06-00183-00-BR
WHITESIDE COUNTY, ILLINOIS
STRUCTURE NUMBER 098-3077
STATION 223+86.00

LAYOUT	SMK	09/11/09
DRAWN	JDM	12/11/09
REVIEWED	SMK	12/11/09

I:\08\Jobs\08L0156\CADD\Struct\Sheet\S-002-GENDET.dgn
12/10/2009

Corporate License Number 184-001-084

© Copyright Hanson Professional Services Inc. 2009

HANSON

JOB NO.	08L0156
DATE	12/11/09
SHEET NO. 2	11 SHEETS

F.A.S. ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
76	06-00183-00-BR	Whiteside	21	9
		CONTRACT NO. 85506		
FED. ROAD DIST. NO. 2	ILLINOIS	FED. AID PROJECT		