SECTION 22, TOWNSHIP 37, RANGE 13

PLAN
SURVEYED
PLOTTED
ALIGNMENT CHECKED
RT. OF WAY CHECKED
CAD FILE NAME
NOTE BOOK
NO.
BY
DATE

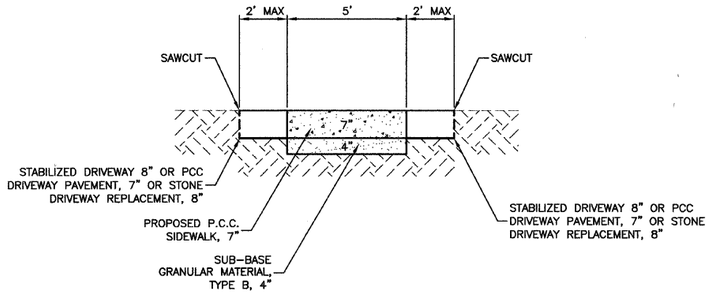

SIDEWALK THROUGH DRIVEWAY

STA. 1+08 TO 26+08

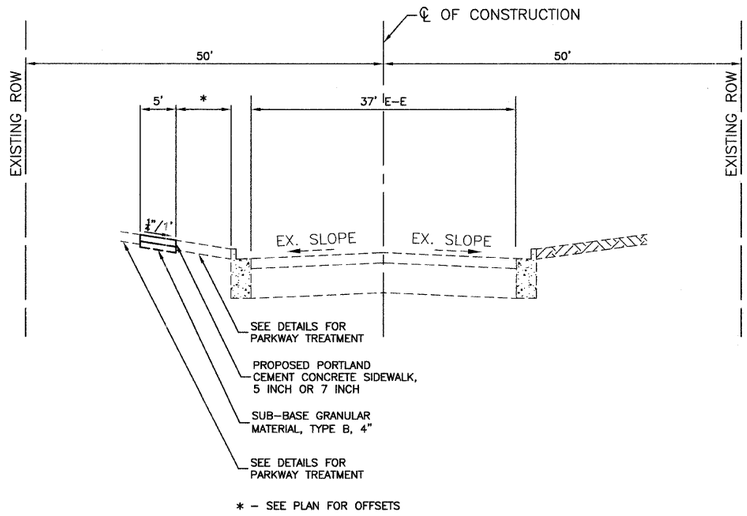

* – SEE PLAN FOR OFFSETS

STA. 1+08 TO 26+08

EXISTING TYPICAL CROSS SECTION

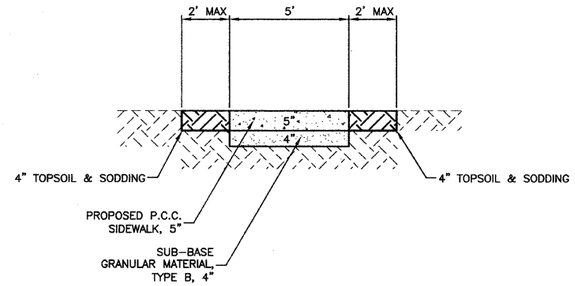

SIDEWALK THROUGH PARKWAY

STA. 1+08 TO 26+08

PROFILE
SURVEYED
PLOTTED
DRAWN CHECKED
B.M. NOTED
NOTE BOOK
BY
DATE

HOT-MIX ASPHALT MIXTURE REQUIREMENTS

ITEM	AC TYPE	VOIDS
DRIVEWAYS		
HOT-MIX ASPHALT SURFCE COURSE, MIX C, N50, (IL 9.5mm) 2"	PG 64-22	4% @ 50 GYR
HMA BASE COURSE (HMA BINDER IL-19mm), 6"	PG 64-22*	4% @ 50 GYR
PATCHING		
CLASS D PATCHES, TYPE I, (HMA BINDER IL-19mm) 5"	PG 64-22*	4% @ 50 GYR
HOT-MIX ASPHALT SURFACE COURSE, MIX C, N50 (IL-9.5mm) 2"	PG 64-22	4% @ 50 GYR

NOTE:
1. THE UNIT WEIGHT USED TO CALCULATE ALL HOT-MIX ASPHALT SURFACE MIXTURE QUANTITIES IS 112 LBS/SY/IN.
2. *WHEN RAP EXCEEDS 20%, THE NEW ASPHALT BINDER IN THE MIX SHALL BE PG 58-22

FILE NAME = 08294_02-TYPX-01 - P01	USER NAME =	DESIGNED — TRL	REVISED —
		CHECKED — TRL	REVISED —
	PLOT SCALE = N/A	DRAWN — MJD	REVISED —
	PLOT DATE = 12-16-08	CHECKED — TRL	REVISED —

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

119TH STREET
TYPICAL CROSS SECTIONS
ALSIP, ILLINOIS

SCALE: N/A | SHEET NO. 3 OF 11 SHEETS | STA. 1+08 | TO STA. 26+08

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1585	08-00085-00-SW	COOK	11	3
		CONTRACT NO. 63109		
FED. ROAD DIST. NO. 1	ILLINOIS	FED. AID PROJECT M-9003 (085)		