EXISTING BEARING REMOVAL DETAIL

Existing Plate to be removed using the air-arc method and grind smooth all weld material remaining on the bottom flange.


Jack and Remove Existing Bearing per special provision "Jack and Remove Existing Bearings." Jack capacity shall be 40 tons per girder.

Burn existing anchor bolts flush with existing concrete surface. Grind existing anchor bolt smooth and seal with epoxy. Cost is incidental to "Jack and Remove Existing Bearings."

INTERIOR GIRDER REACTION TABLE Abut. R Q (k) 48.1 R 4 (k) 37.7 Imp. (k) 8.4 R Total (K) 94.2

 \mathcal{Q} $^{3}_{4}$ " ϕ bolts, $^{7}_{8}$ " ϕ holes in beam flange

 \mathcal{Q}^{3} 4" ϕ studs

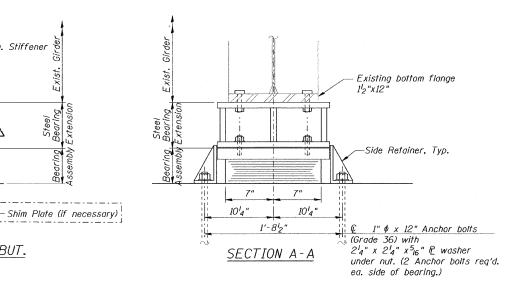


TYPE I ELASTOMERIC EXP. BRG.


3₄" \(\psi \) Threaded Stud with flat washer \(& \) hex. nut. (4 Req'd.) P 134"x 11" x 1'-4" 6 Layers of 7₁₆" 5 - 1₈" Steel Plates 10"

BEARING ASSEMBLY

Shim plates shall not be placed under Bearing Assembly.

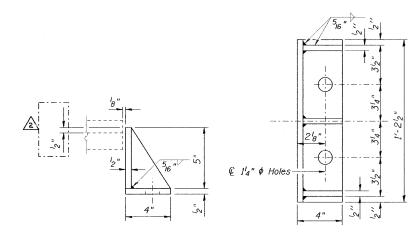

SIDE RETAINER Equivalent rolled angle with stiffeners will be allowed in lieu of welded plates.

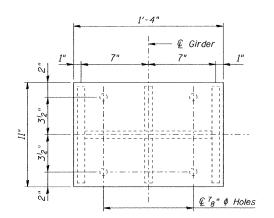


↓ ₽ Brg.

 $A \triangleleft$


ELEVATION AT ABUT.

Exist. Brg. Stiffener

PLAN STEEL BEARING EXTENSION

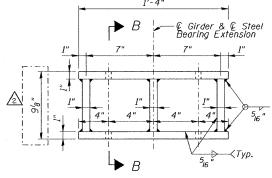

ELEVATION STEEL BEARING EXTENSION



SECTION B-B

Notes:

Anchor bolts shall be ASTM F1554 all-thread (or an Engineer-approved alternate material) of the grade(s) and diameter(s) specified. ASTM A307 Grade C anchor bolts may be used in lieu of ASTM F1554 Grade 36 (Fy=36ksi). The corresponding specified grade of AASHTO M314 anchor bolts may be used in lieu of ASTM F1554.

Drilled and set anchor bolts shall be installed according to Article 521.06 of the Standard Specifications.

Side retainers, shall be included in the cost of Elastomeric Bearing Assembly, Type I.

The structural steel plates of the Bearing Assembly and the Steel Bearing Extension shall conform to the requirements of AASHTO M 270 Grade 36.

Prior to ordering any material, the Contractor shall verify in the field all bearing height and shim thickness dimensions. Diaphragm removal and reinstallation may be required to facilitate drilling holes. Cost included with Furnishing and Erecting Structural Steel.

New Steel extensions, shim plates and connection bolts are included with Furnishing and Erecting Structural Steel.

BILL OF MATERIAL

Item	Unit	Total
Jack and Remove Existing Bearings	Each	8
Elastomeric Bearing Assembly, Type I	Each	8
Anchor Bolts, I"	Each	32
Furnishing and Erecting Structural Steel	Pound	1,520

STEEL BEARING EXTENSION

TYPE I ELASTOMERIC BEARING C.H. 25 (286th STREET) OVER I-88 F.A.I. ROUTE 88 SECTION: BRIDGE DECK REPAIRS 2007-1 ROCK ISLAND COUNTY STATION 2008+40.54 S.N. 081-0126 DATE: 12-09-08

2 2-18-09

DESIGNED S.D.H. E.E.J. CHECKED M.S.M. S.D.H. CHECKED

4014.09\081-0126(CH26_50+h Ave.)\00\081-0126-516.

REVISED