CONTRACT NO. 76408

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
809	(133,134)RS-4,135RS-5	ST. CLAIR, MONROE	252	24
STA. _____		TO STA._____		
FED. ROAD DIST. NO. _	ILLINOIS	FED. AID PROJECT		

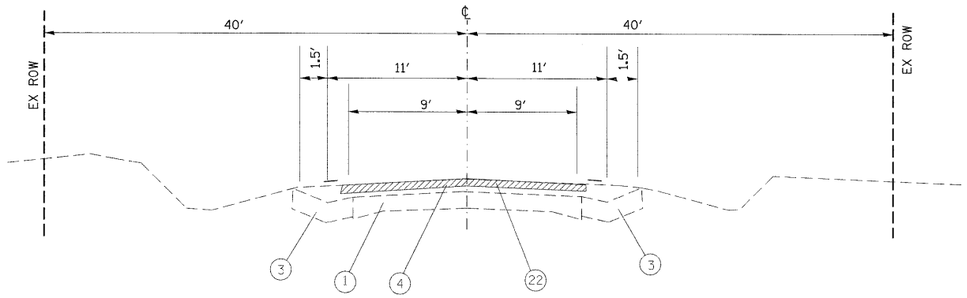

EXISTING IL 158

STA 240+84.99 TO STA 257+46.28

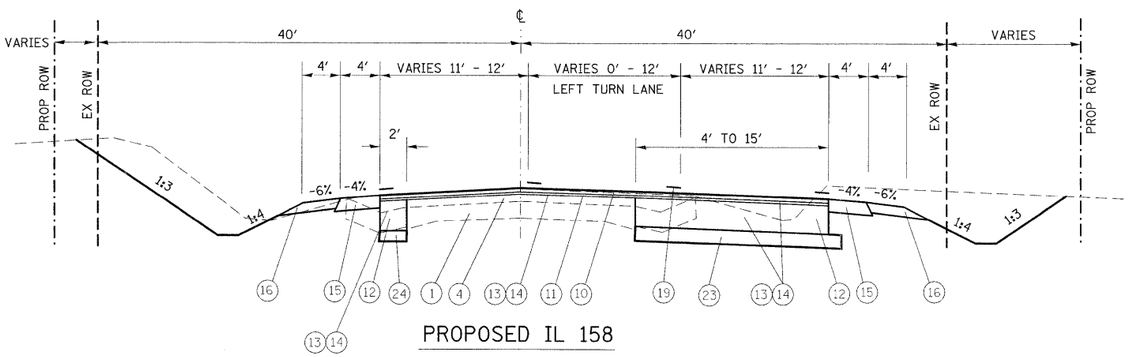

PROPOSED IL 158

STA 240+84.99 TO STA 257+46.28

LEGEND

1. EXISTING PCC PAVEMENT
2. EXISTING PCC WIDENING
3. EXISTING CONC. GUTTER, TYPE A
4. EXISTING BITUMINOUS RESURFACING, 6″ +/-
5. EXISTING BITUMINOUS SHOULDER
6. EXISTING AGGREGATE SHOULDER
7. EXISTING CONC. GUTTER TYPE B
8. EXISTING CONC. CURB, TYPE 4
9. EXISTING PCC SIDEWALK
10. PROPOSED HMA SURFACE COURSE 1 1/2″
11. PROPOSED HMA LEVELING BINDER 3/4″
12. PROPOSED HMA BASE COURSE 11 3/4″
13. PROPOSED AGGREGATE (PRIME COAT)
14. PROPOSED BITUMINOUS (PRIME COAT)
15. PROPOSED HMA SHOULDER 8″
16. PROPOSED AGGREGATE SHOULDER 6″
17. PROPOSED PCC SIDEWALK, 4″
18. PROPOSED CONC. GUTTER, TYPE A
19. PROPOSED THERMOPLASTIC PAVEMENT MARKING
20. PROPOSED CONC. CURB AND GUTTER TYPE B6.24
21. PROPOSED STORM SEWER
22. PROPOSED HMA SURFACE REMOVAL 1 3/4″
23. PROPOSED PROC MODIFIED SOIL (LIME)
24. PROPOSED SUB-BASE GRAN MAT'L, TYPE B 12″

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

IL 158

TYPICAL SECTIONS

FAP ROUTE 809 (IL RTE. 158)
SECTION (133, 134)RS-4, 135RS-5
ST. CLAIR AND MONROE COUNTY

SCALE: VERT. HORIZ.

DRAWN BY

DATE

CHECKED BY

PLOT DATE = 1/7/2009
FILE NAME = c:\pwworking\PWIDOT\KARLASAL\dms51225\pltd81982a.dgn
PLOT SCALE = 50.4167 ' / IN.
REFERENCE = REF