ROUTE NO.	SECTION		COUNTY		SHEET'S	SHEET
F.R.U 5154	04-00343-0	0-BR	W	INNEBAGO	92	66
FED, R	DAD DIST. NO. 7	ILLINO	IS	FED. AID PROJECT-	BRM-50	99(75)

Structural Sheet 20B of 21B

Bar splicer assemblies shall be of an approved type and shall develop in tension at least 125 percent of the yield strength of the lapped reinforcement bars.

Other systems of similar design may be submitted to the Engineer for approval. Approval shall be based on certified test results from an approved testing laboratory that the proposed

Minimum *Pull-out Strength = 0.66 x fy x A_f

Where fy = Yield strength of lapped reinforcement bars in ksi. A, = Tensile stress area of lapped reinforcement bars.

* = 28 day concrete

BAR SPLICER ASSEMBLIES					
		Strength Requirements			
Bar Size to be Spliced	Splicer Rod or Dowel Bar Length		Min. Pull-Out Strength kips - tension		
#4	1'-8''	14.7	7.9		
#5	2'-0''	23.0	12.3		
#6	2'-7''	33.1	17.4		
#7	3′-5′′	45.1	23.8		
#8	4'-6''	58.9	31.3		
#9	5′-9′′	75.0	39.6		
#10	7′-3′′	95.0	50.3		
#11	9'-0''	117.4	61.8		


Splicer rods shall be of minimum 60 ksi yield strength, threaded or coiled full length. All reinforcement bars shall be lapped and tied to the splicer rods or dowel bars. Bar splicer assemblies shall be epoxy coated according to the requirements for reinforcement bars.

bar splicer assembly satisfies the following requirements:

Minimum Capacity = 1.25 x fy x A_t


(Tension in kips)

	BAR SPLIC	ER ASSEMBLI	ES		
		Strength Requirements			
Bar Size to be Spliced	Splicer Rod or Dowel Bar Length		Min. Pull-Out Strength kips - tension		
#4	1'-8''	14.7	7.9		
#5	2'-0''	23.0	12.3		
#6	2'-7"	33.1	17.4		
#7	3′-5′′	45.1	23.8		
#8	4'-6''	58.9	31.3		
#9	5′-9′′	75.0	39.6		
#10	7′-3′′	95.0	50.3		
#11	9'-0''	117.4	61.8		




is the same as the diamete. of the bar spliced.

ROLLED THREAD DOWEL BAR



BAR SPLICER ASSEMBLY ALTERNATIVES

**Heavy Hex Nuts conforming to ASTM A 563, Grade C, D or DH may be used.

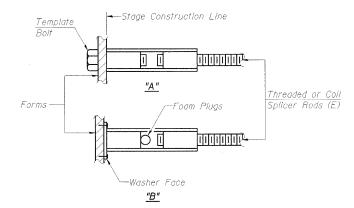


INSTALLATION AND SETTING METHODS


"A": Set bar splicer assembly by means of a template bolt. "B" : Set bar splicer assembly by nailing to wood forms or cementing to steel forms. (E): Indicates epoxy coating.

Bridge Deck Approach Slab Threaded or Coil Threaded or Coil Splicer Rods (E) Loop Couplers (E)

FOR INTEGRAL OR SEMI-INTEGRAL ABUTMENTS

Min.	Capacity	= 23.0	kips -	tensio	n	
Min.	Pull-out	Strength	= 12.	3 kips	-	tensior.

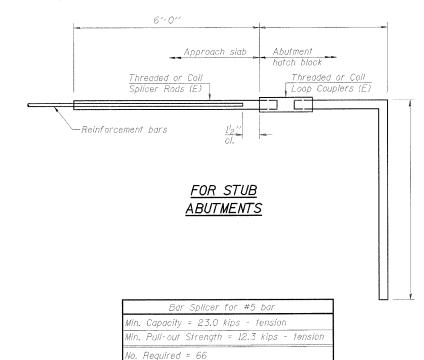

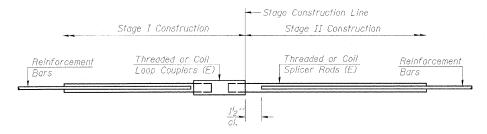

STANDARD

	Bar Size	No. Assemblies Required	Location
		-	

BAR SPLICER ASSEMBLY DETAILS BELTLINE ROAD OVER KISHWAUKEE RIVER FAU ROUTE 5154 SECTION 04-00343-00-BR WINNEBAGO COUNTY STA. 129+89 (S.N. 101-0171)