WEST EDGE OF SIDEWALK

Location	Station	Offset	Theoretical Grade Elevations
S. End of S. Appr.	58+91.91	-23.00	787.38
O	59+01.21	-23.00	787.75
P	59+10.48	-23.00	788.07
N. End of S. Appr.	59+19.75	-23.00	788.34
S. End of N. Appr.	60+80.25	-23.00	785.92
Q	60+90.25	-23.00	785.32
R	61+00.25	-23.00	784.67
N. End of N. Appr.	61+10.25	-23.00	783.97

WEST EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
S. End of S. Appr.	58+91.19	-15.00	787.23
O	59+00.73	-15.00	787.61
P	59+10.24	-15.00	787.93
N. End of S. Appr.	59+19.75	-15.00	788.22
S. End of N. Appr.	60+80.25	-15.00	785.80
Q	60+90.25	-15.00	785.20
R	61+00.25	-15.00	784.55
N. End of N. Appr.	61+10.25	-15.00	783.84

℄ ROADWAY & PROFILE GRADE

Location	Station	Offset	Theoretical Grade Elevations
S. End of S. Appr.	58+89.74	0.00	787.48
O	58+99.76	0.00	787.88
P	59+09.76	0.00	788.23
N. End of S. Appr.	59+19.75	0.00	788.53
S. End of N. Appr.	60+80.25	0.00	786.11
Q	60+90.25	0.00	785.51
R	61+00.25	0.00	784.86
N. End of N. Appr.	61+10.25	0.00	784.16

EAST EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
S. End of S. Appr.	58+88.12	15.00	787.10
O	58+98.69	15.00	787.53
P	59+09.23	15.00	787.90
N. End of S. Appr.	59+19.75	15.00	788.22
S. End of N. Appr.	60+80.25	15.00	785.80
Q	60+90.25	15.00	785.20
R	61+00.25	15.00	784.55
N. End of N. Appr.	61+10.25	15.00	783.84

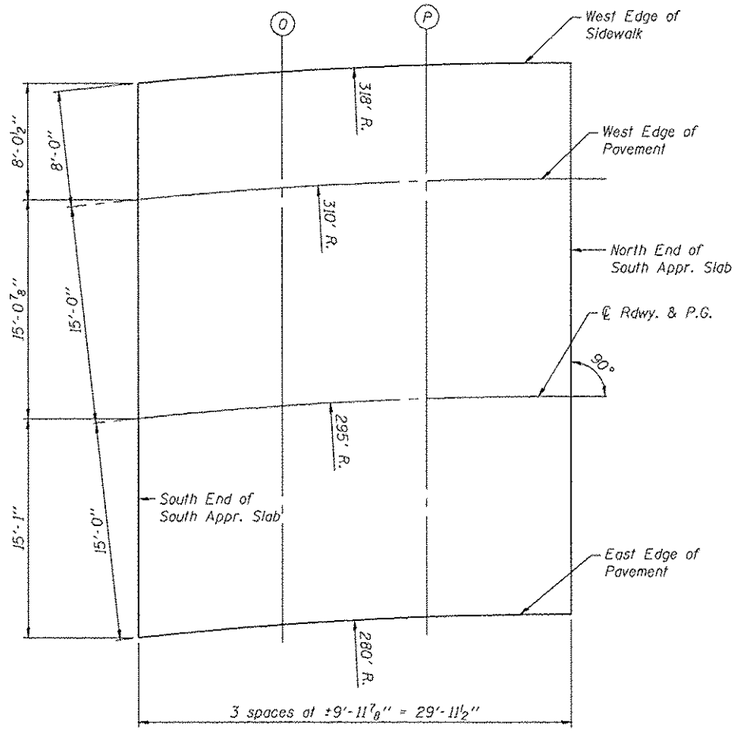

PLAN - SOUTH APPROACH SLAB

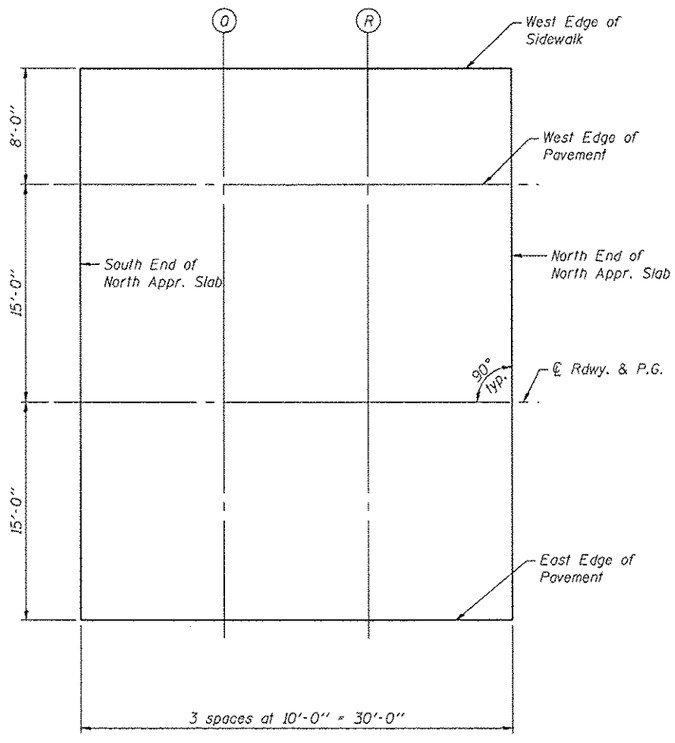

PLAN - NORTH APPROACH SLAB

N

FILE NAME = 0486063-89625-006-Elev-appr.dgn	USER NAME = baswenson	DESIGNED - LVM	REVISED -	CITY OF GALESBURG	TOP OF APPROACH SLAB ELEVATIONS STRUCTURE NO. 048-6063	M.S.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
MAURER-STUTZ ENGINEERS SURVEYORS		CHECKED - BAS	REVISED -			651	07-00651-03-BR	KNOX	67	34
	PLOT SCALE =	DRAWN - SGM	REVISED -					CONTRACT NO. 89625		
	PLOT DATE = 1/3/2013	CHECKED - BAS	REVISED -		SHEET NO. 6 OF 26 SHEETS		ILLINOIS			