
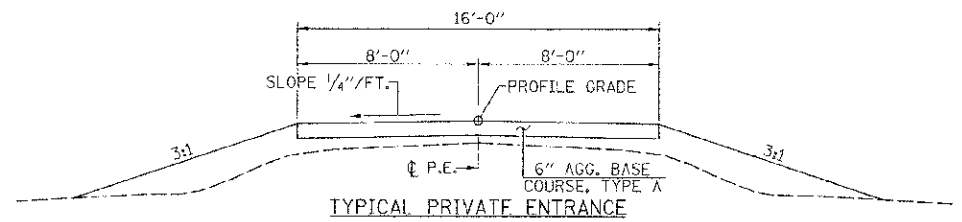


PERIMETER EROSION BARRIER

LOCATION	PERIMETER EROSION BARRIER FOOT
STA. 12+45 40' RT. TO STA. 18+20 40' RT.	555
STA. 18+85 40' RT. TO STA. 22+00 40' RT.	299
STA. 12+45 40' LT. TO STA. 15+50 40' LT.	305
STA. 15+66 40' LT. TO STA. 18+10 40' LT.	244
STA. 18+75 40' LT. TO STA. 22+00 40' LT.	309
TOTAL	1712

AGGREGATE BASE COURSE, TYPE A

LOCATION	AGGREGATE BASE COURSE TYPE A TON
STA. 12+45 TO STA. 22+00	1092
P.E. STA. 15+50 LT.	23
F.E. STA. 19+65 RT.	23
F.E. STA. 19+76 LT.	23
M.B. TURNOUT	5
TOTAL	1166

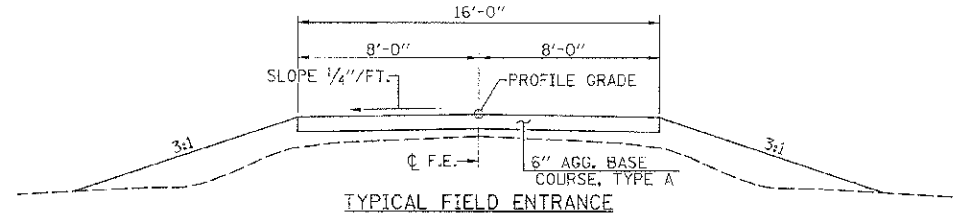

EARTHWORK SCHEDULE

LOCATION	EARTH EXCAVATION	EARTH EXCAVATION ADJUSTED FOR SHRINKAGE	EMBANKMENT	EARTHWORK BALANCE WASTE (+) OR SHORTAGE (-)
	CU. YD.	CU. YD.	CU. YD.	CU. YD.
STA. 12+45 TO STA. 12+50	3	2	0	2
STA. 12+50 TO STA. 13+00	55	41	5	36
STA. 13+00 TO STA. 13+50	44	33	8	25
STA. 13+50 TO STA. 14+00	33	24	13	11
STA. 14+00 TO STA. 14+50	26	20	20	0
STA. 14+50 TO STA. 15+00	26	20	24	-4
STA. 15+00 TO STA. 15+50	26	20	17	3
STA. 15+50 TO STA. 16+00	26	20	11	9
STA. 16+00 TO STA. 16+50	26	20	19	1
STA. 16+50 TO STA. 17+00	29	22	19	3
STA. 17+00 TO STA. 17+50	31	23	35	-12
STA. 17+50 TO STA. 18+00	35	26	47	-21
STA. 18+00 TO STA. 18+19.50	15	11	34	-23
BRIDGE OMISSION - STA. 18+19.50 TO STA. 18+75.50				
STA. 18+75.50 TO STA. 19+00	24	18	36	-18
STA. 19+00 TO STA. 19+50	61	46	66	-20
STA. 19+50 TO STA. 20+00	79	59	48	11
STA. 20+00 TO STA. 20+50	75	56	15	41
STA. 20+50 TO STA. 21+00	50	37	6	31
STA. 21+00 TO STA. 21+50	44	33	6	27
STA. 21+50 TO STA. 22+00	23	17	3	14
TOTAL	731	548	432	116***

PAINT PAVEMENT MARKING - LINE 4"

LOCATION	YELLOW NO PASSING FOOT	WHITE EDGE LINE FOOT
STA. 12+45 TO STA. 22+00	1910	1910
TOTAL	3820	