
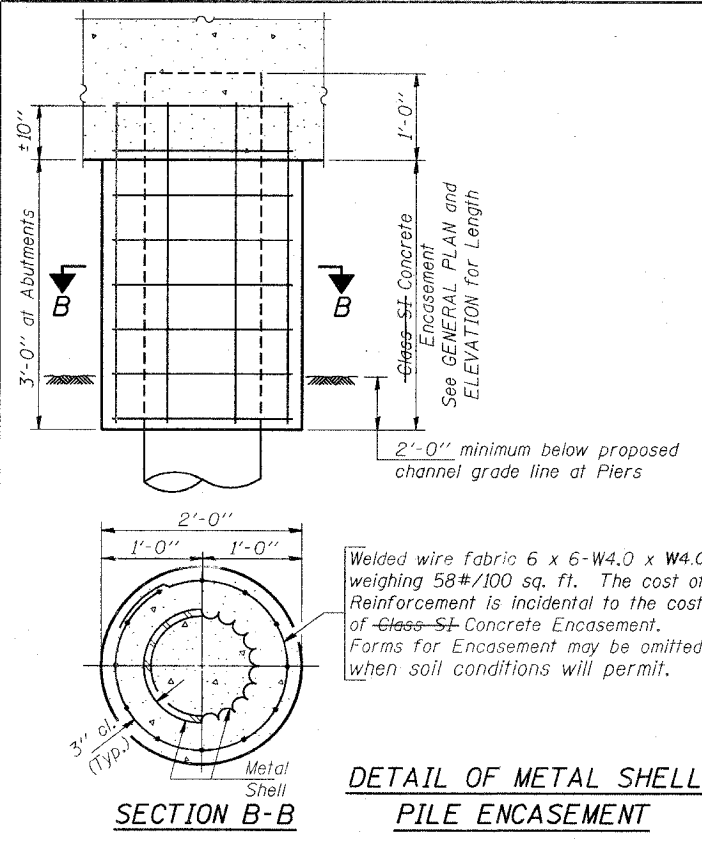
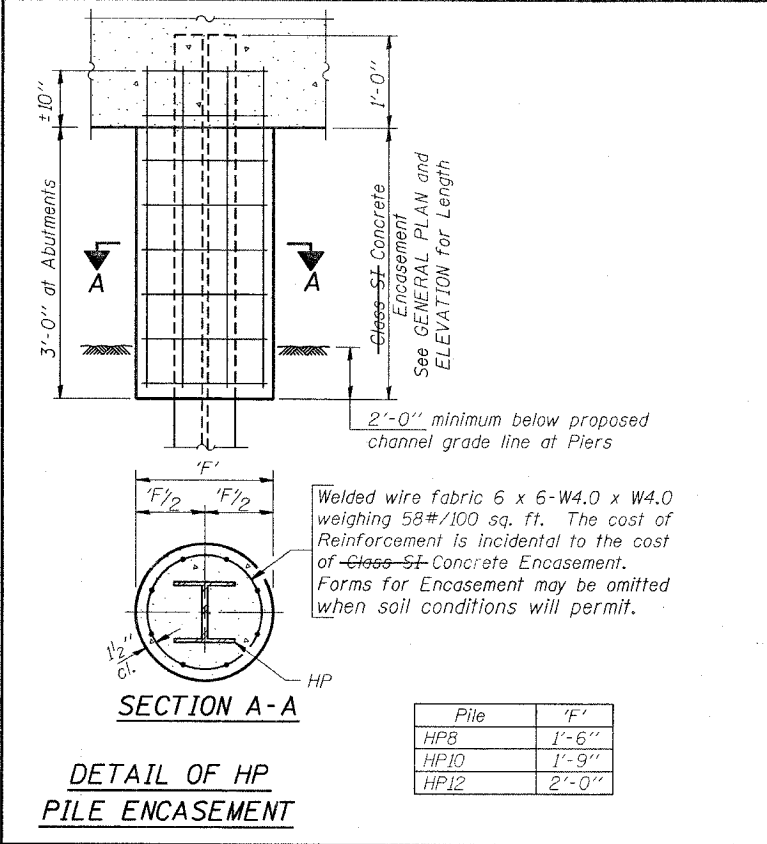
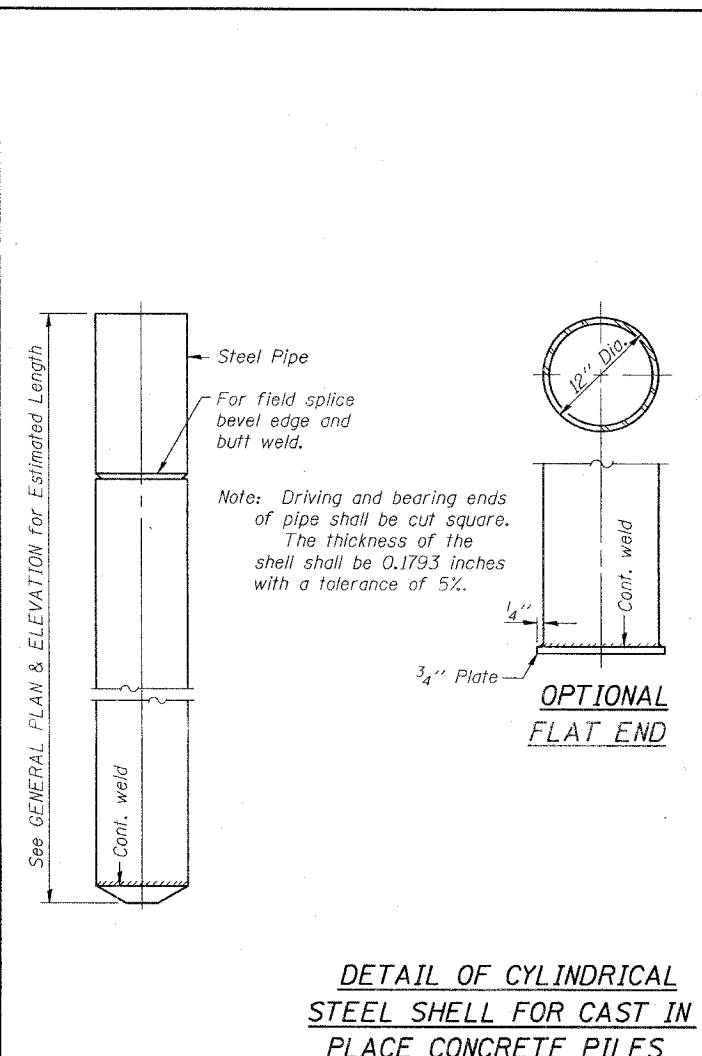
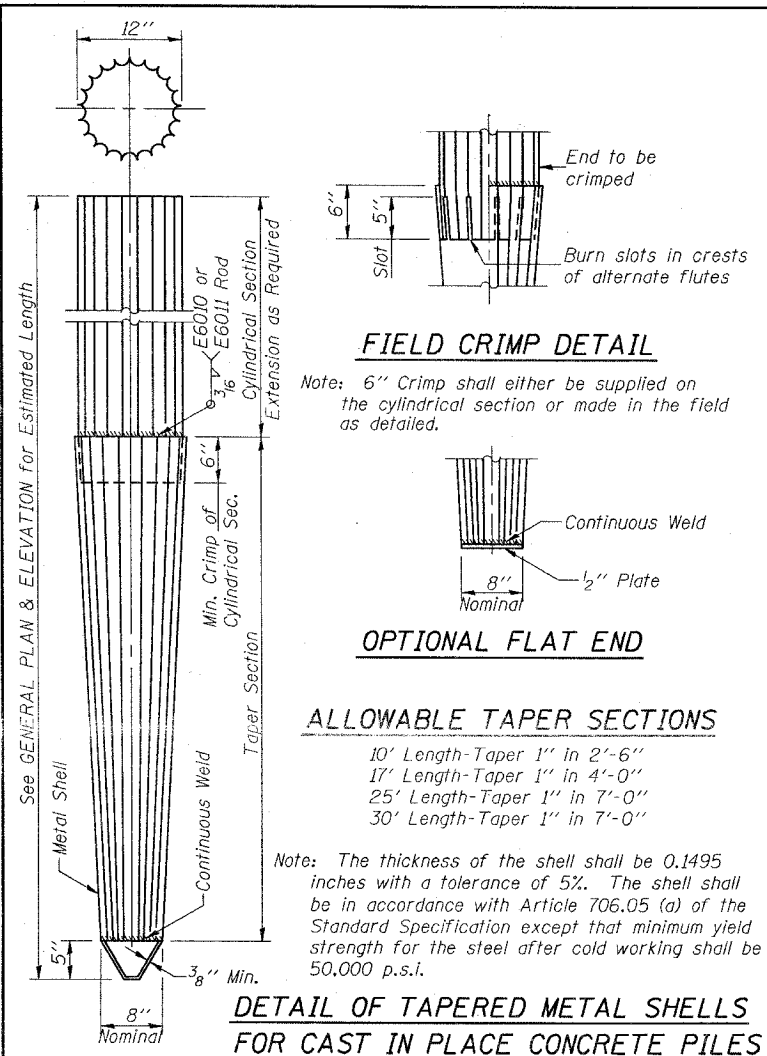


F.A.S. ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET
05-08132-00-02	LAWRENCE		10	10
STA.	TO STA.			
FED. ROAD DIST. NO.	ILLINOIS	PROJECT		

Reinforcement cage shall be omitted when Class II Concrete Encasement is provided.

The cost of Reinforcement is incidental to the Cost of Furnishing Piles.

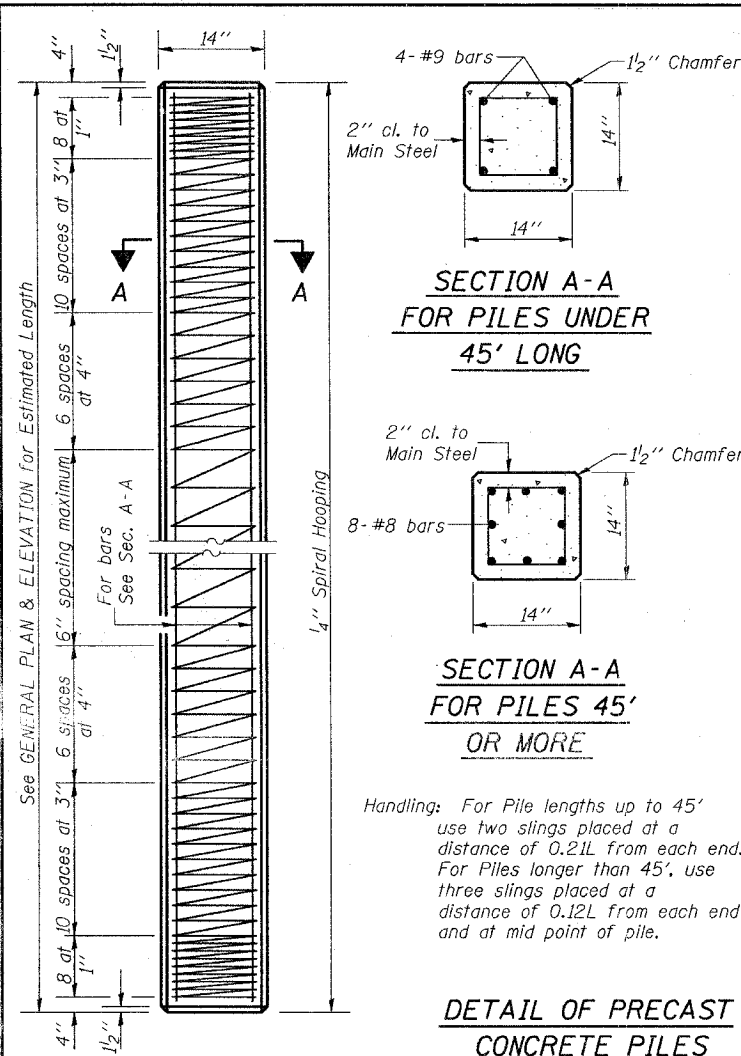

**QUANTITIES/LIN. FT. OF ENCASEMENT (STEEL PILES)**

Pile Size	Item	Quantity
HP8	Class II Concrete Encasement	0.063 C.Y.
HP10	Class II Concrete Encasement	0.086 C.Y.
HP12	Class II Concrete Encasement	0.112 C.Y.

**(METAL SHELL PILES)**

Pile Size	Item	Quantity
12" Dia.	Class II Concrete Encasement	0.087 C.Y.

Illinois Department of Transportation

PASSED November 1, 1995

*Prof. J. Kapa*  
Engineer of Bridge Design

APPROVED November 1, 1995

*Ralph E. Anderson*  
Engineer of Bridges and Structures

IB-H (07/95)

**PILE DETAILS**

**STANDARD CX-1**