


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
332/132	D9 Patch 2022-2	SALINE	5	1
		ILLINOIS	CONTRACT NO. 78890	

D-99-067-21

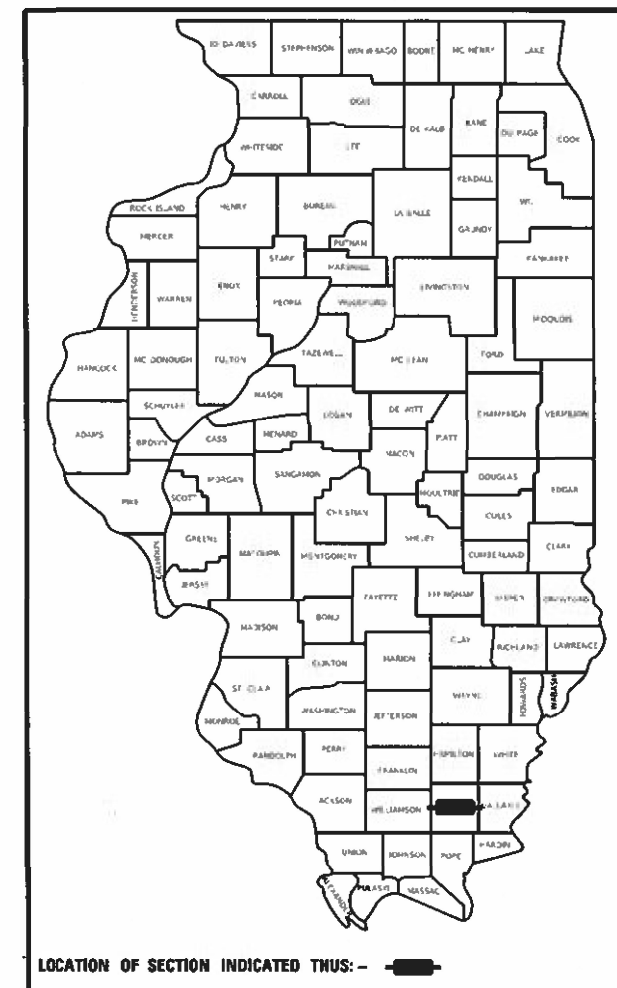

LOCATION OF SECTION INDICATED THUS: -

FOR INDEX OF SHEETS, SEE SHEET NO. 3
FOR SUMMARY OF QUANTITIES, SEE SHEET NO. 4

TRAFFIC DATA


2019 ADT 13,500 WITH 8% TRUCKS
2022 ADT 13,910 WITH 8% TRUCKS

PROPOSED
HIGHWAY PLANS

FAP 332 / FAP 132 (U.S. 45)
SECTION D9 Patch 2022-2
SALINE COUNTY

TOWNSHIPS

HARRISBURG

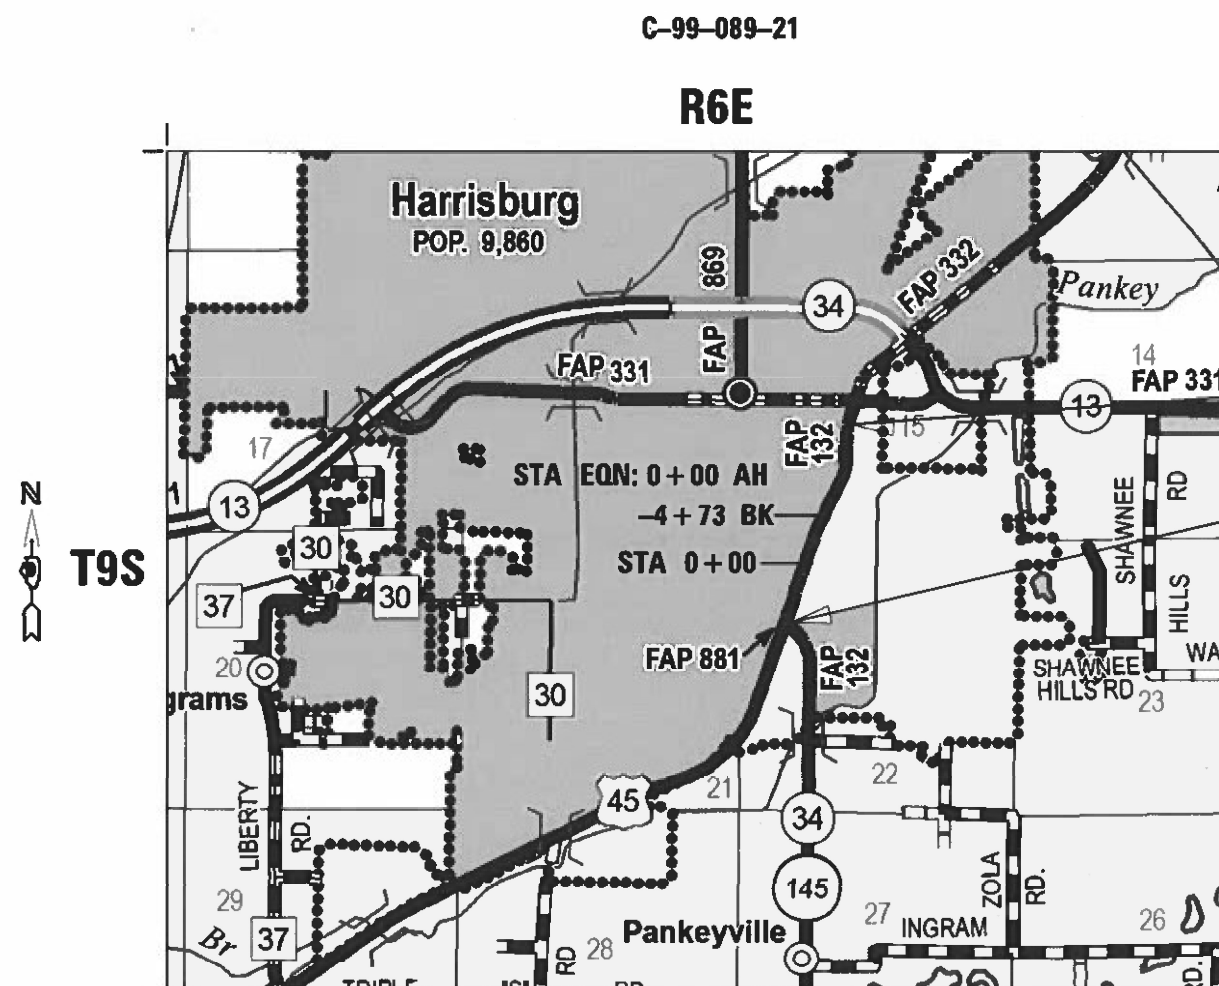

PROJECT ENDS (STA 27+57)
US 45 & IL 13 INTERSECTION
PROJECT BEGINS (STA 12+20)
US 45 & IL 34 /145 INTERSECTION

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATORS
1-800-892-0123
OR 811

PROJECT MANAGER SUSAN POE
PROJECT ENGINEER JOHN BROWN

CONTRACT NO. 78890

GROSS LENGTH = 0.9 MILES
NET LENGTH = 0.9 MILES

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUBMITTED 11-24 2021
[Signature] REGIONAL ENGINEER

February 4, 2022
[Signature] ENGINEER OF DESIGN AND ENVIRONMENT

February 4, 2022
[Signature] DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS

Prepared By: Charles Stein
DISTRICT STUDIES & PLANS ENGINEER

Examined By: Nancy Lee
DISTRICT LAND ACQUISITION ENGINEER

Examined By: Conrad Miller
DISTRICT PROGRAM DEVELOPMENT ENGINEER

Examined By: R. C. O'D
DISTRICT OPERATIONS ENGINEER

Examined By: K. R. G.
DISTRICT PROJECT IMPLEMENTATION ENGINEER

Examined By: Dagmar J. Muehl
DISTRICT CONSTRUCTION ENGINEER

Examined By: R. C. O'D
DISTRICT MATERIALS ENGINEER

NOTES: 1. MODIFIED NAME
FILE NAME: SERIALS

USER NAME - SUSERS	DESIGNED - _____	REVISED - _____
DRAWN - _____	REVISFD - _____	
PLOT SCALE - SSCALES	CHECKED - _____	REVISED - _____
PLOT DATE - SDATES	DATE - _____	REVISED - _____

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

SIGNATURE SHEET

SCALE: _____ SHEET _____ OF _____ SHEETS STA. _____ TO STA. _____

F.A.P. R.I.E.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
332/132	D9 PATCH 2022-2	SALINE	5	2
ILLINOIS FED. AID PROJECT			CONTRACT NO. 78890	

INDEX OF SHEETS

<u>SHEET NO.</u>	<u>DESCRIPTION</u>
1	COVER SHEET
2	SIGNATURE SHEET
3	INDEX OF SHEETS, GENERAL NOTES, AND HIGHWAY STANDARDS
4	SUMMARY OF QUANTITIES
5	PATCHING SCHEDULE

GENERAL NOTES

QUANTITIES SHOWN IN THE PLANS FOR PATCHING ARE ESTIMATES. THE ACTUAL AMOUNT OF PATCHING REQUIRED WILL BE DETERMINED BY THE ENGINEERS.

COMMITMENTS

NO COMMITMENTS.

HIGHWAY STANDARDS

000001-08_STANDARDSYMBOLSABBREVIATIONS&PATTERNS-001
 001001-02_AREASOFREINFREBARS
 001006_DECIMALOFINCH&FOOT
 442101-09_CLASSBPATCHES
 701901-08_TRAFCNTRLDEVICES
 780001-05_TYPICALPVMTMRKINGS
 701101-05_OFFRDOP-MULTILN-LESSTHAN15FTTOEOP
 701106-02_OFFRDOP-MULTILN-MORETHAN15FTAWAY
 701502-09_URBANLNCLOSURE2L2WWITHBIDIRECTLEFTTURNLN
 701602-10_URBANLNCLOSUREMULTILN2WWITHBIDIRECTLEFTTURNLN
 701701-10_URBANLNCLOSUREMULTILNINTERSECTION
 420701-03 PAVEMENT WELDED WIRE MESH

REV. - MS

MODEL NAME: MAMES
FILE NAME: 81115

USER NAME = SUSERS	DESIGNED - _____	REVISED - _____	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	INDEX OF SHEETS, GENERAL NOTES, AND HIGHWAY STANDARDS	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
DRAWN - _____	REVISED - _____	332/132			D9 PATCH 2022-2	SALINE	5	3	
PLOT SCALE = \$SCALE\$	CHECKED - _____	REVISED - _____			CONTRACT NO. 78890				
PLOT DATE = \$DATES\$	DATE - _____	REVISED - _____	SCALE: _____ SHEET ____ OF ____ SHEETS STA. _____ TO STA. _____		ILLINOIS FED. AID PROJECT				

SUMMARY OF QUANTITIES

COUNTY:	SALINE CO
ROUTE:	FAP 332/132
FUNDING:	100% STATE
LOCATION:	URBAN
	ROADWAY
	0006

CODE NUMBER	ITEM DESCRIPTION	UNIT	TOTAL QUANTITY	
44201015	CLASS B PATCHES, TYPE I, 14 INCH	SQ YD	4	4
44201019	CLASS B PATCHES, TYPE II, 14 INCH	SQ YD	75	75
44201023	CLASS B PATCHES, TYPE III, 14 INCH	SQ YD	137	137
44201025	CLASS B PATCHES, TYPE IV, 14 INCH	SQ YD	93	93
44201063	CLASS B PATCHES, TYPE II, 18 INCH	SQ YD	21	21
44201067	CLASS B PATCHES, TYPE III, 18 INCH	SQ YD	19	19
44201069	CLASS B PATCHES, TYPE IV, 18 INCH	SQ YD	67	67
44201299	DOWEL BARS 1 1/2"	EACH	360	360
44213000	PATCHING REINFORCEMENT	SQ YD	316	316
44213200	SAW CUTS	FOOT	1,518	1,518
44213204	TIE BARS 3/4"	EACH	224	224
67100100	MOBILIZATION	L SUM	1	1
70102622	TRAFFIC CONTROL AND PROTECTION, STANDARD 701502	L SUM	1	1
70102632	TRAFFIC CONTROL AND PROTECTION, STANDARD 701602	L SUM	1	1
70102637	TRAFFIC CONTROL AND PROTECTION, STANDARD 701701	EACH	1	1
70107025	CHANGEABLE MESSAGE SIGN	CAL DA	28	28
70200100	NIGHTTIME WORK ZONE LIGHTING	L SUM	1	1

MODEL NUMBER: MAMES
FILE NAME: 332132

USER NAME = SUSERS	DESIGNED - _____	REVISED - _____
	DRAWN - _____	REVISED - _____
PLOT SCALE = 5SCALES	CHECKED - _____	REVISED - _____
PLOT DATE = SDATES	DATE - _____	REVISED - _____

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

SUMMARY OF QUANTITIES

SCALE: _____ SHEET ____ OF ____ SHEETS STA. _____ TO STA. _____

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
332/132	D9 PATCH 2022-2	SALINE	5	4
CONTRACT NO. 78890				
ILLINOIS FED. AID PROJECT				

U.S. 45 / IL 34 PATCHING

LOCATION	STATION	BOUND	WIDTH	LENGTH	CLASS B	CLASS B	CLASS B	SAW CUTS	PATCHING REINF.	DOWEL BARS 1 1/2"	TIE BARS 3/4"
PATCH NO.					PATCHES TYPE II 18 INCH	PATCHES TYPE III 18 INCH	PATCHES TYPE IV 18 INCH				
U.S. 45 / IL 34					SQYD	SQYD	SQYD	FOOT	SQYD	EACH	EACH
1	4+29	NBPL	12	4	5			44		20	
2	3+78	SBDL	12	4	5			44		20	
3	3+78	SBPL	12	4	5			44		20	
4	2+78	SBPL	14	12		19		66	19	20	
5	1+86	SBPL	12	4	5			44		20	
22	0+00	NBPL	12	50			67	136	67	20	35
TOTAL					21	19	67	378	86	120	35

U.S. 45 / IL 34 PATCHING

LOCATION	STATION	BOUND	WIDTH	LENGTH	CLASS B	CLASS B	CLASS B	CLASS B	SAW CUTS	PATCHING REINF.	DOWEL BARS 1 1/2"	TIE BARS 3/4"
PATCH NO.					PATCHES TYPE I 14 INCH	PATCHES TYPE II 14 INCH	PATCHES TYPE III 14 INCH	PATCHES TYPE IV 14 INCH				
U.S. 45 / IL 34					SQYD	SQYD	SQYD	SQYD	FOOT	SQYD	EACH	EACH
6	1+72	SBPL	12	13			17		62	17	20	
7	1+95	SBDL	6	13		9		44		10		
8	2+33	NBDL	12	13			17		62	17	20	
9	2+67	NBDL	12	8		11		52		20		
10	6+86	NBPL	12	8		11		52		20		
11	8+84	NBDL	6	11		7		40		10		
12	10+33	NBDL	12	7		9		50		20		
13	11+17	NBDL	6	22		15		62		10	16	
14	11+95	SBPL	6	6	4			30		10		
15	12+72	NBDL	6	30			20	78	20	10	22	
16	16+33	NBDL	6	35			23	88	23	10	25	
17	17+76	SBPL	6	40			27	98	27	10	28	
18	17+95	NBDL	6	35			23	88	23	10	25	
19	22+13	NBDL	6	30			20	78	20	10	22	
20	23+14	NBDL	6	21		14		60		10	16	
21	27+52	SBPL	12	12			16	60	16	20		
22	0+00	SBPL	12	50			67	136	67	20	35	
TOTAL					4	75	137	93	1140	230	240	189

MODEL NUMBER: MAMT5
FILE NAME: 81215

USER NAME = SUSERS	DESIGNED - _____	REVISED - _____	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	PATCHING SCHEDULES				F.A.P. RTE. 332/132	SECTION D9 PATCH 2022-2	COUNTY SALINE	TOTAL SHEETS 5	SHEET NO. 5
PLOT SCALE = 5SCALES	CHECKED - _____	REVISED - _____		SCALE: _____ SHEET ____ OF ____ SHEETS STA. _____ TO STA. _____				CONTRACT NO. 78890				
PLOT DATE = SDATES	DATE - _____	REVISED - _____		ILLINOIS FED. AID PROJECT								