


SUMMARY OF QUANTITIES				TOTAL QUANTITY (1000-2A)
CODE NO.	ITEM DESCRIPTION	UNIT		
40600100	BITUMINOUS MATERIALS (PRIME COAT)	GALLON		6,964
40600300	AGGREGATE PRIME COAT	TON		65
40600635	LEVELING BINDER (MACHINE METHOD), N70	TON		500
40600895	CONSTRUCTING TEST STRIP	EACH		2
40603085	HOT-MIX ASPHALT BINDER COURSE, IL-19.0, N70	TON		6,438
40603340	HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N70	TON		3,656
44000196	HOT-MIX ASPHALT SURFACE REMOVAL, SPECIAL	SQ YD		43,528
44201723	CLASS D PATCHES, TYPE IV, 6 INCH	SQ YD		250
67100100	MOBILIZATION	L SUM		1
70101700	TRAFFIC CONTROL & PROTECTION	L SUM		1
* 78000200	THERMOPLASTIC PAVEMENT MARKING - LINE 4"	FOOT		42,708
X7030200	SHORT-TERM PAVEMENT MARKING (SPECIAL)	FOOT		11,482
XX002870	AGGREGATE SHOULDERS, TYPE B (SPECIAL)	SQ YD		10,525
* XX006257	RECESSED REFLECTIVE PAVEMENT MARKER	EACH		307
Δ Z0076600	TRAINEES	HOUR		500
XX001813	ROAD CORING (SPECIAL)	FOOT		31,576

\* SPECIALTY ITEMS

Δ 1080

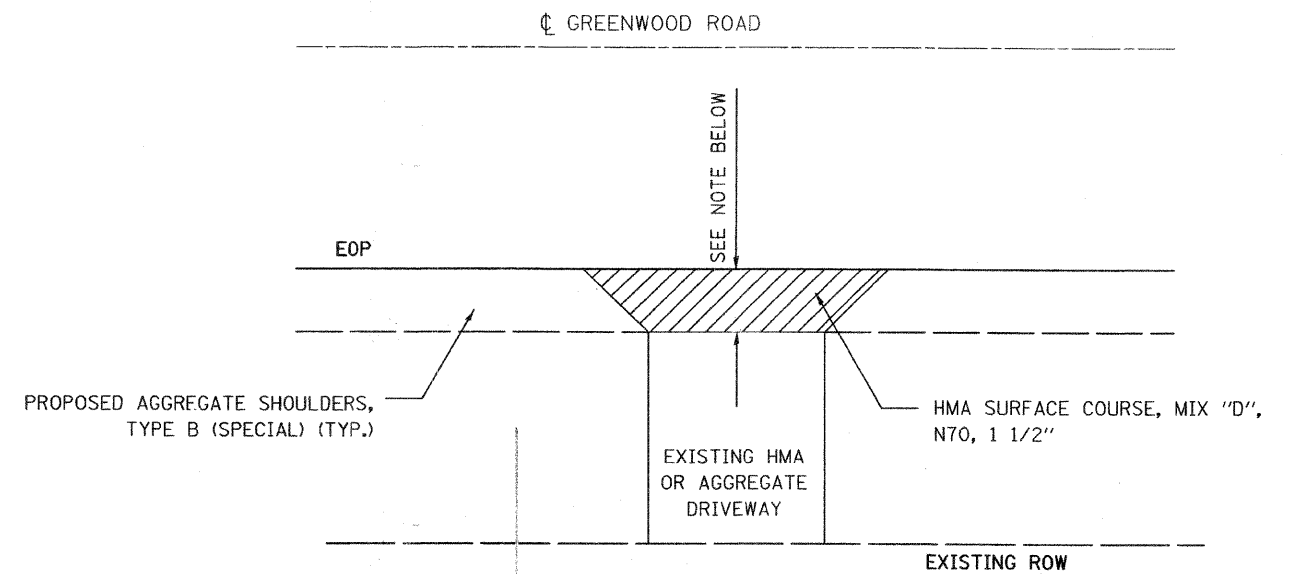

**DRIVEWAY DETAIL**

**NOTE:** 3' MAX. WHEN MATCHING EXISTING DRIVEWAY OR WHATEVER DIMENSION IS NECESSARY TO CREATE AND MAINTAIN A SATISFACTORY RIDING CONDITION. VARIABLE DIMENSIONS ARE SUBJECT TO ENGINEER APPROVAL.

FILE NAME =	USER NAME = #USER#	DESIGNED -	REVISED -	<b>McHENRY COUNTY DIVISION OF TRANSPORTATION GREENWOOD ROAD LAPP IMPROVEMENT</b>	<b>SUMMARY OF QUANTITIES AND DRIVEWAY DETAIL</b>	F.A.S. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
#FILE#		DRAWN -	REVISED -			25	09-00361-00-RS	McHENRY	14	3	
		CHECKED -	REVISED -			CONTRACT NO. 63131					
		DATE -	REVISED -			SCALE:	SHEET NO.	OF	SHEETS	STA.	TO STA.