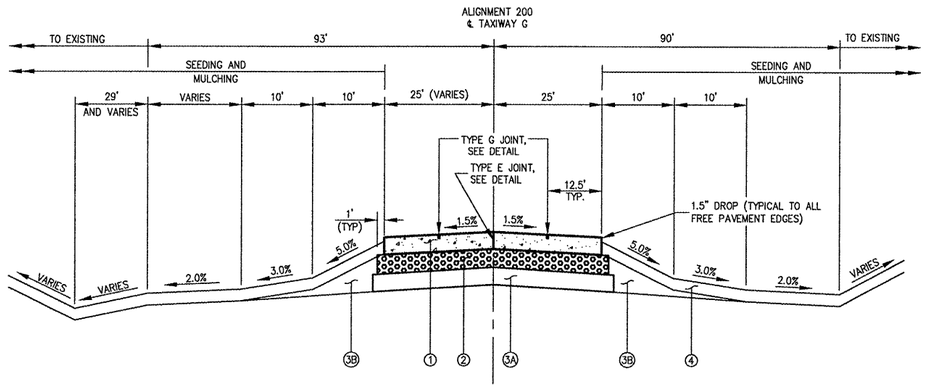

TYPICAL SECTION - TAXIWAY G

(SECTION SHOWN LOOKING NORTH)

① PROPOSED 10 INCH PCC PAVEMENT, ITEM AR501510

② PROPOSED 6 INCH CRUSHED AGGREGATE BASE COURSE, ITEM AR209606

③ PROPOSED PREPARED SUBGRADE:
- A. SUBGARDE PREARATION WITHIN 5 FEET OF PROPOSED PAVEMENT EDGE.
- B. FILL OUTSIDE THESE AREAS MAY BE NON-STRUCTURAL FILL.
  CUT AREAS – REMOVE TOPSOIL AND CLAY TO FINISHED SUBGRADE ELEV.
  FILL AREAS – REMOVE TOPSOIL AND PLACE CLAY FILL TO FINISHED SUBGARDE ELEVATION.

④ PROPOSED 4 INCH TOPSOIL IN SEEDING AND MULCHING AREAS, ITEM AR905510

NOTES:

1. FOR ADDITIONAL INFORMATION AND VARIATIONS ON TYPICAL JOINTING, SEE JOINTING PLAN AND DETAILS.
2. FOR ADDITIONAL LANDSCAPING INFORMATION, SEE LANDSCAPING PLAN.

I:\08JOBS\0840\08A0122\DRAWINGS\SHEETS\05-TYP XSEC.DWG FEB 27, 2009 11:01AM RAUSMO0682

LE040

HANSON

HANSON PROFESSIONAL SERVICES INC.

815 Commerce Drive, Suite 200
Oak Brook, Illinois 60523
Telephone: 630.990.3800
Fax: 630.990.3801

Illinois Professional Design Firm
Registration No. 184-001084

© Copyright Hanson Professional Service Inc. 2008

Chicago-Romeoville Airport

JOLIET REGIONAL PORT DISTRICT

1 George Michas Drive
Romeoville, Illinois 60446
Telephone: 815.838.9497
Fax: 815.838.9524

COMPLETE TAXIWAY G

AIP PROJECT NO. 3-17-0140-B43
IDA PROJECT NO. LOT-3883

No.	Drawing Issue Description	Date	By

Date

JANUARY 30, 2009

Sheet Title

TYPICAL SECTIONS

08A0122
Project Number

LDH 06/18/08
Layout By Date

LDH 06/18/08
Designed By Date

RMH 01/30/09
Reviewed By Date

Drawn By

5
Sheet No.