


DATE _____
 BY _____
 SURVEYED _____
 PLOTTED _____
 NOTE BOOK _____
 NO. _____
 AREAS CHECKED _____



DATE _____
 BY _____
 SURVEYED _____
 PLOTTED _____
 NOTE BOOK _____
 NO. _____
 AREAS CHECKED _____

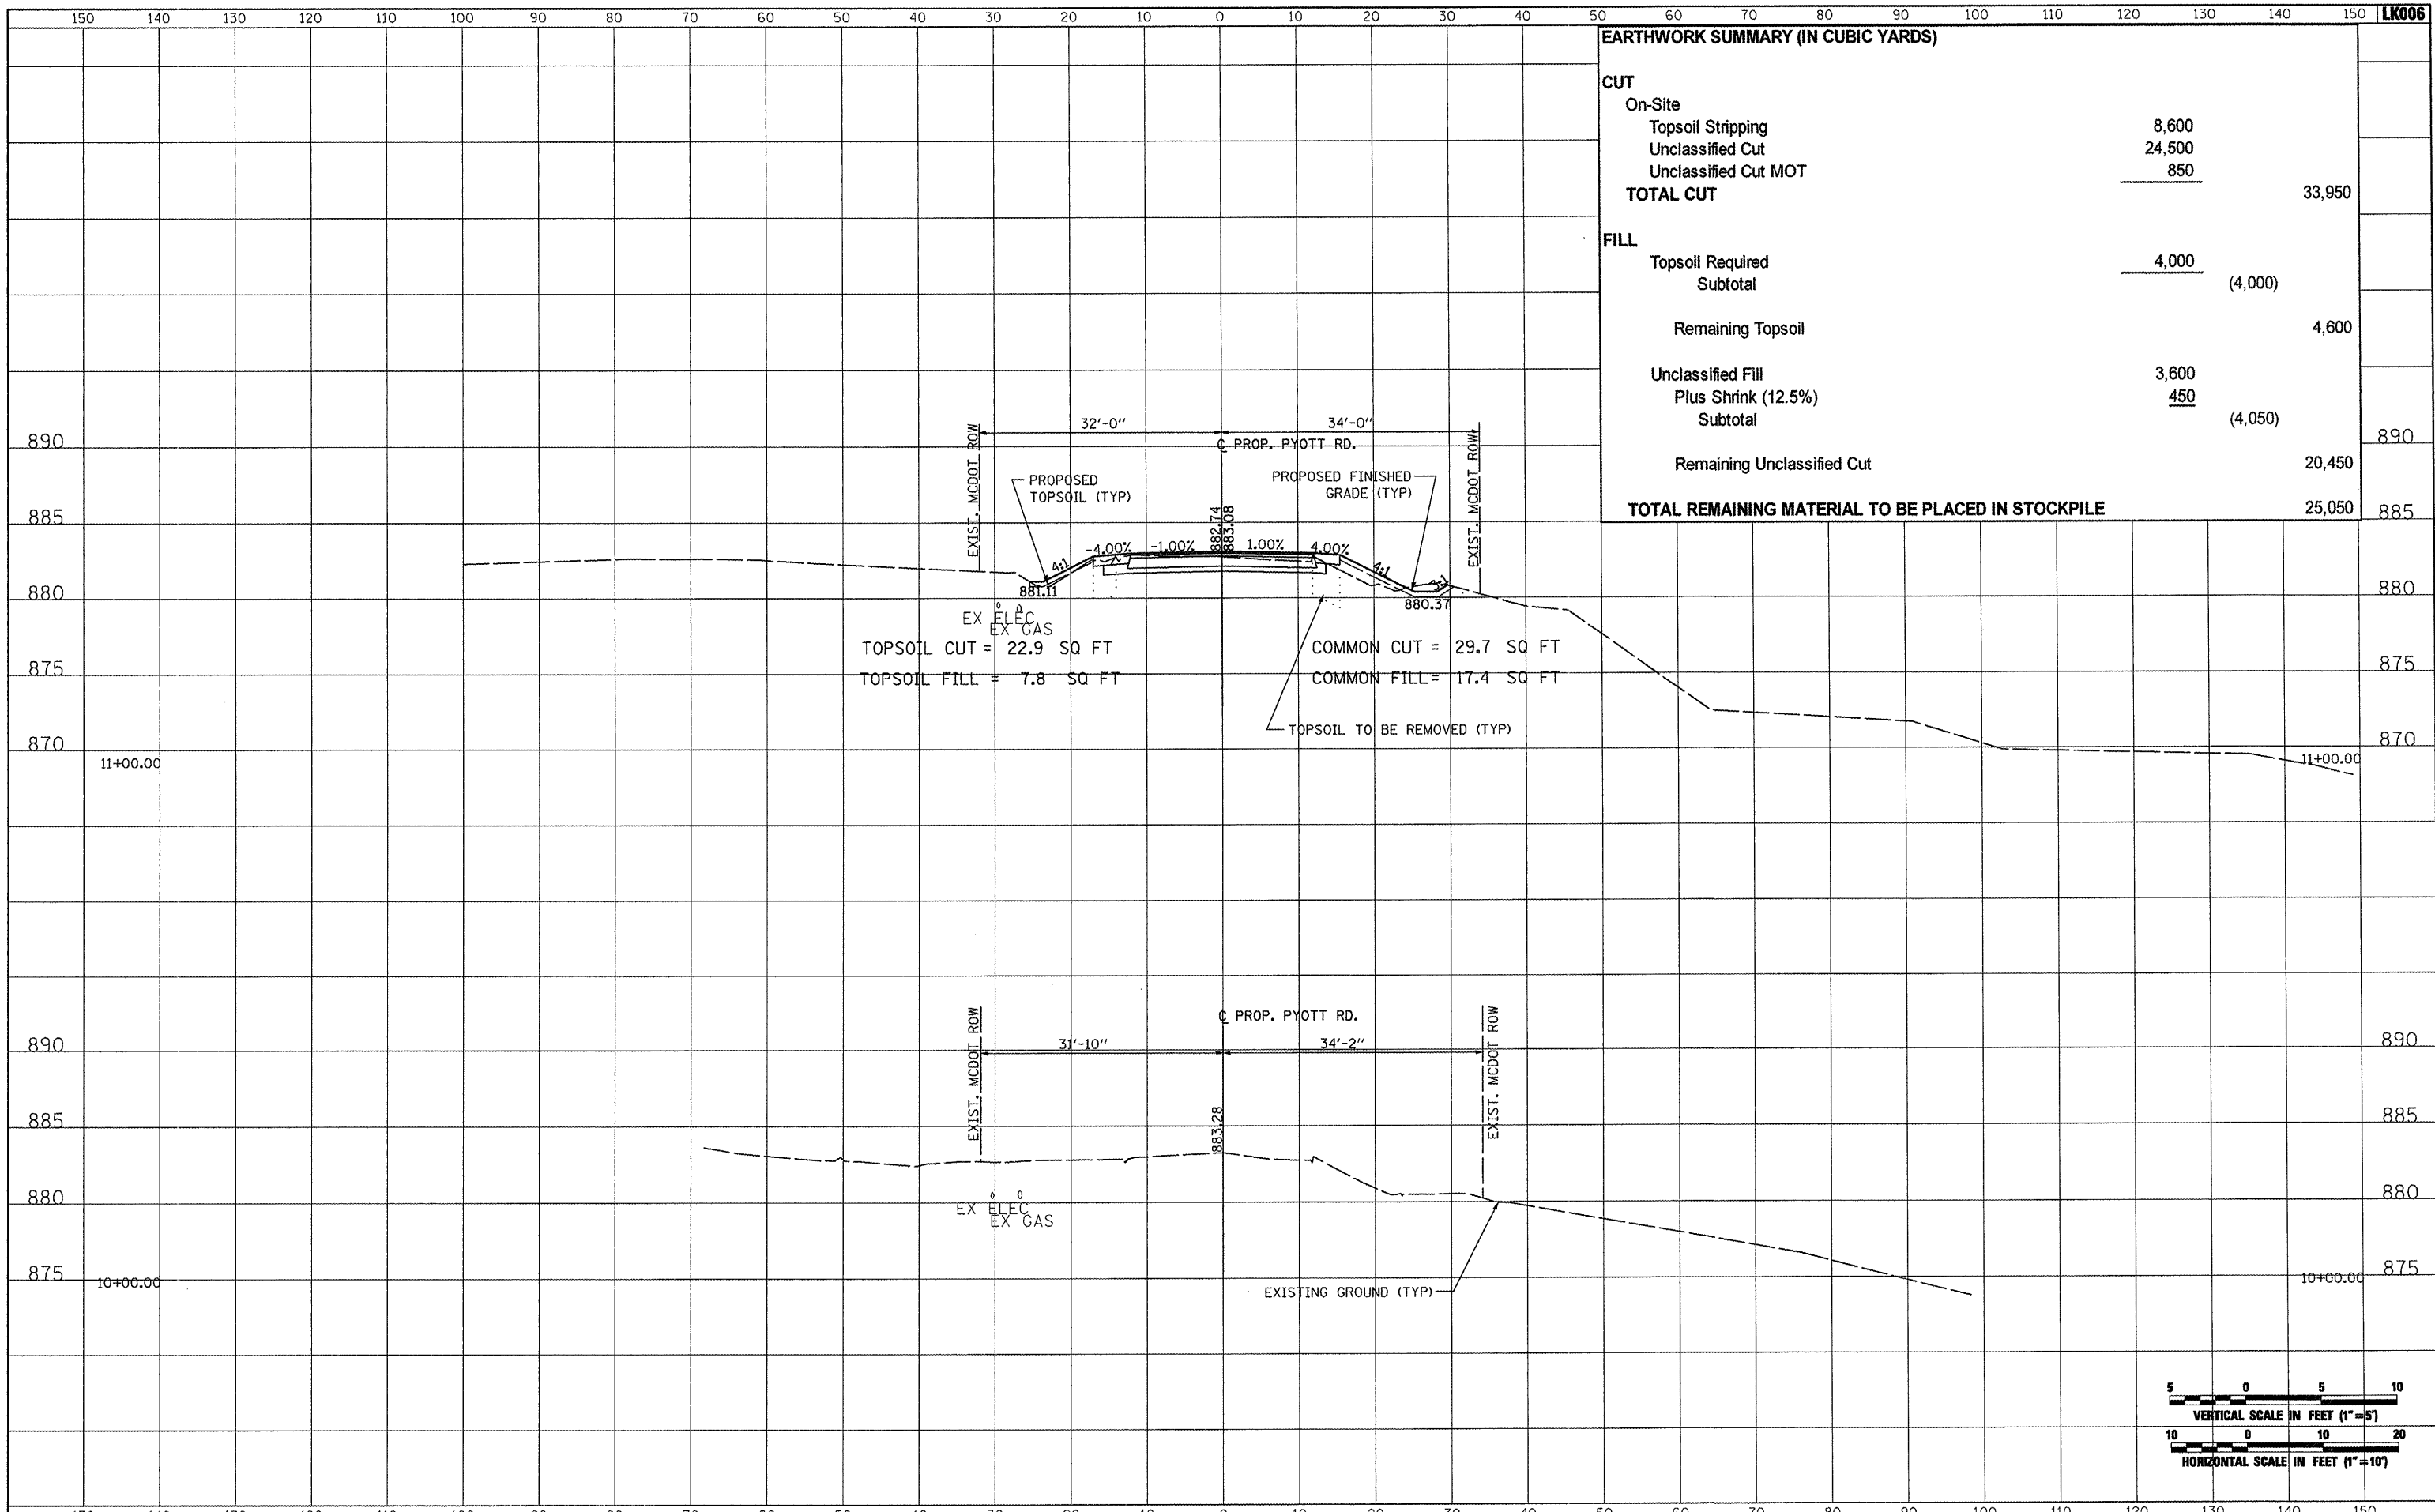

EARTHWORK SUMMARY (IN CUBIC YARDS)		
CUT		
On-Site		
Topsoil Stripping	8,600	
Unclassified Cut	24,500	
Unclassified Cut MOT	850	
TOTAL CUT		33,950
FILL		
Topsoil Required	4,000	
Subtotal		(4,000)
Remaining Topsoil		4,600
Unclassified Fill	3,600	
Plus Shrink (12.5%)	450	
Subtotal		(4,050)
Remaining Unclassified Cut		20,450
TOTAL REMAINING MATERIAL TO BE PLACED IN STOCKPILE		25,050

