

PLAN

SCOPE OF WORK:

1. REMOVE HOT-MIX ASPHALT SURFACE, 2".
2. OVERLAY POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, MIX F, N90, 2".

GENERAL NOTES:


1. PLAN DIMENSIONS AND DETAILS RELATIVE TO EXISTING PLANS ARE SUBJECT TO ROUTINE VARIATIONS. THE CONTRACTOR SHALL FIELD VERIFY EXISTING DIMENSIONS AND DETAILS AFFECTING NEW CONSTRUCTION AND MAKE NECESSARY APPROVED ADJUSTMENTS PRIOR TO CONSTRUCTION OR ORDERING OF MATERIALS SUCH VARIATIONS SHALL NOT BE CAUSE FOR ADDITIONAL COMPENSATION FOR A CHANGE IN SCOPE OF THE WORK, HOWEVER, THE CONTRACTOR WILL BE PAID FOR THE QUANTITY ACTUALLY FURNISHED BASED UPON THE UNIT PRICE BID FOR THE WORK.
2. DO NOT USE VIBRATORY ROLLERS FOR HMA COMPACTION.
3. AT ANY TIME, CONSTRUCTION RELATED LOADING SHALL NOT EXCEED BRIDGE RATING OR LOADING AS DIRECTED BY THE ENGINEER.
4. DO NOT SCALE DIMENSIONS.

TOTAL BILL OF MATERIALS

ITEM	UNIT	QUANTITY
HOT-MIX ASPHALT SURFACE REMOVAL, 2".	SQ. YD.	184
POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, MIX F, N90, 2".	TON	21

TRAFFIC DATA

ADT
 YEAR 2005 = 13,600
 YEAR 2021 = 16,200
 POSTED SPEED LIMIT = 40 MPH

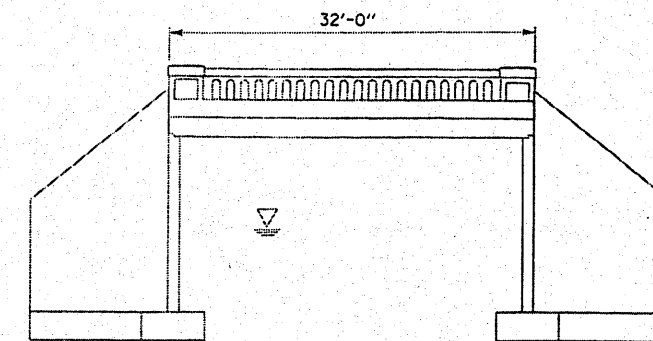

EXISTING ELEVATION VIEW

FILE NAME = c:\projects\struot\1049-0055.dgn	USER NAME = tjnakoasmv	DESIGNED - DRAWN - MVT	REVISED - REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	GENERAL PLAN IL 173 OVER BOAT CHANNEL S.N. 049-0055	F.A.P. RTE. 303	SECTION 200-049 I	COUNTY LAKE	TOTAL SHEETS 49	SHEET NO. 19		
PLDT SCALE = 50.0000' / IN.	CHECKED - RSS	DATE - SEPTEMBER, 2007	REVISED -			SCALE: NONE	SHEET NO. 1 OF 2 SHEETS	STA.	TO STA.	CONTRACT NO. 60D39		
PLDT DATE = 9/14/2007	DATE - SEPTEMBER, 2007	REVISED -	REVISED -			FED. ROAD DIST. NO. [ILLINOIS] FED. AID PROJECT						