



FAP ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO
592	121-1R, 121HVB	ST. CLAIR	239	160
PLANTING DETAILS				

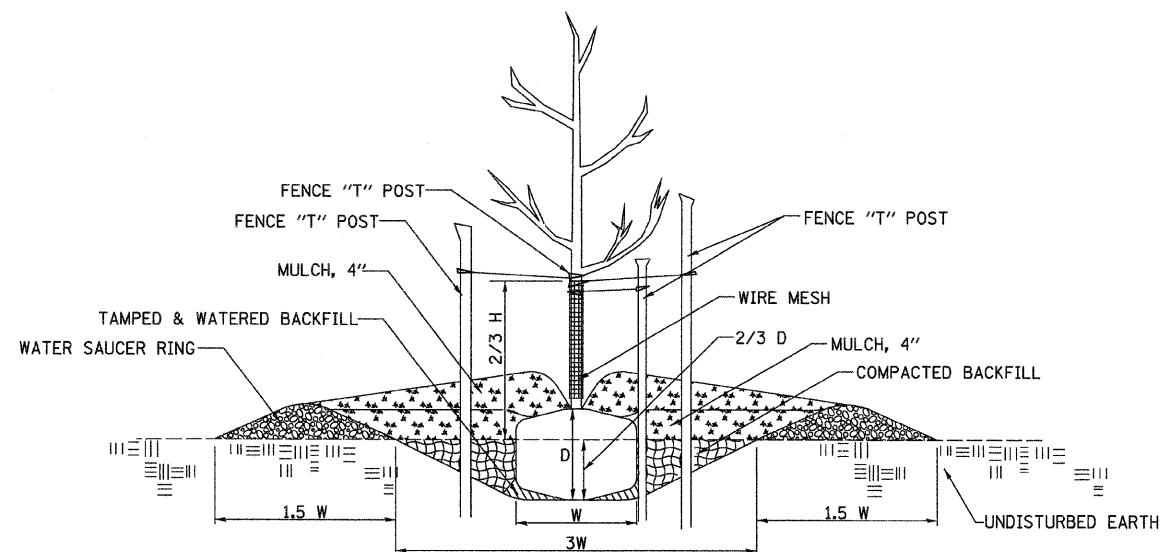

**FLAT GROUND PLANTING DETAIL**

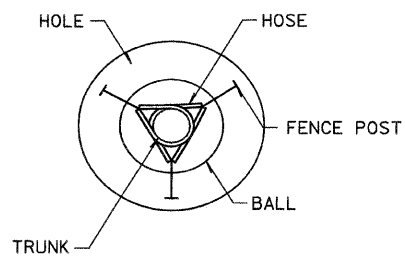

**PLAN**

**BRACING DETAIL**

**NOTES**

EXCESS MATERIAL FROM THE PLANT HOLE EXCAVATIONS SHALL BE DISPOSED OF BY THE CONTRACTOR OFF THE RIGHT OF WAY, OR AS WATER RINGS AS DIRECTED BY THE ENGINEER.

MULCH MATERIALS FOR PLANTING SHALL BE APPROVED BY THE ENGINEER AND CAN CONSIST OF ONE OF THE FOLLOWING: \*

SHREDDED TREE BARK	WOOD CHIPS	BUCKWHEAT HULLS
COTTON SEED HULLS	NUT SHELLS	PREFABRICATED MULCH PADS
CRACKED CORN COBS		

\* FERTILIZER NUTRIENTS SHALL BE APPLIED AT THE RATE OF 2.0 lbs OF ACTUAL N PER 1000 SQ FEET ON TOP OF MULCH AFTER PLACEMENT.

ALL TREES SHALL BE 2" - 3" MINIMUM DIAMETER BALLED AND BURLAPPED.

THE AREAS DEDICATED FOR TREE REPLACEMENT, ALONG WITH THE QUANTITIES AND SPECIES OF THE TREES, ARE SHOWN ON THE STORM WATER POLLUTION PREVENTION PLANS. THE EXACT LOCATION OF THE TREES SHALL BE DETERMINED BY THE ENGINEER AFTER CONSULTING THE VILLAGE OFFICIALS AND THE CONTRACTOR.

PLOT DATE = 03/21/2007  
 FILE NAME = H:\P\21015\Microsites\Design\dt1a062.dgn  
 PLOT SCALE = 50.0000 / IN.  
 USER NAME = BUSENB

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

**PLANTING DETAILS**

FAP ROUTE 592  
 SECTION 121-1R, 121HVB  
 ST. CLAIR COUNTY

DRAWN BY: