CONTRACT NO. 64C90

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
501	(2Y-1)TS-8	WINNEBAGO	9	7
STA.	TO STA.			
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

US BUS 20 WITH PHELPS AVE

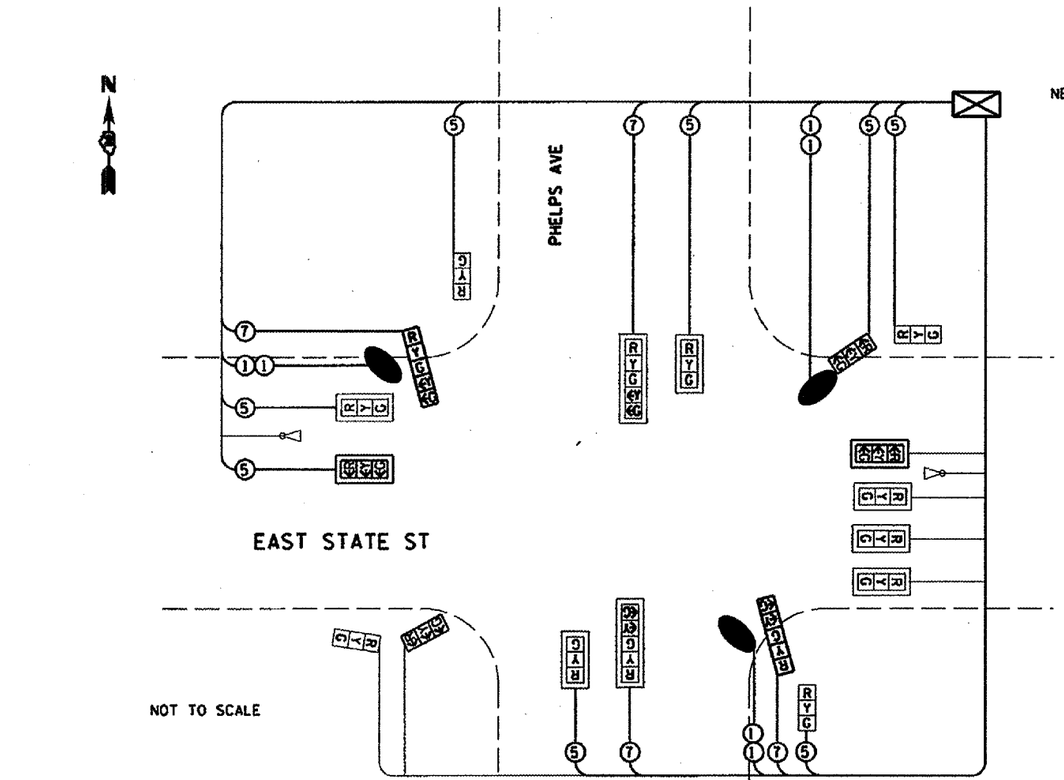

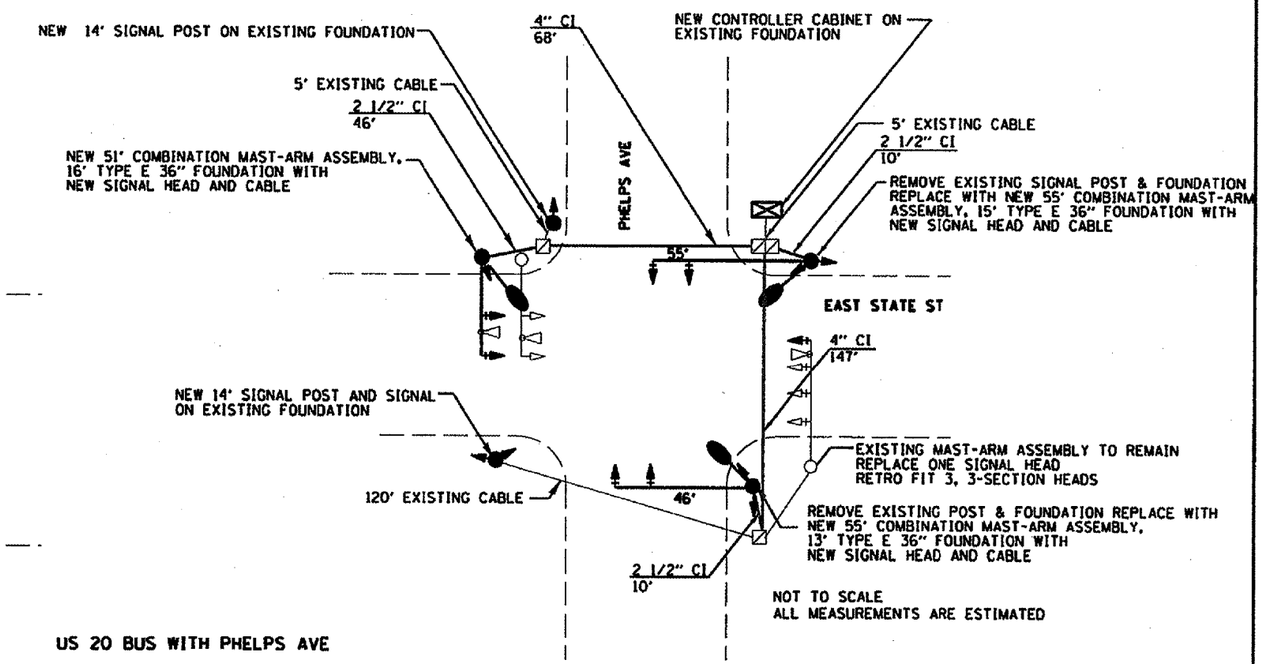

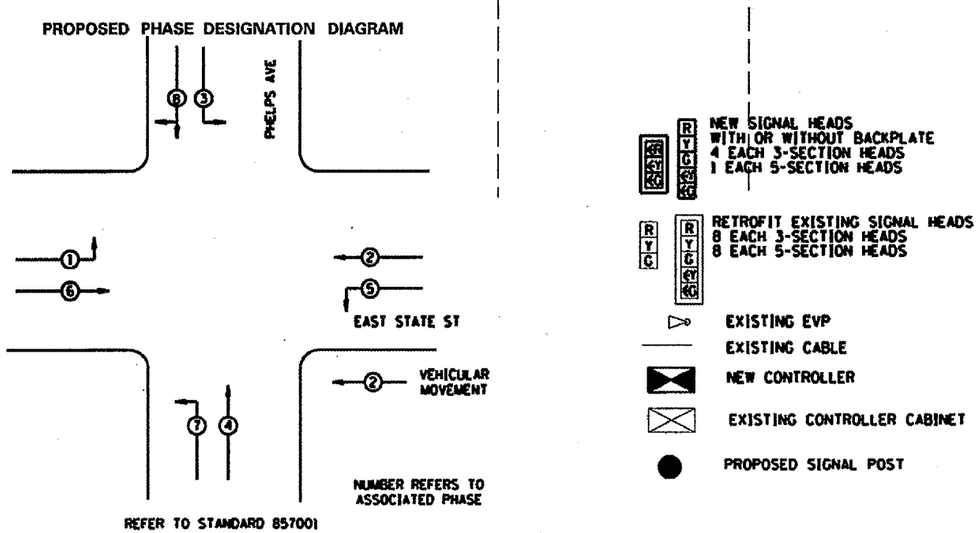

US 20 BUS WITH PHELPS AVE

NOTES:

1. THE ENGINEER SHALL DETERMINE PLACEMENT OF ALL EQUIPMENT.

2. GROUT REMOVAL AND REPLACEMENT WITH SCREENING, THE ONE (1) REMAINING MAST- ARM FOUNDATION.

3. MODIFY EXISTING CONTROLLER TO ACCOMADATE THE PROTECTED LEFT- TURN MOVEMENT OFF THE MAINLINE.

4. THE MOUNTING HEIGHT OF THE LUMINAIRES SHALL BE 35' WITH A 8' ARM.

5. FOLLOWING ITEMS SHALL BE REMOVED AT THIS INTERSECTION BY CONTRACTOR AND RETAINED BY THE CITY OF ROCKFORD THE CONTRACTOR SHALL CONTACT STEVE ERNST WITH THE CITY OF ROCKFORD 81-967-6734. THE PAY CODE REMOVE EXISTING SIGNAL EQUIPMENT, LUMP SUM.

4 EACH SIGNAL POST
1 EACH 1-SECTION SIGNAL HEAD BRACKET MOUNTED
1 EACH 3-SECTION SIGNAL HEAD BRACKET MOUNTED
2 EACH 5-SECTION SIGNAL HEAD MAST- ARM MOUNTED
2 EACH 5-SECTION SIGNAL HEAD BRACKET MOUNTED
1 EACH MAST- ARM ASSEMBLY
1 EACH CONTROLLER AND CABINET

6. ALL EXISTING CABLE SHALL BE REPLACED IN THE MODERNIZATION OF THIS INTERSECTION.

7. THE EMERGENCY VEHICLE PRIORITY SYSTEM SHALL BE RELOCATED TO THE NEW MAST- ARM ASSEMBLIES.

8. RELOCATE FIBER OPTIC MODEM TO THE NEW CONTROLLER CABINET

REVISIONS NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

SCALE: VERT. HORIZ.
DATE
DRAWN BY
CHECKED BY

PLOT DATE = Thu Feb 15 13:36:06 2007
FILE NAME = \\Cdot-2\users\VHILLIS\Projects\US 20 NEW TOWN 3\proposal for us20 64c90.dgn
PLOT SCALE = 42.4115 ' / in.
USER NAME = vhillis